

PRD SERİSİ BASINÇ DÜŞÜRÜCÜ VALFLER

Basınç Düşürücü Valfler, hidrolik sistemlerin farklı bölümlerinde daha düşük basınçları elde etmeye yardımcı olur. Pompa üzerindeki basıncı sabit tutarken hat üzerindeki basıncı düşürmeyi sağlar.
Basınç Düşürücü Valfler ana pompa hattına bağlı alt hattın daha düşük basınçta çalışmasını sağlar. Bu valfler pilot uyarılı çalışma sistemine sahiptirler.



Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları

PRD SERIES PRESSURE REDUCER VALVES


Pressure Reducer Valves helps to achieve lower pressures in different parts of hydraulic systems. It allows you to reduce the pressure on the line while keeping the pressure on the pump constant.
Pressure Reducer Valves allows the lower line connected to the main pump line to operate at lower pressure. These valves have pilot-operated working principle.


Material	Aluminium
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications







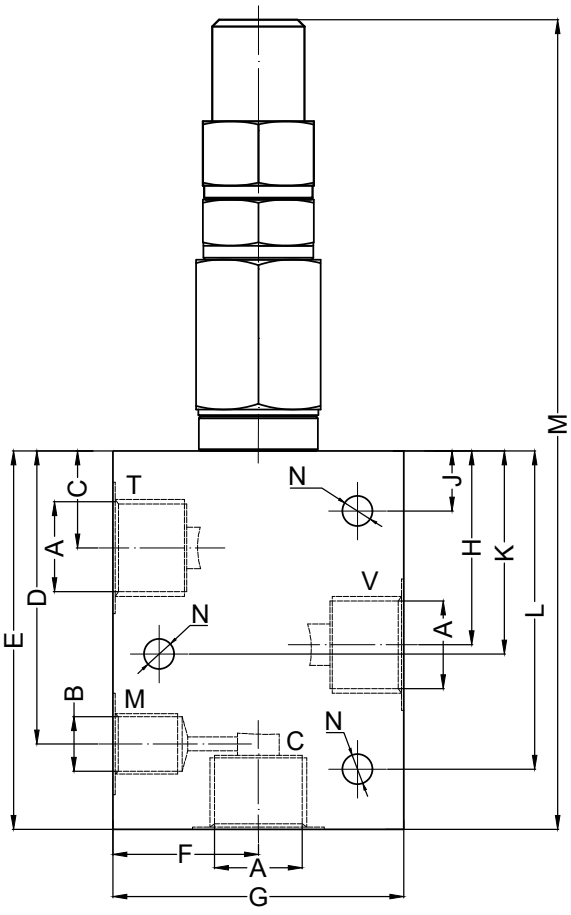

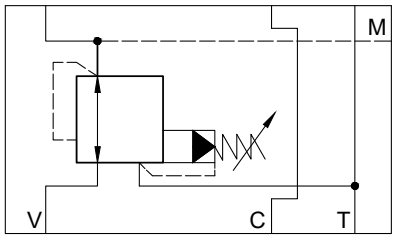

Teknik Özellikler
Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Max. Ayarlanabilir Basınç (Max. Set Pressure)	Ölçüler - mm (Dimensions - mm)												
				A	B	C	D	E	F	G	H	J	K	L	M	N
PRDG38N	350	40	210	3/8" BSP	1/4" BSP	21	63.50	82	31.50	63	42	13	44	69	175.50	Ø6.50
PRDG12N	350	40	210	1/2" BSP	1/4" BSP	21	63.50	82	31.50	63	42	13	44	69	175.50	Ø6.50
PRDG34N	350	80	210	3/4" BSP	1/4" BSP	38	80	105	41.50	83	51	13	51	73	205	Ø8.50

