
NG3 MODULAR MANIFOLD WITH INTEGRAL PILOT OPERATED CHECK VALVES




Dimensions in mm (inches)

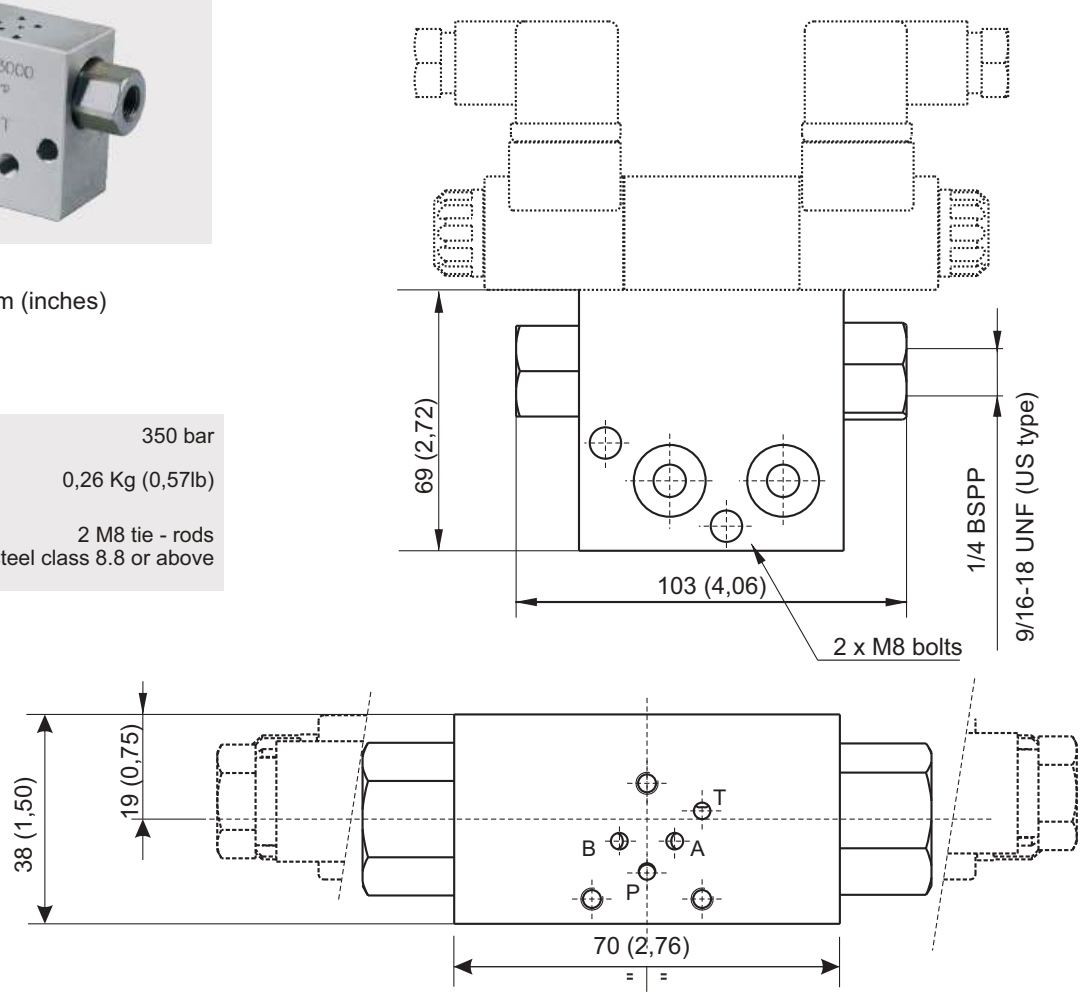


Main features


Max pressure	350 bar
Weight	0,26 Kg (0,57lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above



Spare part code
M60413002
M60413002US*



Spare part code
M60413001
M60413001US*



Spare part code
M60413003
M60413003US*

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
*: US execution with 9/16-18UNF SAE06 exit ports
To add NG3 MICRO external manifolds to a PPC assembly code, just add the converter PPC to PPM first, then the additional manifolds spare part codes at the end of the PPC code. eg: PPC-0,8 12DC-MB-J-K0,6-V200-G-RETURN KIT-1,5L+**EMASH00001+M60403004+M60403010.**
Code does not include the NG3 valve. See SD00 NG3 valves table in section G.