
F12

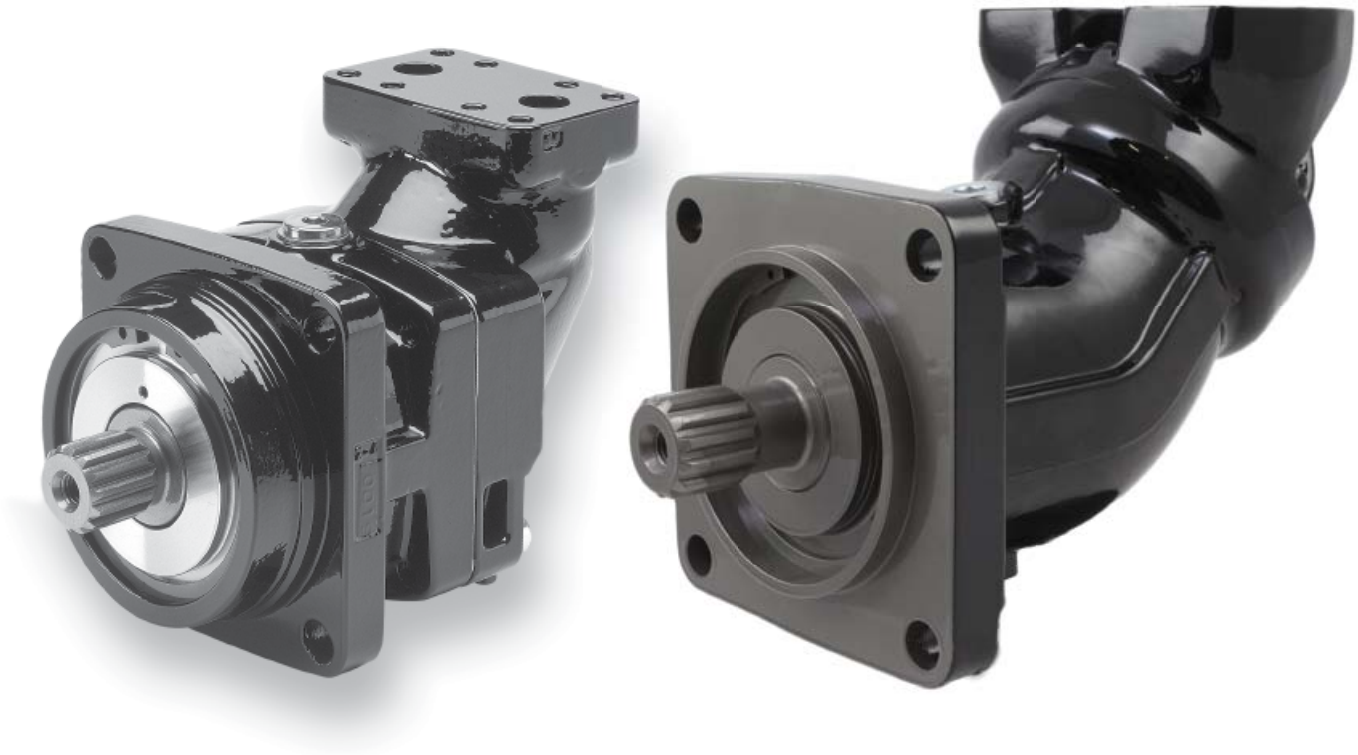

3

Content **Page**

Specifications 40
Efficiency 41
Noise level 41
Selfpriming speed and required inlet pressure 42
Ordering codes
F12-ISO 43
F12-Cartridge 44
F12-SAE 45
Installation dimensions ISO
F12-30, -40, -60, -80, -90, -110 and -125 46
F12-152, -162 and -182 48
Installation dimensions Cartridge
F12-30, -40, -60, -80, -90, -110 and -125 50
Installation dimensions SAE
F12-30, -40, -60, -80, -90, -110 and -125, 4 bolt flange 52
F12-152, -162 and -182 54
F12-250 56
F12-250 Options (SAE version) 57
F12-30, -40, and -60, 2 bolt flange 58

Frame size F12	**-030**	**-040**	**-060**	**-080**	**-090**	**-110**	**-125**	**-152**	**-162**	**-182**	**-250**
Displacement [cm^3/rev]	30.0	40.0	59.8	80.4	93.0	110.1	125.0	149.8	163.1	179.8	242
Operating pressure											
max intermittent[1)] [bar]	480	480	480	480	420	480	480	480	480	480	420
max continuous [bar]	420	420	420	420	350	420	420	420	420	420	350
Motor operating speed [rpm]											
max intermittent [1)]	8600	6700	5800	5300	5000	4800	4600	4000	4000	4000	3000
max continuous [3)]	6700	6100	5300	4800	4600	4400	4200	3700	3700	3700	2700
min continuous	50	50	50	50	50	50	50	50	50	50	50
Max pump selfpriming speed [2)]											
L or R function; max [rpm]	3150	2870	2500	2300	2250	2200	2100	1700	1600	1500	1500
Motor input flow											
max intermittent[1)] [l/min]	219	268	347	426	465	528	575	608	648	728	726
max continuous [l/min]	201	244	317	386	428	484	525	547	583	655	653
Drain temperature[3)], max [°C]	115	115	115	115	115	115	115	115	115	115	115
min [°C]	-40	-40	-40	-40	-40	-40	-40	-40	-40	-40	-40
Theoretical torque at 100 bar [Nm]	47.6	63.5	94.9	127.6	147.6	174.8	198.4	241	257	289	384.1
Mass moment of inertia											
($x10^{-3}$) [kg m^2]	1.7	2.9	5	8.4	8.4	11.2	11.2	21	21	21	46
Weight [kg]	11.5	15.7	18.6	25.7	25.7	33	33	40	40	40	77

1) Intermittent: max 6 seconds in any one minute.
2) Selfpriming speed valid at sea level. Find more info on page 42
3) See also installation information. Page 69

Efficiency


Because of its high overall efficiency, driving a motor/pump from series F12 requires less fuel or electric power.

Also, it allows the use of a small reservoir and heat exchanger, which in turn reduce cost, weight, and installation size.

The diagrams to the right show volumetric and mechanical efficiencies of an F12-030 motor.

F12-030 motors can be equipped with Power Boost which in high speed applications can decrease the mechanical losses by up to 15%, see page 7.

Contact Parker Hannifin for efficiency information on a particular F12 frame size that is being considered.

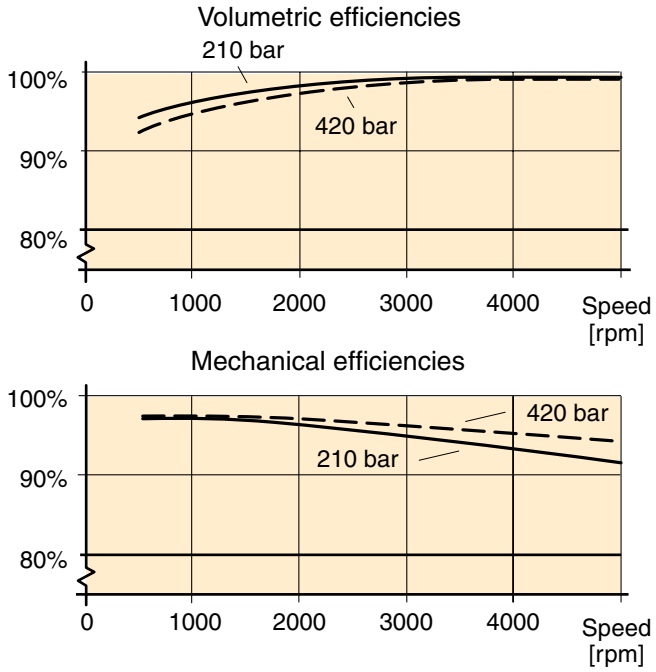


Noise level

Series F12 feature low noise levels from low to high speeds and pressures.

As an example, the diagram to the right shows the noise level of an F12-030 pump/motor.

The noise level is measured in a semi-anechoic room, 1 m behind the unit.

The noise level for a particular motor/pump may vary ±2 dB(A) compared to what is shown in the diagram.

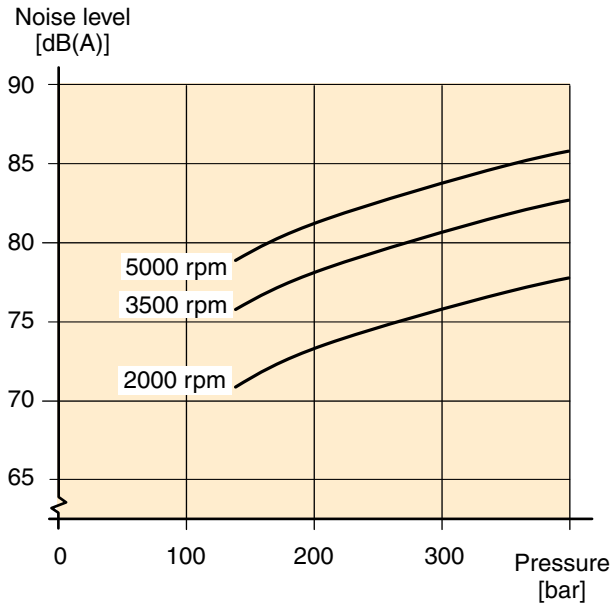

NOTE: Noise information for F12 frame sizes are available from Parker Hannifin.

Selfpriming speed and required inlet pressure

Series F12

When operating the F12 as a pump (with L or R valve plate) above the selfpriming speed, the inlet must be pressurized. Increased noise and deteriorating performance may otherwise be experienced.

Diagrams 2 and 3 shows required pump inlet pressure vs. shaft speed.

The F12 motor (type M valve plate) sometimes operates as a pump e.g. when used in a propel transmission and the vehicle is going downhill.

Minimum required inlet pressure versus shaft speed is shown in the diagrams.

The inlet pressure can be charged by external pump, pressurized reservoir or using BLA Boost unit.

Find more info about the BLA unit at page 68.

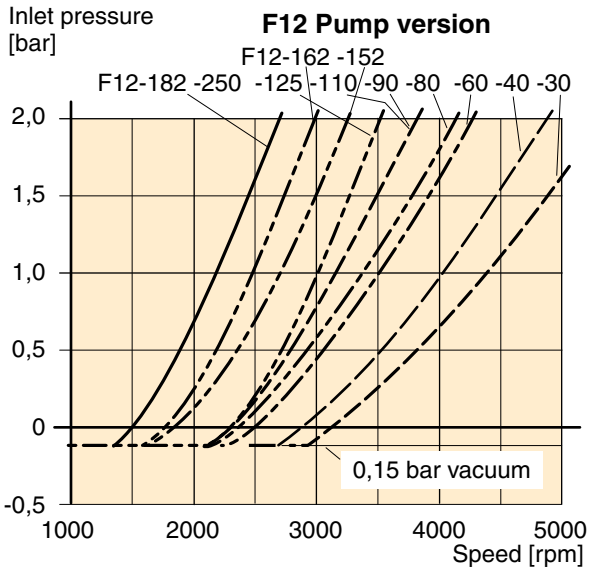


Diagram 2. Min. required pump (F12-L or -R) inlet press.

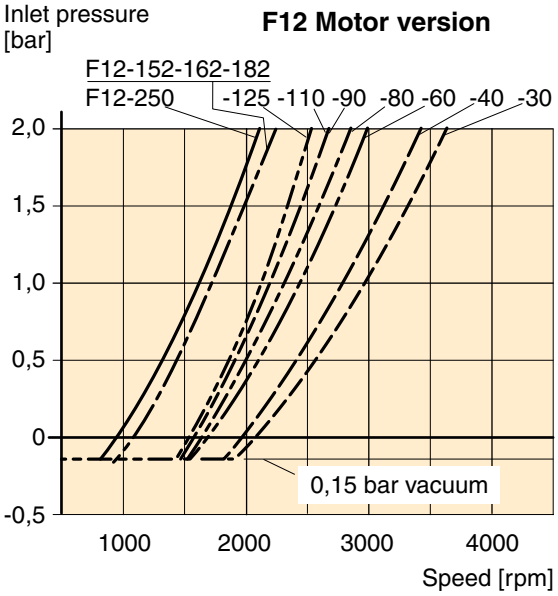


Diagram 3. Min. required motor (F12-M) inlet pressure.

F12-ISO — [ ] — [ ] [ ] — [ ] [ ] — [ ] — [ ] — [ ] — [ ] — [ ] — [ ]

Frame size · Function · Main ports · Mounting flange · Shaft seal · Shaft · Version number · Option page 6, 61 · Option page 7, 67

Frame size	
Code	Displacem. (cm^3/rev)
030	30.0
040	40.0
060	59.8
080	80.4
090	93.0
110	110.1
125	125.0
152	149.8
162	163.1
182	179.8

Version number
(assigned for special versions)

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Function										
M	Motor	x	x	x	x	x	x	x	x	x	x
S	Motor, high speed	(x)	(x)	(x)	-	-	-	-	(x)	(x)	(x)
R	Pump, clockwise rotation	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)
L	Pump, counter clockwise rot'n	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)

For other versions, contact Parker Hannifin

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Main ports										
F	SAE 6000 psi flange	x	x	x	x	x	x	x	x	x	x
D	SAE 6000 psi Horizontal	-	-	-	-	-	-	-	(x)	(x)	(x)
A	SAE 6000 psi Axial	-	-	-	-	-	-	-	(x)	(x)	(x)
K	SAE 6000 psi Rear	-	-	-	-	-	-	-	(x)	(x)	(x)
M	SAE 6000 psi Side	-	-	-	-	-	-	-	(x)	(x)	(x)

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Mounting flange										
I	ISO flange	x	x	x	x	x	x	x	x	x	x
F	ISO 200 flange	-	-	-	-	-	-	-	x	x	x

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Shaft*										
D	DIN Spline, Standard	x	x	x	x	x	x	x	x	x	x
A	DIN Spline, Optional	-	(x)	-	-	-	-	-	-	-	-
Z	DIN Spline, Optional	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)
K	Metric key, Standard	x	x	x	x	x	x	x	x	x	x
J	Metric key, Optional	-	(x)	-	-	-	-	-	-	-	-
H	DIN Spline, Optional	-	-	-	-	-	-	-	(x)	(x)	(x)
G	Metric key, Optional	-	-	-	-	-	-	-	(x)	(x)	(x)
P	Metric key, Optional	(x)	-	-	-	-	-	-	(x)	(x)	(x)
V	Tapered shaft	(x)	(x)	(x)	-	-	(x)	(x)	-	-	-

*See also dimensional drawings on pages 46 and 48.

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Option										
0000	Standard	x	x	x	x	x	x	x	x	x	x
L130	Flushing valve 1.3 mm orifice	(x)	(x)	(x)	(x)	(x)	-[1]	-[1]	-	-	-
MUVR	Make up/Anti cavitation valve clockwise rotation	(x)	-	-	-	-	-	-	-	-	-
MUVL	Make up/Anti cavitation valve counter clockwise rotation	(x)	-	-	-	-	-	-	-	-	-
P__R[2]	Pressure relief valve clockwise rotation	(x)	(x)	(x)	-	-	-	-	-	-	-
P__L[2]	Pressure relief valve counter clockwise rotation	(x)	(x)	(x)	-	-	-	-	-	-	-

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Option										
P0	Prepared for speed sensor	x	x	x	x	x	x	x	x	x	x
PT	Prepared for speed sensor and Painted Black	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)
B0	Power Boost and Prepared for speed sensor	(x)	-	-	-	-	-	-	-	-	-
BT	Power Boost, Prepared for speed sensor and Painted Black	(x)	-	-	-	-	-	-	-	-	-

Frame size		30	40	60	80	90	110	125	152	162	182
Code	Shaft seal										
V	FPM, high pressure, high temperature	x	x	x	x	x	x	x	x	x	x

For other versions, contact Parker Hannifin

x: Available (x): Optional – : Not available

1) F12-110 and -125: Accessory valve block (page 62)

2) Pressure setting on page 63

NOTE: All combinations are not valid, please contact Parker Hannifin

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

F12 — □ — □ — □ □ — □ □ — □ — □ — □ — □ — □

Frame size | Function | Main ports | Mounting flange | Shaft seal | Shaft | Version number | Option page 6, 61 | Option page 7, 67

F12-Cartridge

Frame size	
Code	Displacem. (cm^3/rev)
030	30.0
040	40.0
060	59.8
080	80.4
090	93.0
110	110.1
125	125.0

Version number
(assigned for special versions)

Frame size		30	40	60	80	90	110	125
Code	Shaft*							
C	DIN Spline, Std.	x	x	x	x	x	x	x
K	Metric key, Option	(x)	-	(x)	(x)	(x)	(x)	(x)
J	Metric key, Option	-	(x)	-	-	-	-	-
B	Spline DIN 5480	-	-	(x)	-	-	(x)	(x)
V	Tapered shaft	(x)	(x)	(x)	-	-	(x)	(x)

*See also dimensional drawings on page 50.

Frame size		30	40	60	80	90	110	125
Code	Function							
M	Motor	x	x	x	x	x	x	x
S	Motor, high speed	(x)	(x)	(x)	-	-	-	-

For other versions, contact Parker Hannifin

Frame size		30	40	60	80	90	110	125
Code	Option							
0000	Standard	x	x	x	x	x	x	x
L130	Flushing valve 1.3 mm orifice	(x)	(x)	(x)	(x)	(x)	-[1]	-[1]
MUVR	Make up/Anti cavitation valve clockwise rotation	(x)	-	-	-	-	-	-
MUVL	Make up/Anti cavitation valve counter clockwise rotation	(x)	-	-	-	-	-	-
P__R [2]	Pressure relief valve clockwise rotation	(x)	(x)	(x)	-	-	-	-
P__L [2]	Pressure relief valve counter clockwise rotation	(x)	(x)	(x)	-	-	-	-

Frame size		30	40	60	80	90	110	125
Code	Main ports							
F	SAE 6000 psi flange	x	x	x	x	x	x	x

Frame size		30	40	60	80	90	110	125
Code	Option							
P0	Prepared for speed sensor	x	x	x	x	x	x	x
PT	Prepared for speed sensor and Painted Black	(x)	(x)	(x)	(x)	(x)	(x)	(x)
B0	Power Boost and Prepared for speed sensor	(x)	-	-	-	-	-	-
BT	Power Boost, Prepared for speed sensor and Painted Black	(x)	-	-	-	-	-	-

Frame size		30	40	60	80	90	110	125
Code	Mounting flange							
C	Cartridge	x	x	x	x	x	x	x

Frame size		30	40	60	80	90	110	125
Code	Shaft seal							
V	FPM, high pressure, high temperature	x	x	x	x	x	x	x

For other versions, contact Parker Hannifin

x: Available (x): Optional – : Not available

1) F12-110 and -125: Accessory valve block (page 62)

2) Pressure setting on page 63

NOTE: All combinations are not valid, please contact Parker Hannifin

F12-SAE — Frame size — Function — Main ports — Mounting flange — Shaft seal — Shaft — Version number — Option page 6, 61 — Option page 7, 67

Frame size	
Code	Displacem. (cm^3/rev)
030	30.0
040	40.0
060	59.8
080	80.4
090	93.0
110	110.1
125	125.0
152	149.8
162	163.1
182	179.8
250	242.0

Version number
(assigned for special versions)

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Function											
M	Motor	x	x	x	x	x	x	x	x	x	x	-
S	Motor, high speed	(x)	(x)	(x)	-	-	-	-	(x)	(x)	(x)	-
Q	Motor	-	-	-	-	-	-	-	-	-	-	x
R	Pump, clockwise rotation	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)
L	Pump, counter clockwise rot'n	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)

For other versions, contact Parker Hannifin

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Main ports											
S	SAE 6000 psi flange	x	x	x	x	x	x	x	-	-	-	-
U	SAE UN threads [4]	(x)	(x)	(x)	(x)	(x)	(x)	(x)	-	-	-	-
F	SAE 6000 psi flange [2]	-	-	-	-	-	-	-	x	x	x	x
D	SAE 6000 psi Horizontal [2]	-	-	-	-	-	-	-	(x)	(x)	(x)	-
A	SAE 6000 psi Axial [2]	-	-	-	-	-	-	-	(x)	(x)	(x)	-
K	SAE 6000 psi Rear [2]	-	-	-	-	-	-	-	(x)	(x)	(x)	-
M	SAE 6000 psi Side [2]	-	-	-	-	-	-	-	(x)	(x)	(x)	-

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Mounting flange											
S	SAE 4 bolt	x	x	x	x	x	x	x	x	x	x	x
R	SAE 4 bolt	-	-	-	(x)	(x)	-	-	-	-	-	-
T	SAE 2 bolt	x	x	x	-	-	-	-	-	-	-	-

x: Available (x): Optional – : Not available

1) F12-110 and -125: Accessory valve block (page 62)
2) Metric threads
3) Pressure setting on page 63
4) Not in combination with any valve options

NOTE: All combinations are not valid, please contact Parker Hannifin

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Shaft*											
T	SAE key, Standard	x	x	x	x	x	x	x	x	x	x	x
R	SAE key, Optional	-	-	-	(x)	(x)	-	-	-	-	-	-
S	SAE Spline, Optional	x	x	x	x	x	x	x	x	x	x	x
F	SAE Spline, Optional	-	-	-	(x)	(x)	-	-	(x)	(x)	(x)	(x)
U	SAE Spline, Optional	-	-	-	(x)	(x)	-	-	-	-	-	-
K	Metric key, Standard	-	-	-	-	-	-	-	-	-	-	x
D	Spline DIN 5480	-	-	-	-	-	-	-	-	-	-	(x)
V	Tapered shaft	(x)	(x)	(x)	-	-	(x)	(x)	-	-	-	-

*See also dimensional drawings on pages 52 - 59.

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Option											
0000	Standard	x	x	x	x	x	x	x	x	x	x	x
L130	Flushing valve 1.3 mm orifice	(x)	(x)	(x)	(x)	(x)	-[1]	-[1]	-	-	-	-
MUVR	Make up/Anti cavitation valve clock-wise rotation	(x)	-	-	-	-	-	-	-	-	-	-
MUVL	Make up/Anti cavitation valve counter clockwise rotation	(x)	-	-	-	-	-	-	-	-	-	-
P__R [3]	Pressure relief valve clockwise rotation	(x)	(x)	(x)	-	-	-	-	-	-	-	-
P__L [3]	Pressure relief valve counter clock-wise rotation	(x)	(x)	(x)	-	-	-	-	-	-	-	-


Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Option											
00	Standard	-	-	-	-	-	-	-	-	-	-	x
P_	Prepared for speed sensor	x	x	x	x	x	x	x	x	x	x	(x)
B_	Power Boost and Prepared for speed sensor	(x)	-	-	-	-	-	-	-	-	-	-
_T	Painted Black	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)	(x)

Frame size		30	40	60	80	90	110	125	152	162	182	250
Code	Shaft seal											
V	FPM, high pressure, high temperature	x	x	x	x	x	x	x	x	x	x	x


For other versions, contact Parker Hannifin

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

F12-30, -40, -60, -80, -90, -110 and -125
(ISO versions)

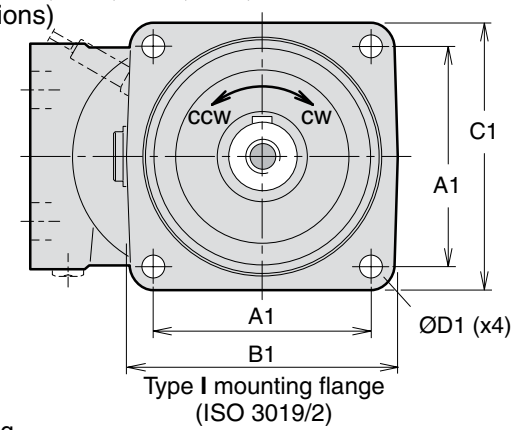



Type **I** mounting flange
(ISO 3019/2)

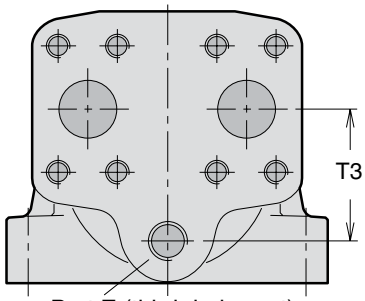


Port **E** (third drain port)
F12-110 and -125 barrel housing
(ISO /cartridge version)

F12-80 shown

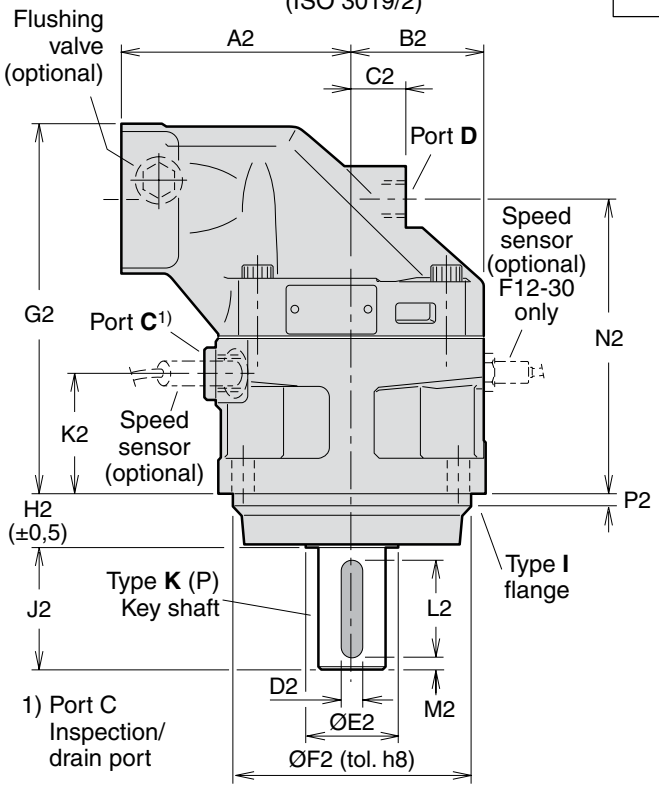

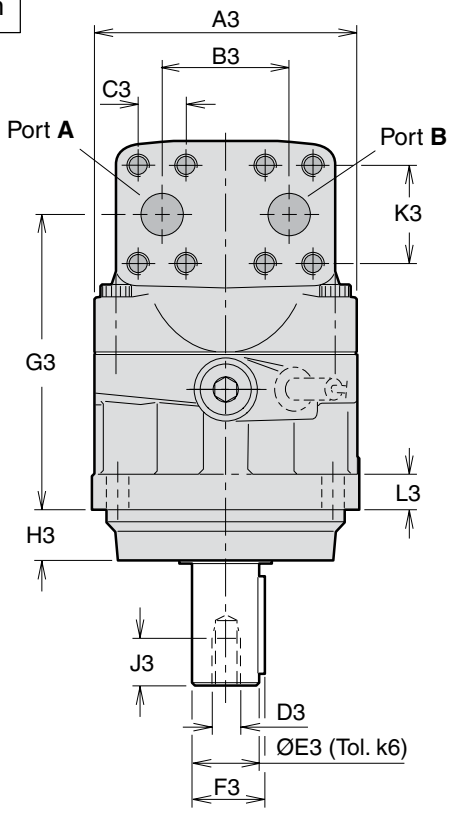


Shaft option D (Z)

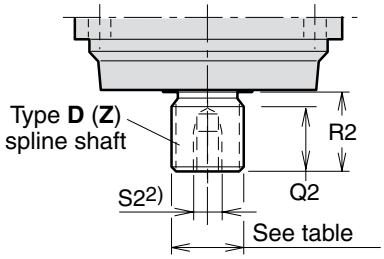


2) Type Z has no thread

Shaft option V (F12-30)




Tapered key shaft "**V**"
SAE J744 32-3 (C)

Shaft option V (F12-40)

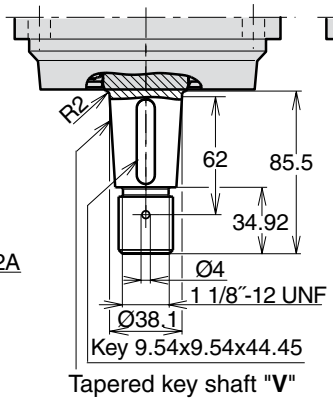

Tapered key shaft "**V**"
SAE J744 38-3 (C-C)

Shaft option V (F12-60)

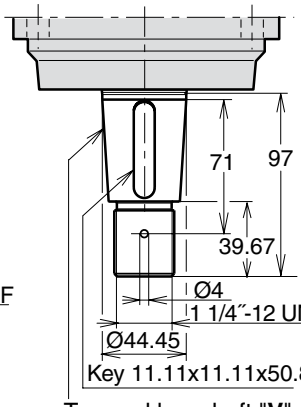

Tapered key shaft "**V**"
SAE J744 44-3 (D&E)

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

Dim.	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A1	88.4	113.2	113.2	127.2	141.4
B1	118	146	146	158	180
C1	118	142	144	155	180
D1	11	13.5	13.5	13.5	18
A2	100	110	125	135	145
B2	59	65	70	78	85
C2	25	26	22	32	38
D2	8	8	10	12	14
E2	33	42	42	52	58
F2	100	125	125	140	160
G2	172	173	190	216	231
H2	25.5	32.5	32.5	32.5	40.5
J2	50	60	60	70	82
K2	55	52	54	70.5	66.5
L2	40	50	50	56	70
M2	5	5	5	7	6
N2	136.5	137	154	172.5	179
P2	8	8	8	8	8
Q2	28	28	33	36	41
R2[1)]	35	35	40	45	50
R2[2)]	43	35	35	35	45
S2[1)]	M12 x24	M12 x24	M12 x28	M16 x36	M16 x36
S2[2)]	-	M12 x24	-	M12 x28	-
A3	122	134	144	155	170
B3	66	66	66	75	83
C3	23.8	23.8	23.8	27.8	31.8
D3	M12	M12	M12	M16	M16
E3	30	30	35	40	45
F3	33	33	38	43	49
G3	136.5	137	154	172.5	179
H3	23.5	30.5	30.5	30.5	38.5
J3	24	24	28	36	36
K3	50.8	50.8	50.8	57.2	66.7
L3	18	20	20	20	22
T3	-	-	-	-	68

1) Spline shaft type D
2) Spline shaft type Z
3) Max operating pressure 350 bar

Ports	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A, B size	3/4"	3/4"	3/4"	1"	1 1/4"
Screw thread*)	M10 x20	M10 x20	M10 x20	M12 x20	M14 x26
C thread**)	M22 x1.5	M22 x1.5	M22 x1.5	M22 x1.5	M22 x1.5
D thread**)	M18 x1.5	M18 x1.5	M22 x1.5	M22 x1.5	M22 x1.5
E thread	-	-	-	-	M22 x1.5

A, B: ISO 6162

*) Metric thread x depth in mm
**) Metric thread x pitch in mm.

Spline shaft (DIN 5480)


	Type **D** (std)	Type **A**	Type **Z** (optional)
F12-30	W30x2x14x9g	-	W25x1.25x18x9g[3)]
-40	W32x2x14x9g	W35x2x16x9g	W30x2x14x9g
-60	W35x2x16x9g	-	W32x2x14x9g
-80	W40x2x18x9g	-	W35x2x16x9g[3)]
-90	W40x2x18x9g	-	W35x2x16x9g[3)]
-110	W45x2x21x9g	-	W40x2x18x9g[3)]
-125	W45x2x21x9g	-	W40x2x18x9g[3)]

Key shaft

	Type **K** (std)	Type **P** (opt.)	Type **J** (opt.)	Type **V** (opt.)
F12-30	Ø30	Ø25[3)]	-	32-3
-40	Ø30	-	Ø35	38-3
-60	Ø35	-	-	44-3
-80	Ø40	-	-	-
-90	Ø40	-	-	-
-110	Ø45	-	-	44-3
-125	Ø45	-	-	44-3

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden


F12-152, -162 and -182
(ISO versions)

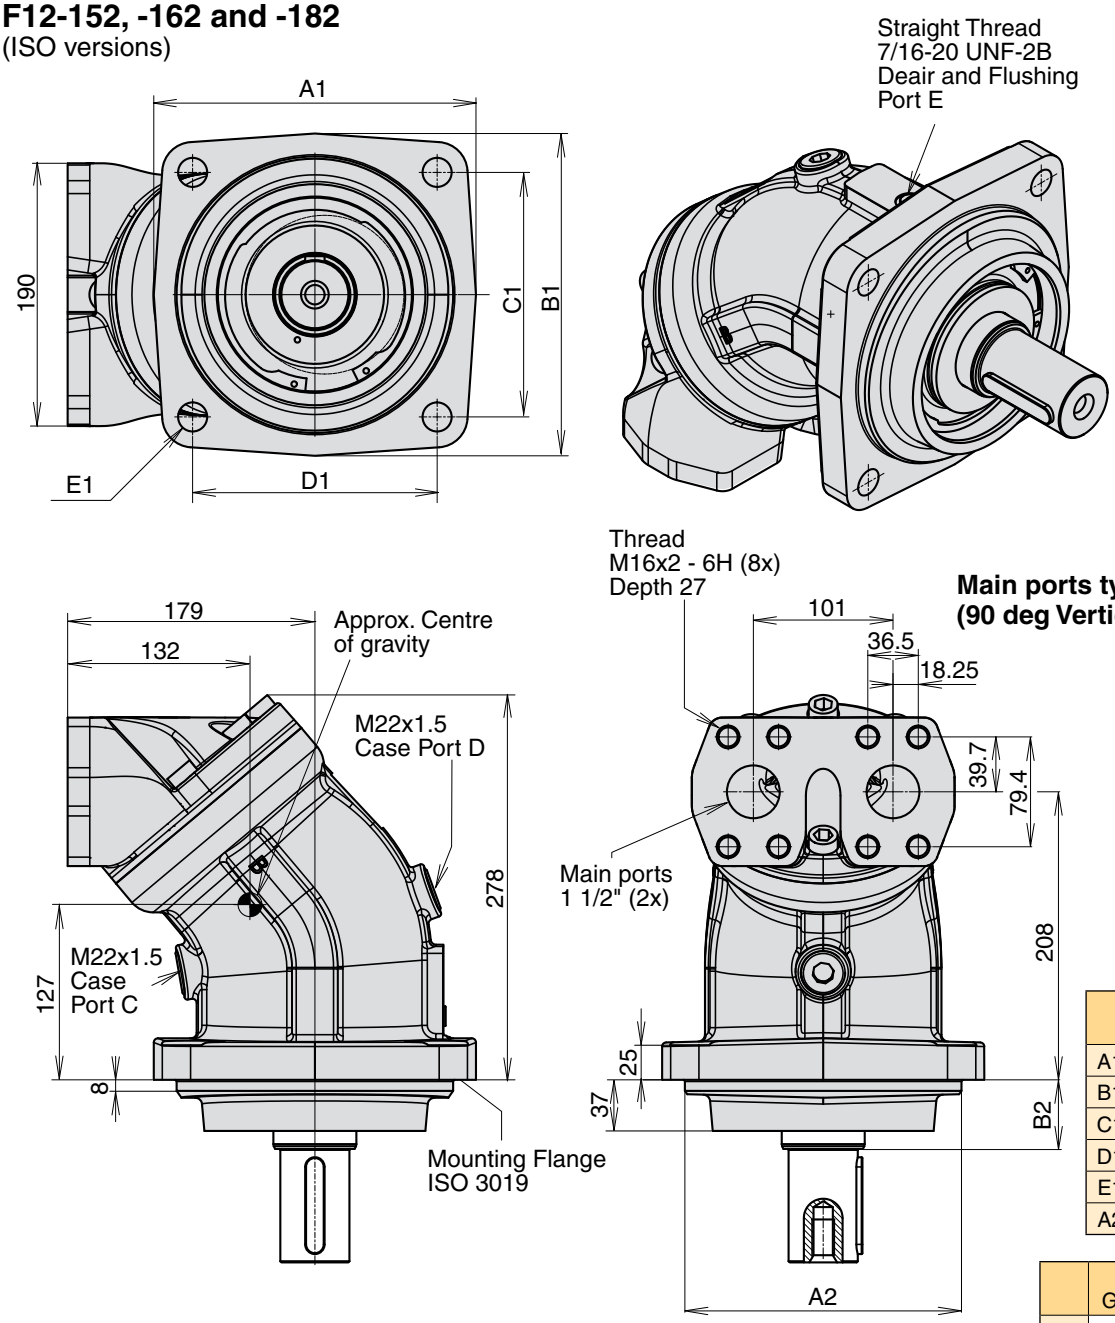


	ISO 180 (type I)	ISO 200 (type F)
A1	210	233
B1	210	233
C1	158.4	176.8
D1	158.4	176.8
E1	Ø18	Ø21
A2	180 h8	200 h8

	Shaft G and H	Shaft D, Z, K and P
B2	50	40


Shaft options K and G

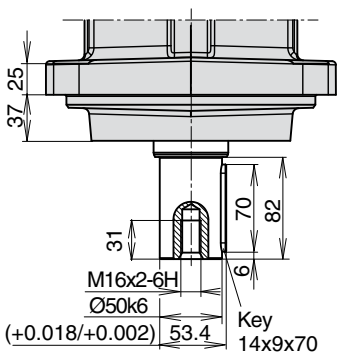


Shaft option P



Shaft option D




Shaft options Z and H




Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

F12-152, -162 and -182
(ISO versions)


Main ports type A (180 deg Vertical)

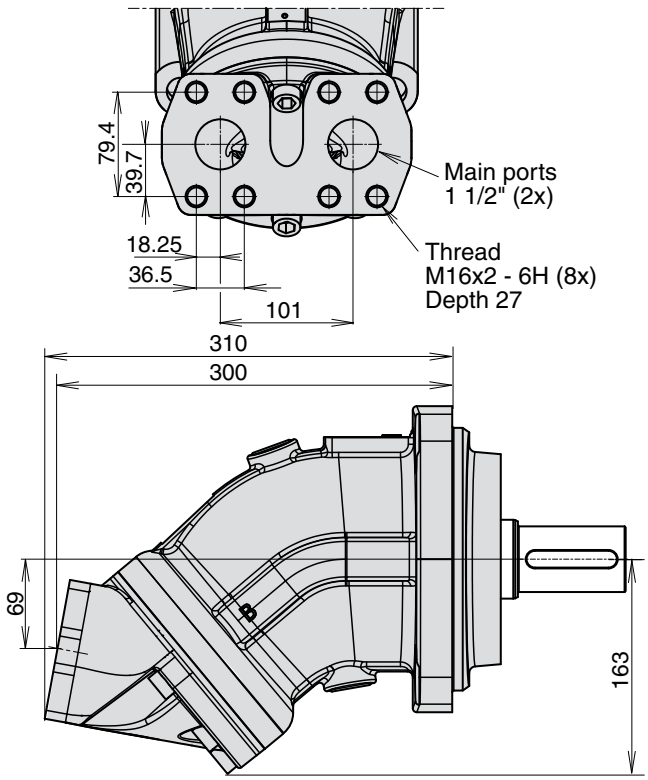


Main ports type D (90 deg Horizontal)

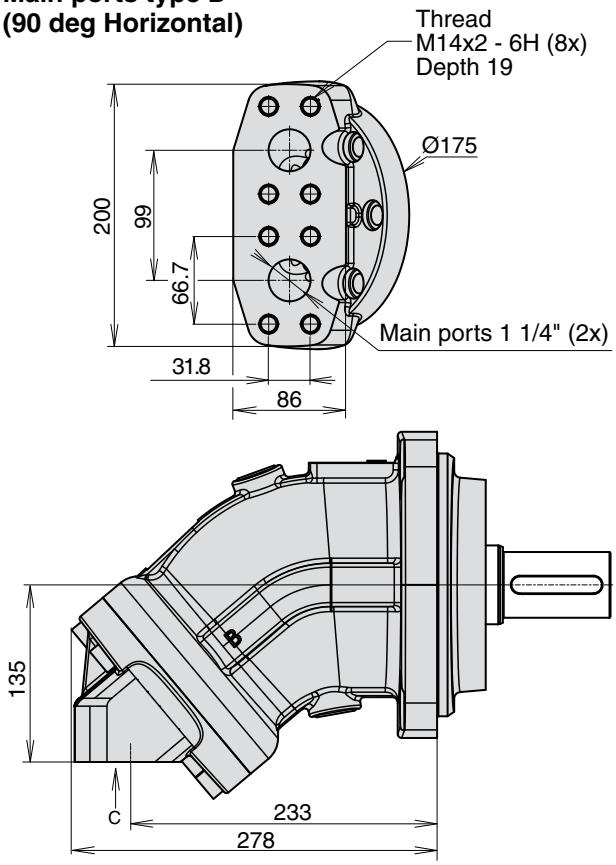

Main ports type K (40 deg rear)

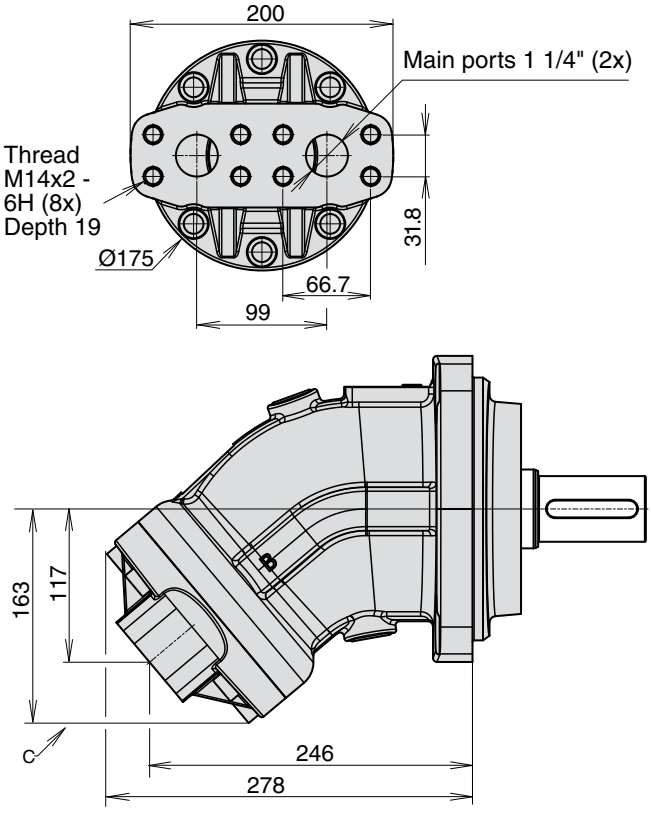

Main ports type M (Side ports)

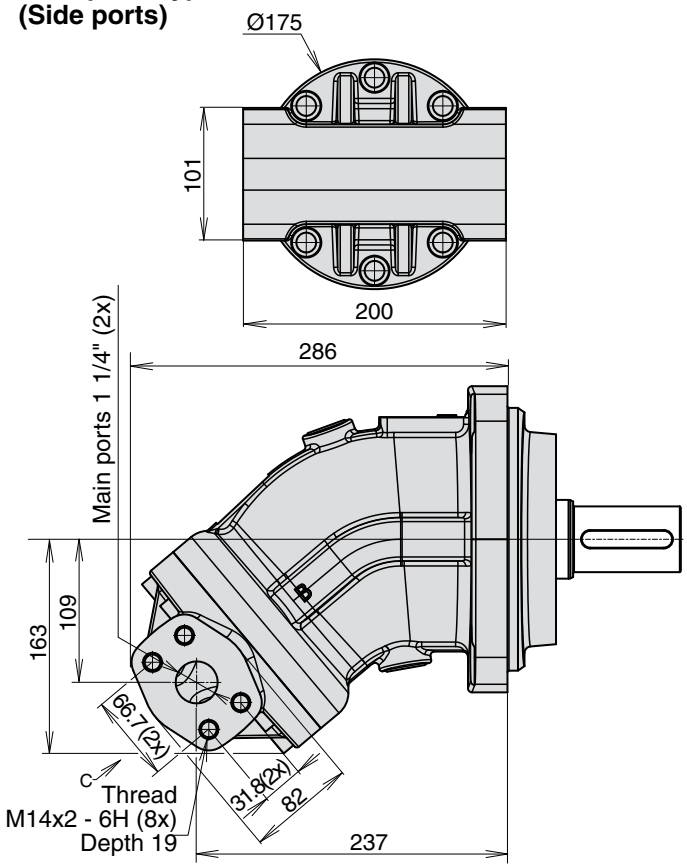


3

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden


F12-30, -40, -60, -80, -90, -110 and -125

(Cartridge versions)

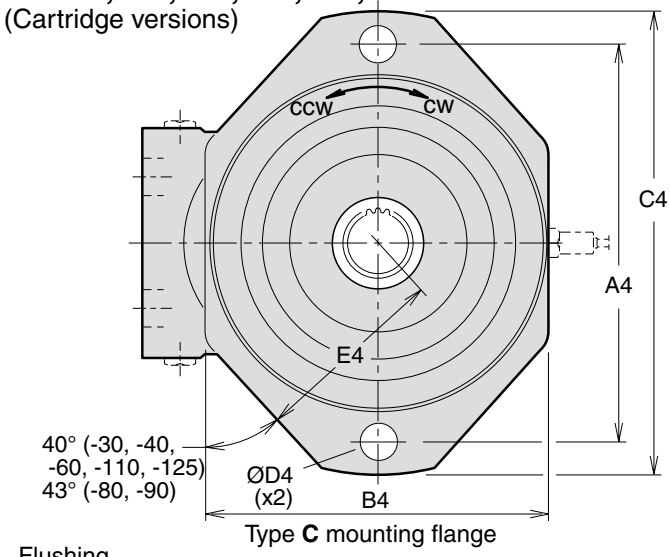


Type **C** mounting flange


F12-80 shown

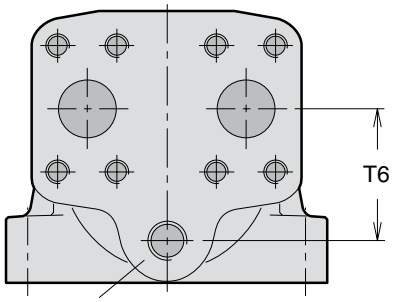


Port **E** (third drain port)
F12-110 and -125 barrel housing
(ISO /cartridge version)

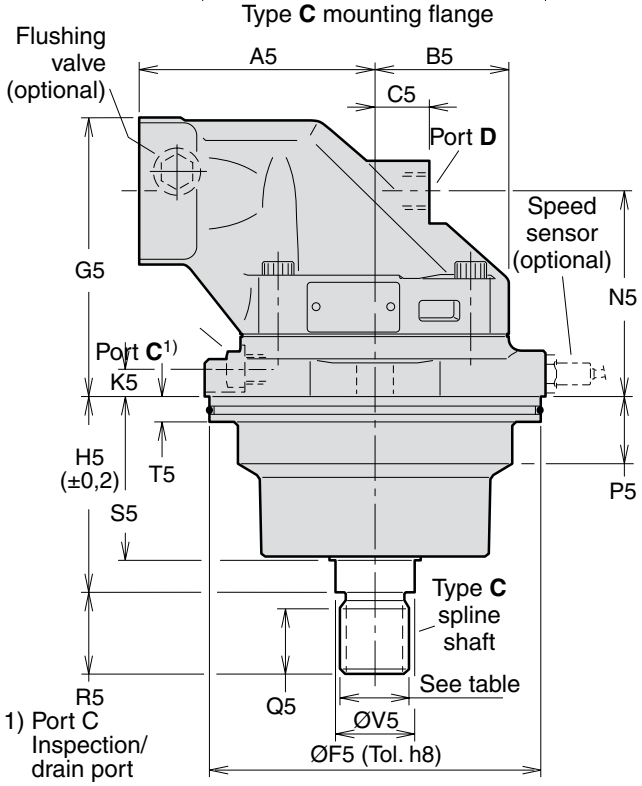


1) Port C
Inspection/
drain port

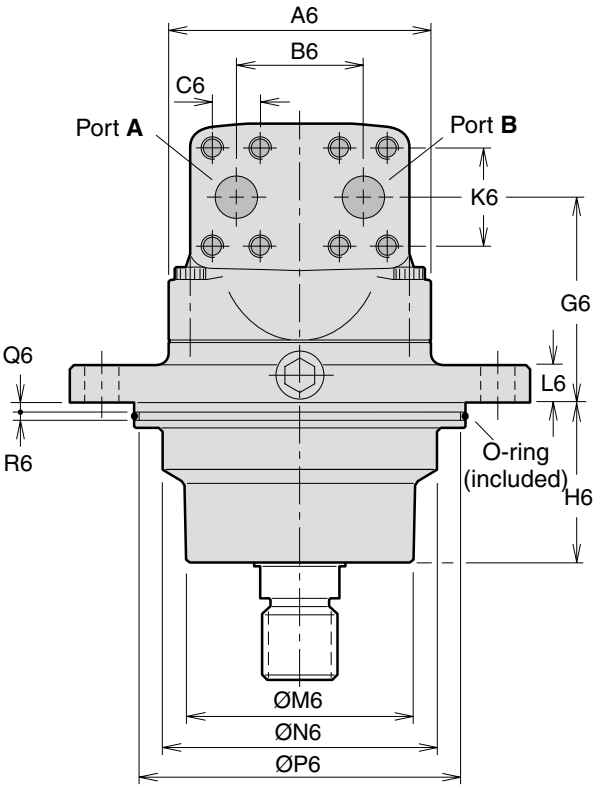

Shaft option K (J)




Shaft option V (F12-30)




Tapered key shaft "**V**"
SAE J744 32-3 (C)

Shaft option V (F12-40)



Tapered key shaft "**V**"
SAE J744 38-3 (C-C)

Shaft option V (F12-60)

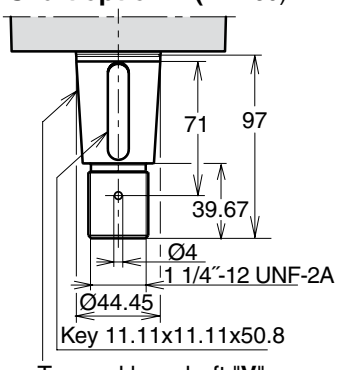

Tapered key shaft "**V**"
SAE J744 44-3 (D&E)

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

Dim.	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A4	160	200	200	224	250
B4	140	164	164	196	206
C4	188	235	235	260	286
D4	14	18	18	22	22
E4	77	95	95	110	116
A5	100	110	125	135	145
B5	59	65	70	77.5	85
C5	25	26	22	32	38
D5	8	8[1)] 10[2)]	10	12	14
E5	30	30[1)] 35[2)]	35	40	45
F5	135	160	160	190	200
G5	127	133	146	157	175
H5	89	92.3	92.3	110.5	122.8
J5	50	60	60	70	82
K5	14	16	15	15	15
L5	40	50	50	56	70
M5	5	5	5	7	6
N5	91	97	110	114	123
P5	22	30	31	40	40
Q5	28	28	28	37	37
R5	35	35	35	45	45
S5	70.5	72	76	91	95.7
T5	15	15	15	15	15
V5	32	35	35	45	45
A6	122	134	144	155	170
B6	66	66	66	75	83
C6	23.8	23.8	23.8	27.8	31.8
G6	91.5	97	110	114	123
H6	69.5	71	74	89.5	93.7
K6	50.8	50.8	50.8	57.2	66.7
L6	16	18	18	20	20
M6	92	115	115	130	140
N6	110	127	135	154	160
P6	128.2	153.2	153.2	183.2	193.2
Q6	5	5	5	5	5
R6	5	5	5	5	5
T6	-	-	-	-	68

1) Key shaft type **K**
2) Key shaft type **J** (opt.).

Ports	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A, B size	$^3/_4$"	$^3/_4$"	$^3/_4$"	1"	$1^1/_4$"
Screw thread	M10 x20	M10 x20	M10 x20	M12 x22	M14 x26
C thread	M14 x1.5	M14 x1.5	M14 x1.5	M14 x1.5	M14 x1.5
D, E thread	M18 x1.5	M18 x1.5	M22 x1.5	M22 x1.5	M22 x1.5

A, B: ISO 6162

3

Spline shaft (DIN 5480)

	Type **C** (standard)	Type **B** (optional)
F12-30	W30x2x14x9g	-
-40	W30x2x14x9g	-
-60	W30x2x14x9g	W35x2x16x9g
-80	W40x2x18x9g	-
-90	W40x2x18x9g	-
-110	W40x2x18x9g	W45x2x21x9g
-125	W40x2x18x9g	W45x2x21x9g

Key shaft


	Type **K** (std)	Type **J** (opt.)	Type **V** (opt.)
F12-30	Ø30	-	32-3
-40	Ø30	Ø35	38-3
-60	Ø35	-	44-3
-80	Ø40	-	-
-90	Ø40	-	-
-110	Ø45	-	44-3
-125	Ø45	-	44-3

O-ring dimensions	
F12-30	127x4
-40	150x4
-60	150x4
-80	180x4
-90	180x4
-110	190x4
-125	190x4


Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

F12-30, -40, -60, -80, -90, -110 and -125


(SAE versions with 4 bolt flange)

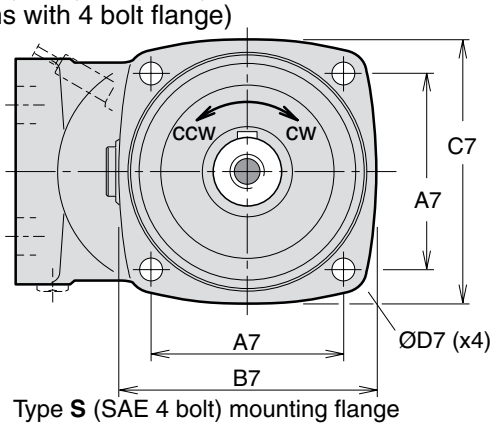


Type **S** (SAE 4 bolt) mounting flange

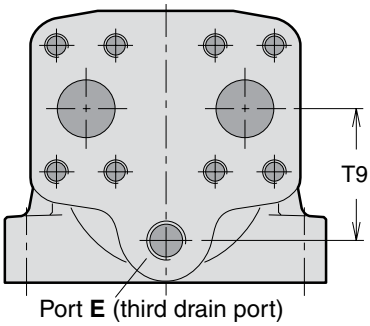


Port **E** (third drain port)
F12-110 and -125 barrel housing
(SAE version)

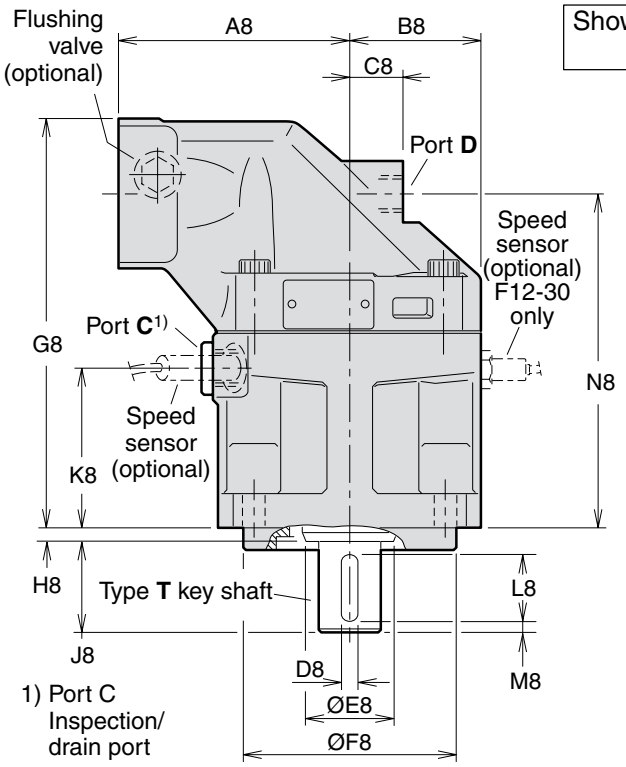


Shown: F12-80 with 4 bolt flange

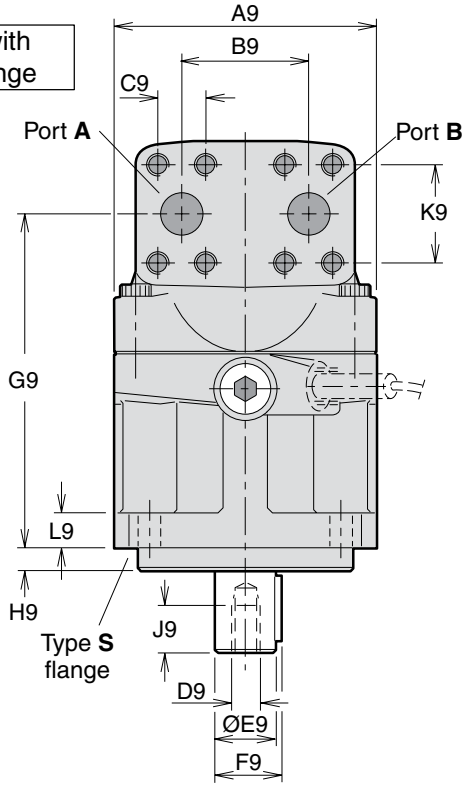

Shaft option S (U)




Shaft option V (F12-30)




Tapered key shaft "**V**"
SAE J744 32-3 (C)

Shaft option V (F12-40)

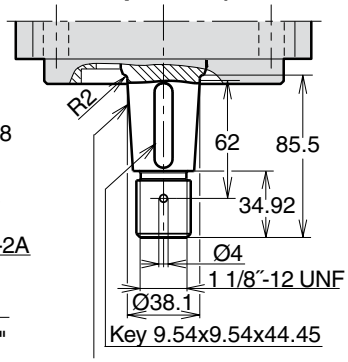

Tapered key shaft "**V**"
SAE J744 38-3 (C-C)

Shaft option V (F12-60)

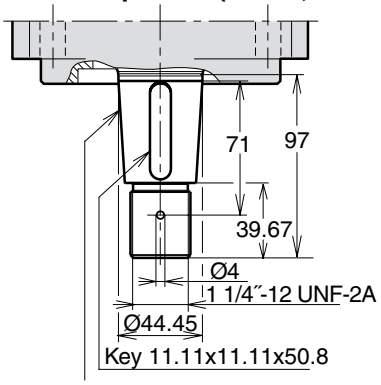

Tapered key shaft "**V**"
SAE J744 44-3 (D&E)

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

Dim.	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A7	89.8	114.5	114.5	114.5	161.6
B7	118	148	148	155	204
C7	118	144	144	155	200
D7	14	14	14	14	21
A8	100	110	125	135	145
B8	59	65	70	77.5	85
C8	25	26	22	32	38
D8	6.35	7.94	7.94	9.53	11.1
E8	33	42	42	52	57.5
F8	101.60/ 101.55	127.00/ 126.94	127.00/ 126.94	127.00/ 126.94	152.40/ 152.34
G8	189.5	197	214	240	264
H8	8	8	8	8	8
J8	38	48	48	54	67
K8	72	76	79	95	99
L8	31.8	38.1	38.1	44.5	54.1
M8	2.5	4	4	4	7.5
N8	153.5	161	178.3	197.1	212
Q8[1)]	26	27	27	29	39
Q8[2)]	-	-	-	23	-
R8[1)]	33	48	48	54	66.7
R8[2)]	-	-	-	48	-
A9	122	134	144	155	170
B9	66	66	66	75	83
C9	23.8	23.8	23.8	27.8	31.8
D9*	5/16"-24	3/8"-24	3/8"-24	1/2"-20	5/8"-18
E9	25.40/ 25.35	31.75/ 31.70	31.75/ 31.70	38.10/ 38.5	44.45/ 44.40
F9	28.2	35.3	35.3	42.3	49.4
G9	153.8	161	178.3	197.1	212
H9	9.7	12.7	12.7	12.7	12.7
J9	16	19	19	26	32
K9	50.8	50.8	50.8	57.2	66.7
L9	18	20	20	20	22
T9	-	-	-	-	68

* UNF-2B thread
1)Spline shaft type **S**
2)Spline shaft type **U**
3)Max operating pressure 350 bar

Ports	F12-30	F12-40	F12-60	F12-80 F12-90	F12-110 F12-125
A, B size	3/4"	3/4"	3/4"	1"	1 1/4"
Screw thread**)	3/8"-16 x22	3/8"-16 x20	3/8"-16 x22	7/16"-14 x27	1/2"-13 x25
C thread	7/8"-14	7/8"-14	7/8"-14	7/8"-14	1 1/16"-12
D thread	3/4"-16	3/4"-16	7/8"-14	7/8"-14	1 1/16"-12
E thread	-	-	-	-	1 1/16"-12

A, B: ISO 6162 C, D, E: O-ring boss (SAE J514)
**) UN thread x depth in mm.

Mounting flange (SAE J744)

	S (standard)	**R** (optional)
F12-30	SAE 'B', 4 bolt	-
-40	SAE 'C', 4 bolt	-
-60	SAE 'C', 4 bolt	-
-80	SAE 'C', 4 bolt	SAE 'D', 4 bolt
-90	SAE 'C', 4 bolt	SAE 'D', 4 bolt
-110	SAE 'D', 4 bolt	-
-125	SAE 'D', 4 bolt	-

Spline shaft (SAE J498b, class 1, flat root, side fit)

	S (standard)	**U** (opt.)	**F** (optional)
F12-30	SAE 'B' 13T, 16/32 DP	-	-
-40	SAE 'C' 14T, 12/24 DP	-	-
-60	SAE 'C' 14T, 12/24 DP	-	-
-80	SAE 'C-C' 17T, 12/24 DP	SAE 'C' 14T,12/24DP[3)]	SAE 'D' 13T, 8/16 DP
-90	SAE 'C-C' 17T, 12/24 DP	SAE 'C' 14T,12/24DP[3)]	SAE 'D' 13T, 8/16 DP
-110	SAE 'D' 13T, 8/16 DP	-	-
-125	SAE 'D' 13T, 8/16 DP	-	-


Main ports A and B, type U (optional)


F12-30	1 1/16" - 12 UN[3)]
F12-40	1 5/16" - 12 UN[3)]
F12-60	1 5/16" - 12 UN[3)]
F12-80	1 5/16" - 12 UN[3)]
F12-90	1 5/16" - 12 UN[3)]
F12-110	1 5/8" - 12 UN[3)]
F12-125	1 5/8" - 12 UN[3)]


Key shaft (SAE J744)

F12	**T** (standard)	**R** (optional)	**V** (optional)
-30	SAE 'B-B' (Ø25.4 mm/1")	-	32-3
-40	SAE 'C' (Ø31.75 mm/1 1/4")	-	38-3
-60	SAE 'C' (Ø31.75 mm/1 1/4")	-	44-3
-80	SAE 'C-C' (Ø38.1 mm/1 1/2")	SAE 'D' (Ø44.45 mm/1 3/4")	-
-90	SAE 'C-C' (Ø38.1 mm/1 1/2")	SAE 'D' (Ø44.45 mm/1 3/4")	-
-110	SAE 'D' (Ø44.45 mm/1 3/4")	-	44-3
-125	SAE 'D' (Ø44.45 mm/1 3/4")	-	44-3


F12-152, -162 and -182
(SAE versions)

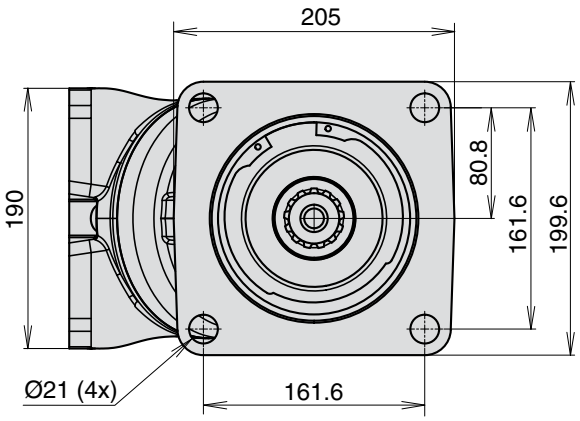

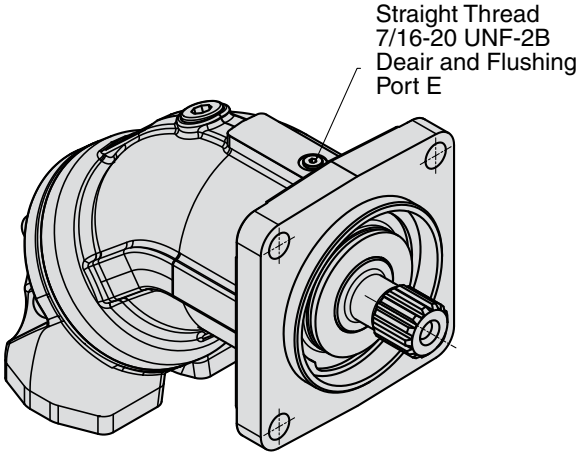


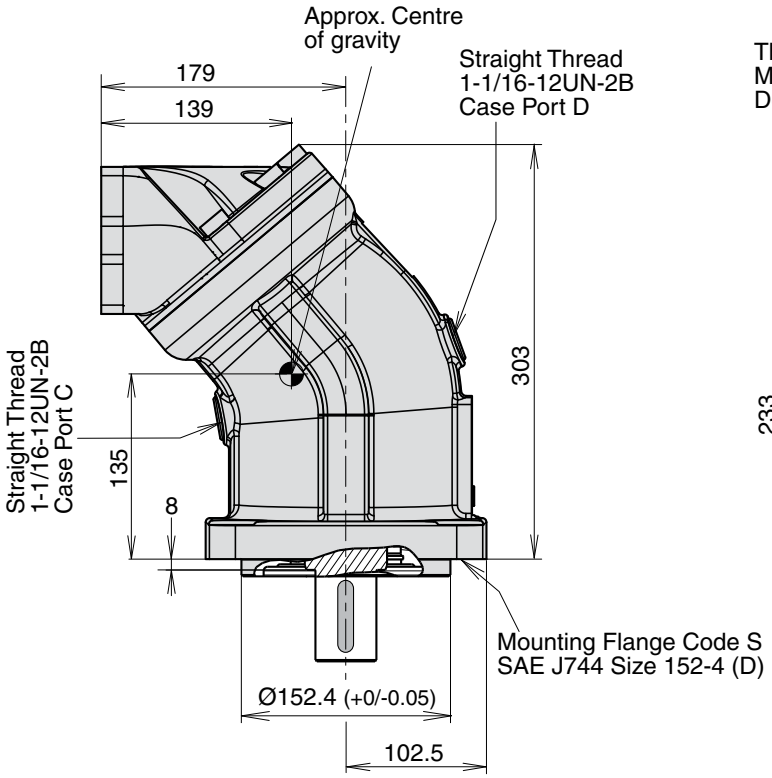


Main ports type F
(90 deg Vertical)

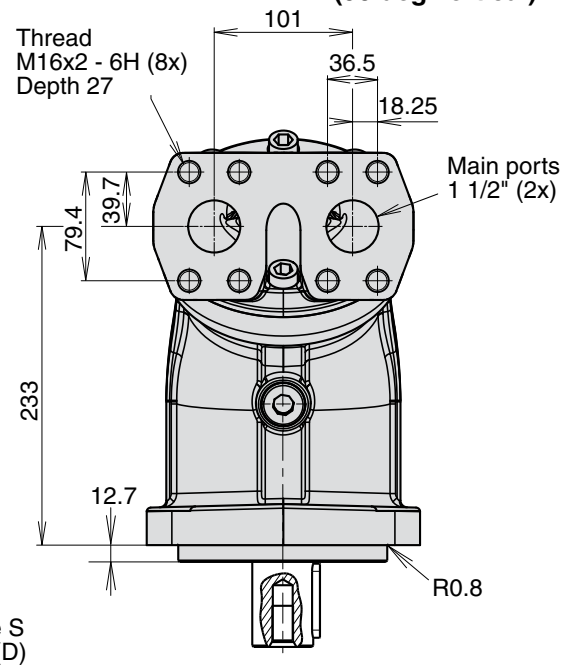


Shaft option T

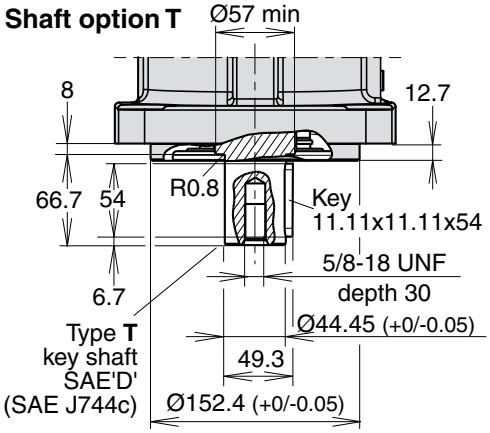

Shaft option S

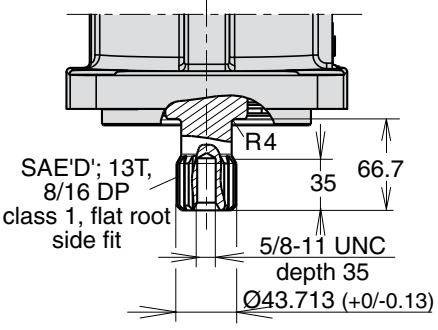


Shaft option F

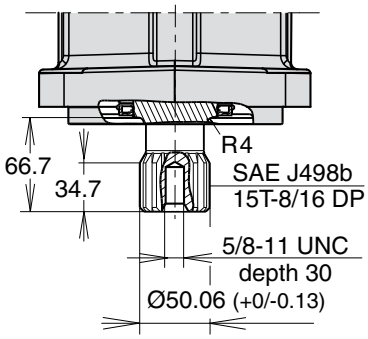


Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

F12-152, -162 and -182
(SAE versions)


Main ports type A (180 deg Vertical)

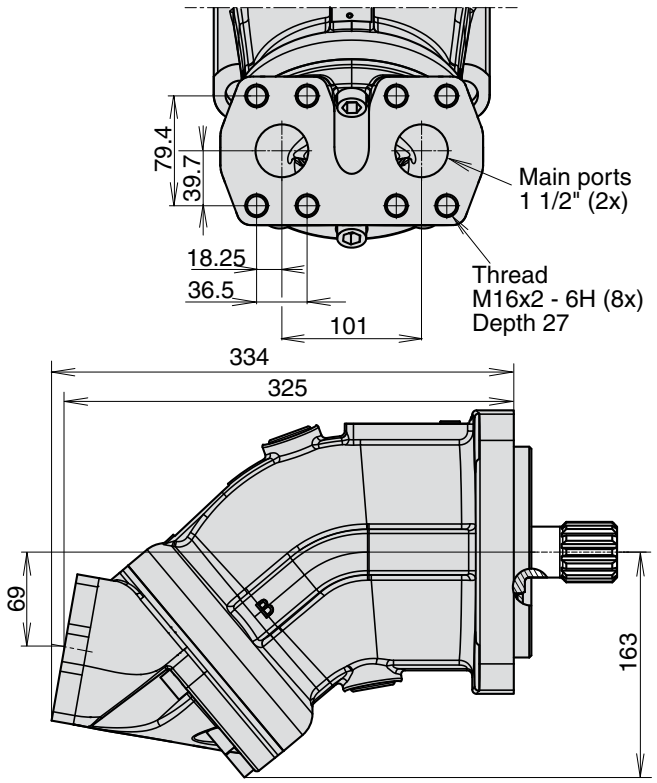


Main ports type D (90 deg Horizontal)

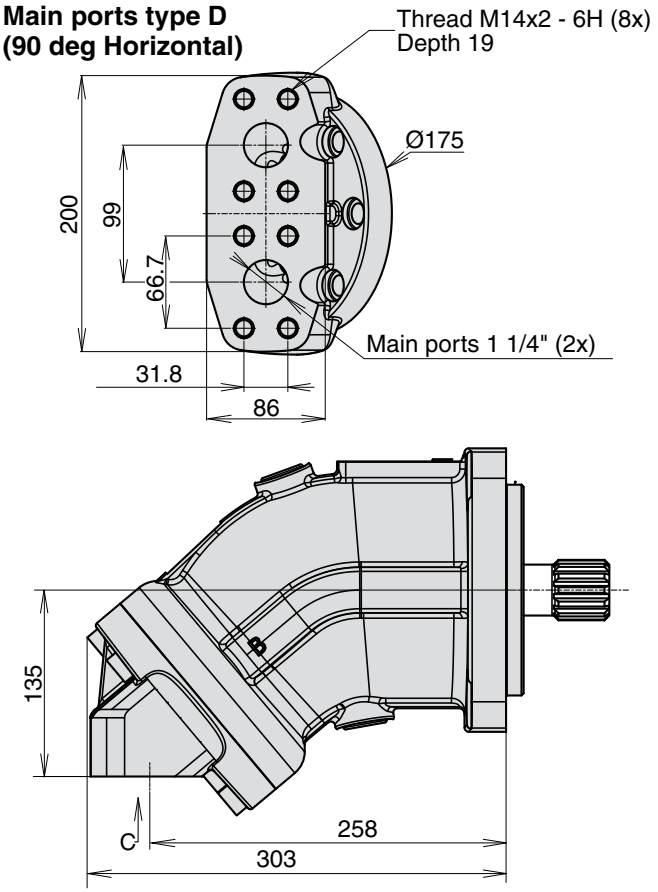

Main ports type K (40 deg rear)

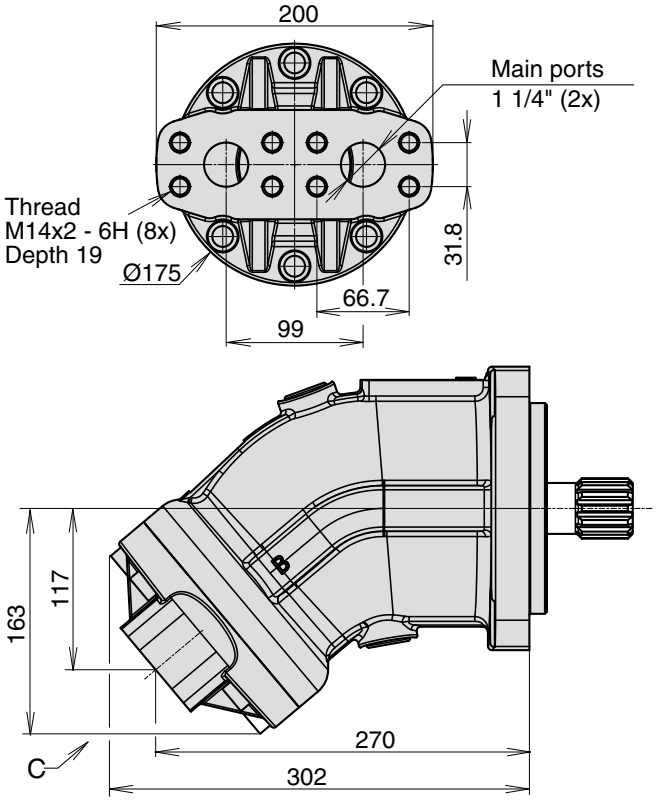


Main ports type M (Side ports)

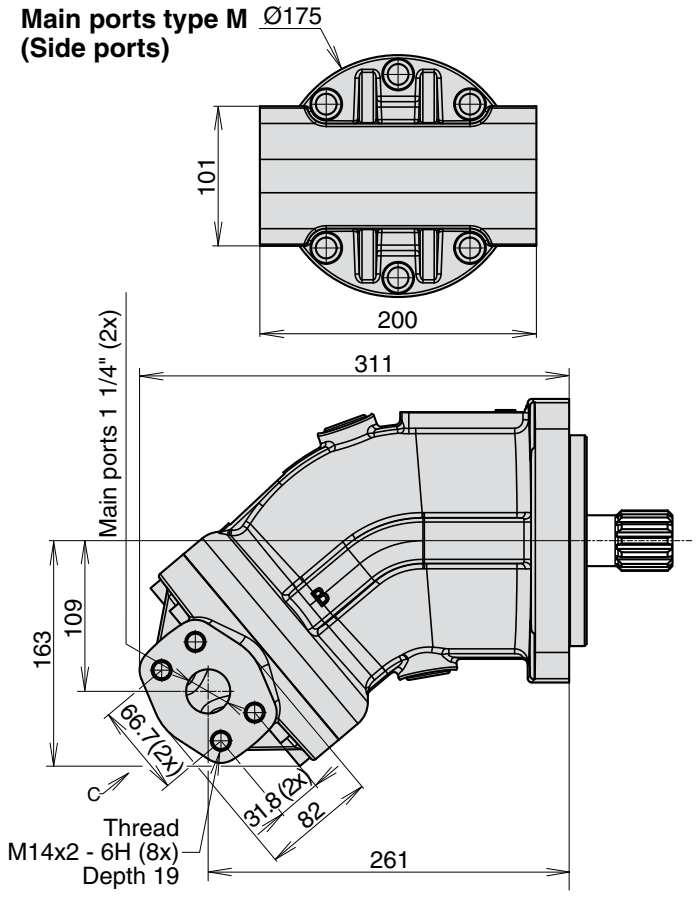

3


Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden


F12-250
(SAE version)

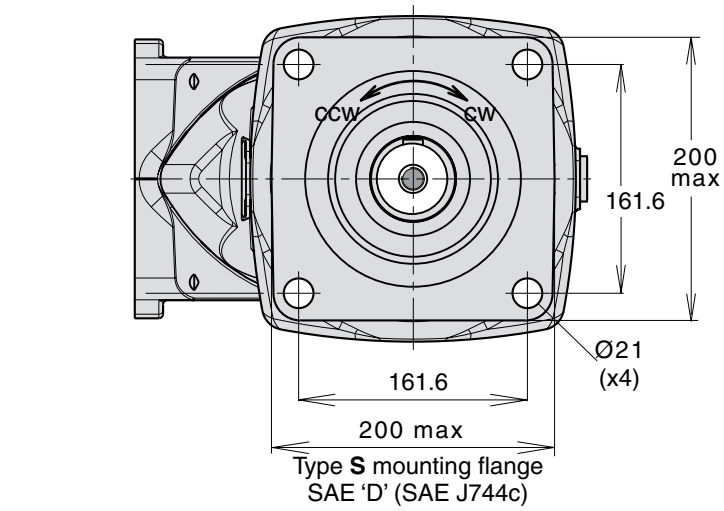


Type **S** mounting flange
SAE 'D' (SAE J744c)

***** 6000 psi flange (SAE J518c)

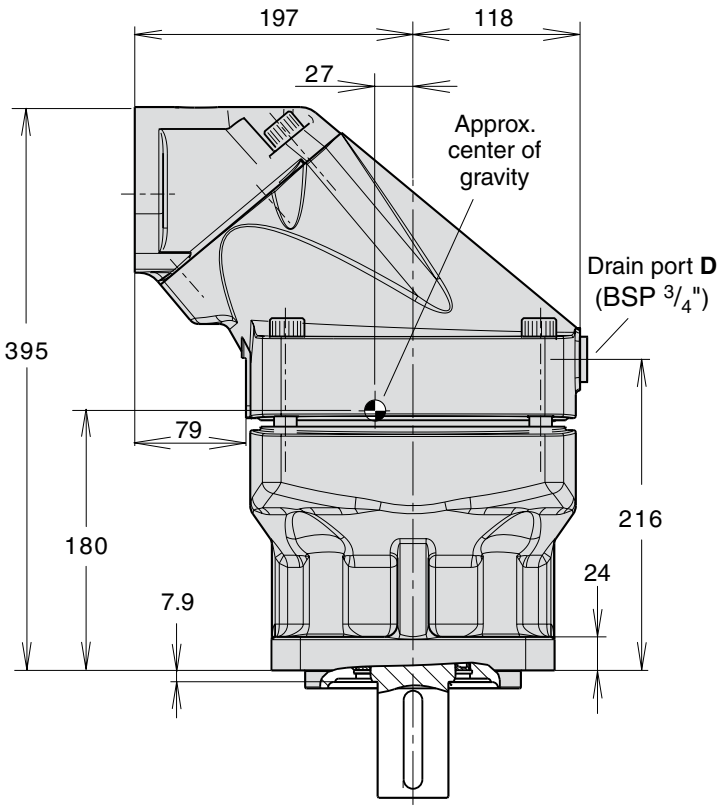

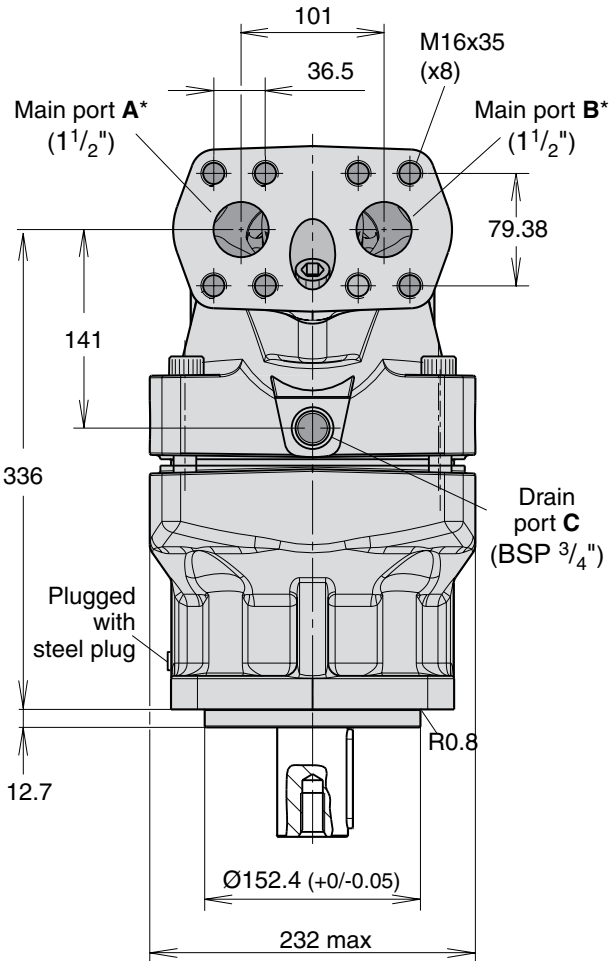


F12-250 Options (SAE version)

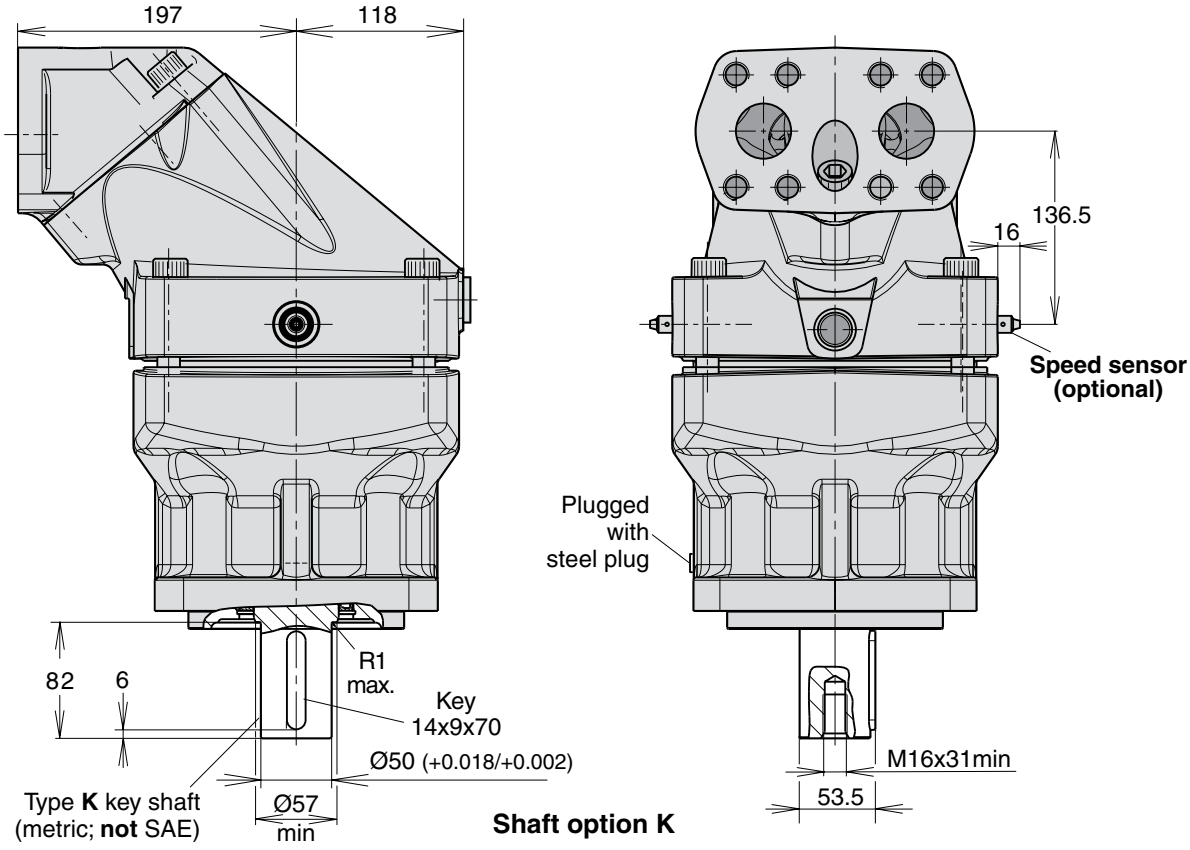


Shaft option K

Shaft option T

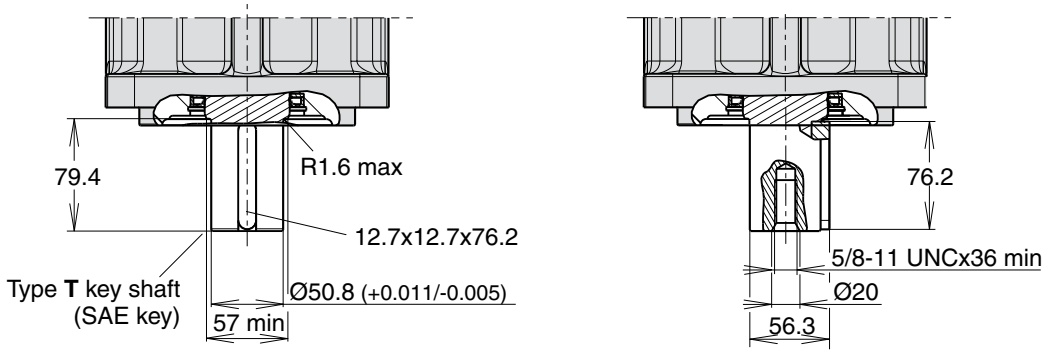


Shaft option D

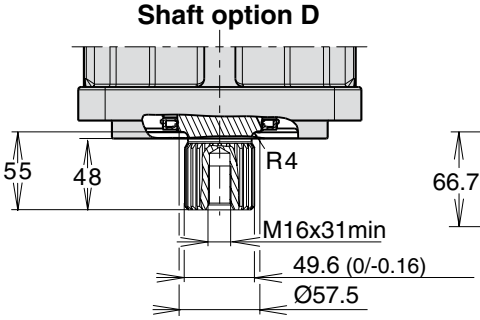


Type **D** spline shaft
W50x2x24x9g
DIN 5480 side fit

Shaft option F

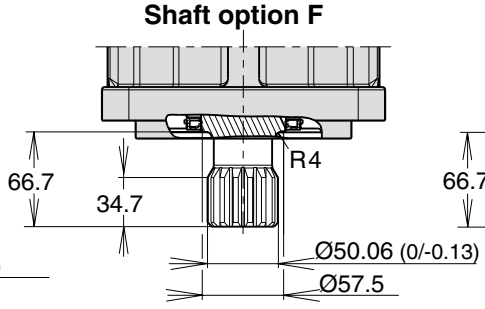

Type **F** spline shaft
SAE J498b, class 1;
15T-8/16 DP;
fillet root, side fit


Shaft option S

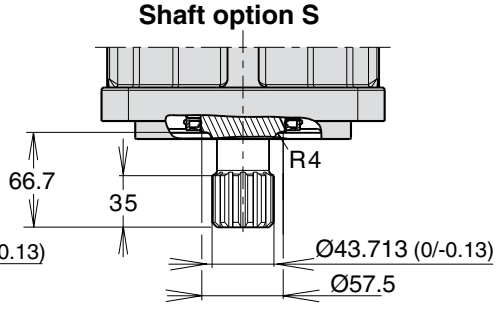

Type **S** spline shaft
SAE J498b, class 1;
30° involute spline;
13T-8/16 DP;
flat root, side fit


F12-30, -40, and -60


(SAE versions with 2 bolt flange)

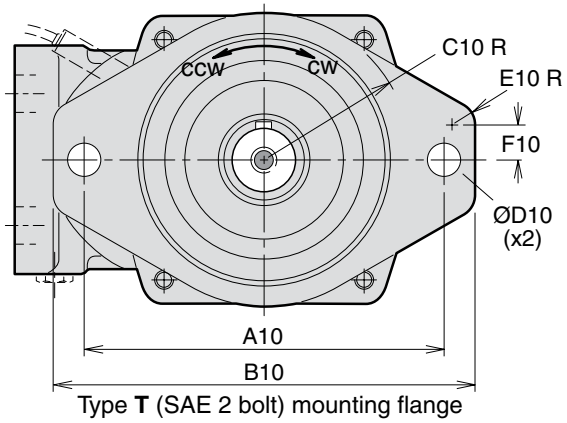


Type **T** (SAE 2 bolt) mounting flange

Shown: F12-60 with 2 bolt flange

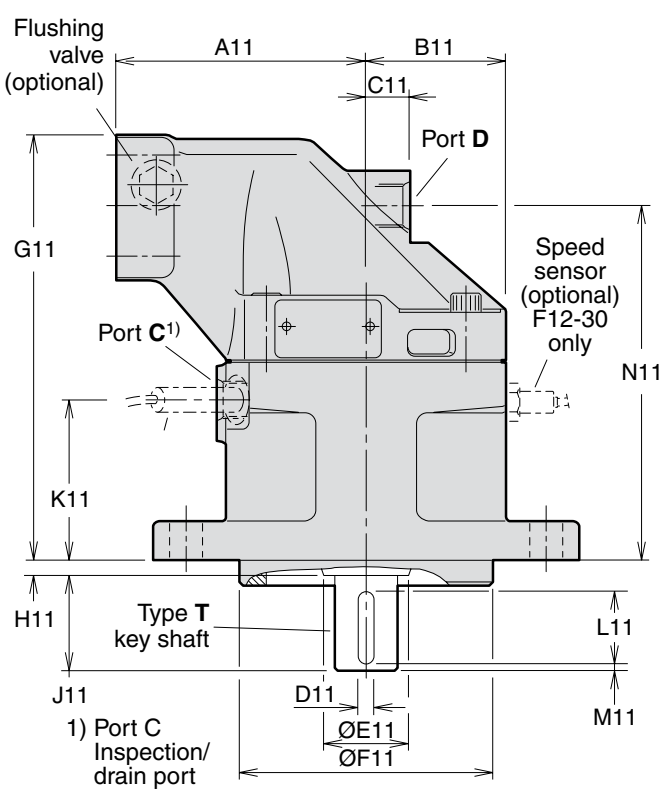


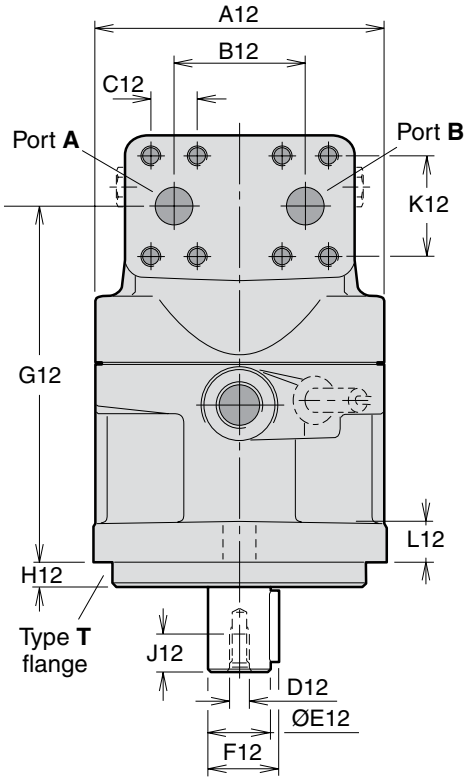

Shaft option S

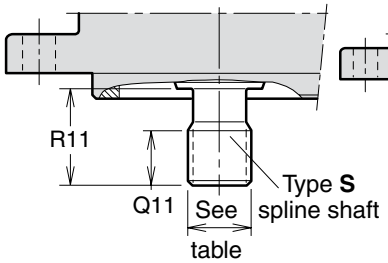


Shaft option V (F12-30)




Tapered key shaft "**V**"
SAE J744 32-3 (C)

Shaft option V (F12-40)

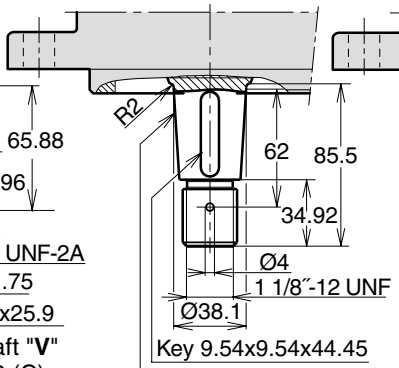

Tapered key shaft "**V**"
SAE J744 38-3 (C-C)

Shaft option V (F12-60)

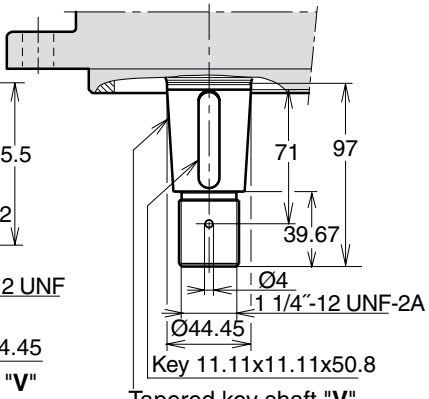

Tapered key shaft "**V**"
SAE J744 44-3 (D&E)

Parker Hannifin
Pump & Motor Division Europe
Trollhättan, Sweden

Dim.	F12-30	F12-40	F12-60
A10	146	181	181
B10	176	215	215
C10	63	74	74
D10	14.4	17.5	17.5
E10	10	16	16
F10	10	15.5	15.5
A11	100	110	125
B11	59	65	70
C11	25	26	22
D11	6.35	7.94	7.94
E11	33	42	42
F11	101.60/ 101.55	127.00/ 126.95	127.00/ 126.95
G11	189.5	197	214
H11	8	8	8
J11	38	48	48
K11	71	77	81.5
L11	31.8	38.1	38.1
M11	2.5	4	4
N11	154	161	178.5
Q11	26	27	27
R11	33	48	48
A12	122	134	144
B12	66	66	66
C12	23.8	23.8	23.8
D12[1)]	5/16"-24	3/8"-24	3/8"-24
E12	25.40/ 25.35	31.75/ 31.70	31.75/ 31.70
F12	28.2	35.2	35.2
G12	154	161	178.5
H12	9.7	12.7	12.7
J12	16	19	19
K12	50.8	50.8	50.8
L12	18	20	20

1) UNF-2B thread

6) Max operating pressure 350 bar

Ports	F12-30	F12-40	F12-60
A, B size	19 (3/4")	19 (3/4")	19 (3/4")
Screw thread *)	3/8"-16 x22	3/8"-16 x20	3/8"-16 x22
C thread	3/4"-16	3/4"-16	7/8"-14
D thread	3/4"-16	3/4"-16	7/8"-14

A, B (main ports): SAE J518c (6000 psi)
C, D (drain ports): O-ring boss (SAE J514)
*) UN thread

Main ports A and B, type U (optional)	
F12-30	1 1/16" - 12 UN[6)]
-40	1 5/16" - 12 UN[6)]
-60	1 5/16" - 12 UN[6)]

O-ring ports according to SAE J514d

Mounting flange T (SAE J744)	
F12-30	SAE 'B', 2 bolt
-40	SAE 'C', 2 bolt
-60	SAE 'C', 2 bolt

Spline shaft S (SAE J498b, class 1, flat root, side fit)	
F12-30	SAE 'B' 13 T; 16/32 DP
-40	SAE 'C' 14 T; 12/24 DP
-60	SAE 'C' 14 T; 12/24 DP

Key shaft (SAE J744)

	T (Standard)	**V** (optional)
F12-30	SAE 'B-B' Ø25.4 mm/1"	32-3
-40	SAE 'C' Ø31.75 mm/1 1/4"	38-3
-60	SAE 'C' Ø31.75 mm/1 1/4"	44-3