
DESCRIPTION


✔ Check valves for pipe mounting-KO-...
✔ Check valves give leak free closure in one direction and allow free flow in the other.

DIMENSIONS

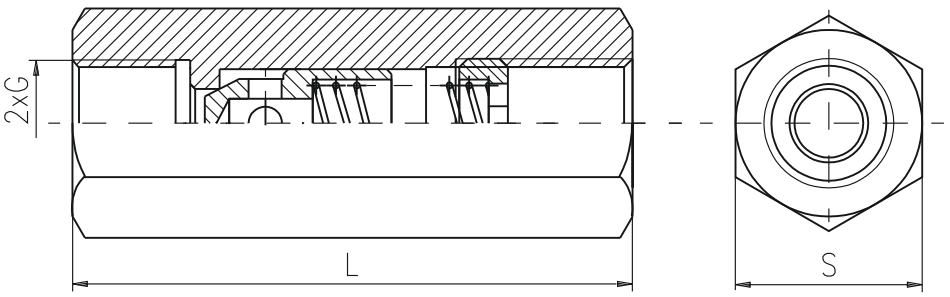

G	1/8	1/4	3/8	1/2	3/4	1
L(mm)	38	56	65	68	80	100
S(mm)	14	19	24	27	36	46

SYMBOL



KO-...

ORDERING CODE

KO - *** - ***

Check valve
Mounting thread: G1/8 -**1/8**
G1/4 -**1/4**
G3/8 -**3/8**
G1/2 -**1/2**
G3/4 -**3/4**
G1 -**1**
Cracking pressure - (bar.) see table below*

*Other options on request

TECHNICAL DATA

Max. Pressure		320 bar
Rated flow (Δp=5 bar.)	-1/8	10 l/min
	-1/4	20 l/min
	-3/8	40 l/min
	-1/2	60 l/min
	-3/4	90 l/min
	-1	120 l/min
Cracking pressure	-1/8	1 bar
	-1/4	0,5 bar
	-3/8	0,5 bar
	-1/2	0,5 bar
	-3/4	0,4 bar
	-1	1,2 bar
Working liquid-hydraulic oils with characteristics:		
-viscosity		10...400 cSt
-degree of filtration		0,025 mm
-temperature		-20...+80°C