

BV3PNA SERİSİ ÇİFT ETKİLİ PNÖMATİK AKTÜATÖRLÜ HİDROLİK 3 YOLLU PASLANMAZ KÜRESEL VANALAR (SU VE KİMYASAL AKIŞKAN GEÇİŞİ İÇİN ÖZEL)



BV3PNA Serisi Çift Etkili Pnömatik Aktüatörlü Hidrolik 3 Yollu Paslanmaz Küresel Vanalar (Su ve kimyasal akışkan geçişi içiz özel) akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV3PNA Serisi Çift Etkili Pnömatik Aktüatörlü Hidrolik 3 Yollu Paslanmaz Küresel Vanalar(Su ve kimyasal akışkan geçişi içiz özel) içteki küre çelik olup, sert kromla kaplanmış ve delrinle (POM) yataklandırılmıştır. BV3PNA Serisi Çift Etkili Pnömatik Aktüatörlü Hidrolik 3 Yollu Paslanmaz Küresel Vanalar(Su ve kimyasal akışkan geçişi içiz özel) hidrolik ve diğer sanayi yağlarının yanı sıra akaryakıt, LPG, CNG ve diğer gaz geçişlerinde de kullanılırlar. BV3PNA Serisi Çift Etkili Pnömatik Aktüatörlü Hidrolik 3 Yollu Paslanmaz Küresel Vanalar, vana kolu yardımı ile yapılan hareketlerin pnömatik aktüatörlü vasıtasıyla yapılmasını sağlar.

Gövde Malzemesi	AISI 316-L Paslanmaz Çelik
Küre Malzemesi	AISI 316-L Paslanmaz Çelik
Vida Ölçüsü	BSP, NPT
Küre Yataklaması	Delrin (POM)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Özel Hallerde	VİTON (-30 °C - +225 °C)
Kullanım Alanı	Kazı makineleri, plastik baskı kalıp makineleri, kimyasal üretim tesisleri, vinçler, kamyonlar ve genel hidrolik uygulamalar.

BV3PNA SERIES DOUBLE ACTING PNEUMATIC ACTUATOR HYDRAULIC 3-WAY STAINLESS STEEL BALL VALVES (SPECIAL FOR WATER AND CHEMICAL FLUID FLOW)




BV3PNA Series Double Acting Pneumatic Actuator Hydraulic 3-Way Stainless Steel Ball Valves (Special for water and chemical fluid flow) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.
BV3PNA Series Double Acting Pneumatic Actuator Hydraulic 3-Way Stainless Steel Ball Valves (Special for water and chemical fluid flow) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated steel and delrin (POM) seated. Ball Valves are suitable for LPG, CNG and other gas applications, as well as hydraulic and other industrial fluids. BV3PNA Series Double Acting Pneumatic Actuator Hydraulic 3-Way Stainless Steel Ball Valves (Special for water and chemical fluid flow) provides the movement with pneumatic actuator instead of handle motion

Body Material	Stainless Steel (AISI 316-L)
Ball Material	Stainless Steel (AISI 316-L)
Thread Size	BSP, NPT
Ball Seats	Delrin (POM)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Upon Request	VITON (-30 °C - +225 °C)
Applications	Excavators, plastic injection mould machines, chemical processing plants, cranes, tankers, dump trucks and general hydraulic applications






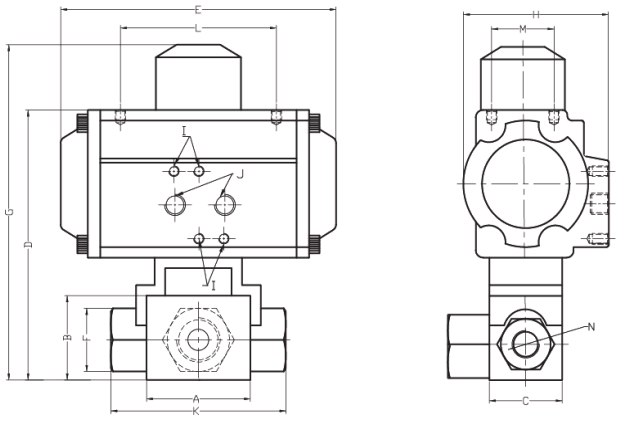

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size)	Aktüatör Tipi (Actuator Type)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm													
				A	B	C	D	E	F	G	H	I	J	K	L	M	N
BV3PNASSWU(L)(T)G14N	1/4"BSP	RA40	500	45	35	35	123	139	24	155	70	M 5	1/8"BSP	75	80	30	DN 10
BV3PNASSWU(L)(T)G38N	3/8"BSP	RA40	500	45	35	35	123	139	24	155	70	M 5	1/8"BSP	75	80	30	DN 10
BV3PNASSWU(L)(T)G12N	1/2"BSP	RA60	500	50	40	40	143	178	30	175	82	M 5	1/8"BSP	84	80	30	DN 13
BV3PNASSWU(L)(T)G34N	3/4"BSP	RA80	400	60	55	55	197	242	38	230	110	M 5	1/8"BSP	96	80	30	DN 20
BV3PNASSWU(L)(T)G1N	1" BSP	RA80	400	70	60	60	202	242	46	233	110	M 5	1/8"BSP	118	80	30	DN 25
BV3PNASSWU(L)(T)G114N	1 1/4"BSP	RA80	380	70	60	60	202	242	50	233	110	M 5	1/8"BSP	134	80	30	DN 25
BV3PNASSWU(L)(T)G112N	1 1/2"BSP	RA80	380	70	60	60	202	242	55	233	110	M 5	1/8"BSP	140	80	30	DN 25

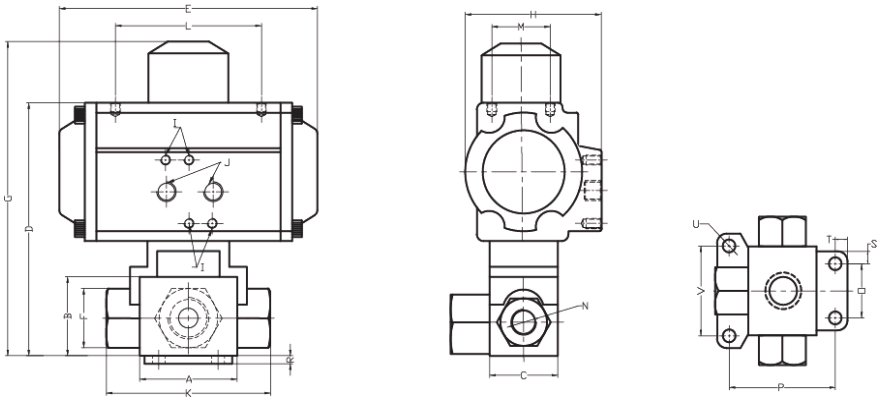

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size)	Aktüatör Tipi (Actuator Type)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm																				
				A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	R	S	T	U	V
BV3PNASSWU(L)(T)WG14N	1/4"BSP	RA40	500	45	35	30	123	139	24	155	70	M 5	1/8"BSP	75	80	30	DN 10	27,50	54,50	4	6,25	6,25	6,50	45,50
BV3PNASSWU(L)(T)WG38N	3/8"BSP	RA40	500	45	35	30	123	139	24	155	70	M 5	1/8"BSP	75	80	30	DN 10	27,50	54,50	4	6,25	6,25	6,50	45,50
BV3PNASSWU(L)(T)WG12N	1/2"BSP	RA60	500	50	40	35	143	178	30	175	82	M 5	1/8"BSP	84	80	30	DN 13	30,50	59,50	4	7,25	6,25	6,50	49,50
BV3PNASSWU(L)(T)WG34N	3/4"BSP	RA80	400	60	55	45	197	242	38	230	110	M 5	1/8"BSP	96	80	30	DN 20	40,50	72,50	4	7,25	7,25	9	60,50
BV3PNASSWU(L)(T)WG1N	1" BSP	RA80	400	70	60	55	202	242	46	233	110	M 5	1/8"BSP	118	80	30	DN 25	50,50	85,50	4	7,25	7,25	9	70,50
BV3PNASSWU(L)(T)WG114N	1 1/4"BSP	RA80	380	70	60	55	202	242	50	233	110	M 5	1/8"BSP	134	80	30	DN 25	50,50	85,50	4	7,25	7,25	9	70,50
BV3PNASSWU(L)(T)WG112N	1 1/2"BSP	RA80	380	70	60	55	202	242	55	233	110	M 5	1/8"BSP	140	80	30	DN 25	50,50	85,50	4	7,25	7,25	9	70,50

Yüksek ısıya dayanıklı vitonlu ve teflonlu küresel vanalarımızda çalışma basınçları yukarıdaki değerlerden %35 düşüktür.

Working pressures of ball valves for high temperature with viton sealing and teflon are 35% lower than pressures above