


MPR SERİSİ NG10 MODÜLER BASINÇ EMNİYET VALFİ (ÇİFTLİ)



NG10 Modüler Basınç Emniyet Valfi hidrolik sistemlerde kontrol sisteminin bir parçası olarak rol oynarlar.
Sistem aşırı yüklendiğinde modüler basınç emniyet valfi açılarak pompadan gelen fazla hidrolik yağın doğrudan tanka yönlendirilmesini sağlar.
Sistemdeki basınç, NG10 Modüler Basınç Emniyet Valfi sayesinde belirlenen seviyede kalır.
NG10 Modüler Basınç Emniyet Valfleri, hidrolik devrelerdeki basıncı sınırlamak amacıyla kullanılırlar.

Malzeme	Alüminyum
Bağlantı Şekli	NG10 Bağlantılı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları

MPR SERIES NG10 MODULAR PRESSURE RELIEF VALVES (DOUBLE)

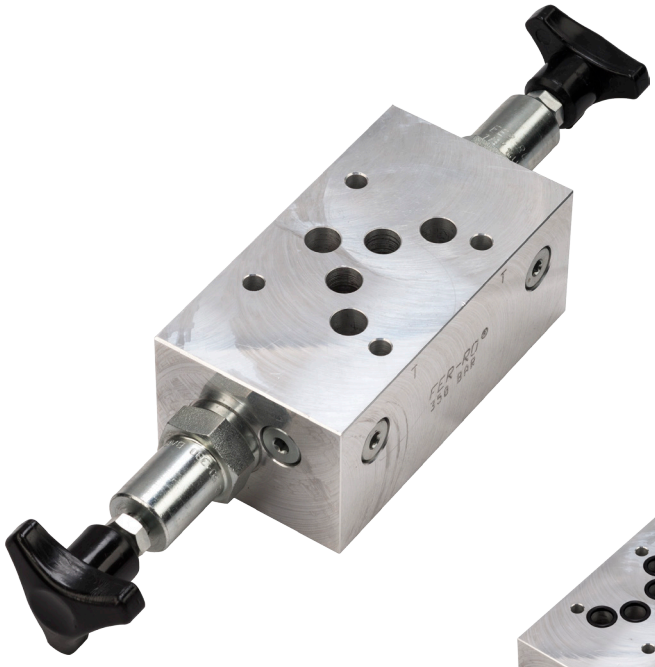

NG10 Modular Pressure Relıef Valves play a role in hydraulic systems as part of the control system.
When the system is overloaded, the modular pressure relief valve opens and allow to discharge of excess hydraulic oil from the pump to the tank.
The pressure in the system remains at the specified level with the support of the NG10 modular pressure relief valve.
NG10 Modular Pressure Relief Valves are used to limit pressure in hydraulic circuits.


Material	Aluminium
Connection Type	NG10 Connection
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications









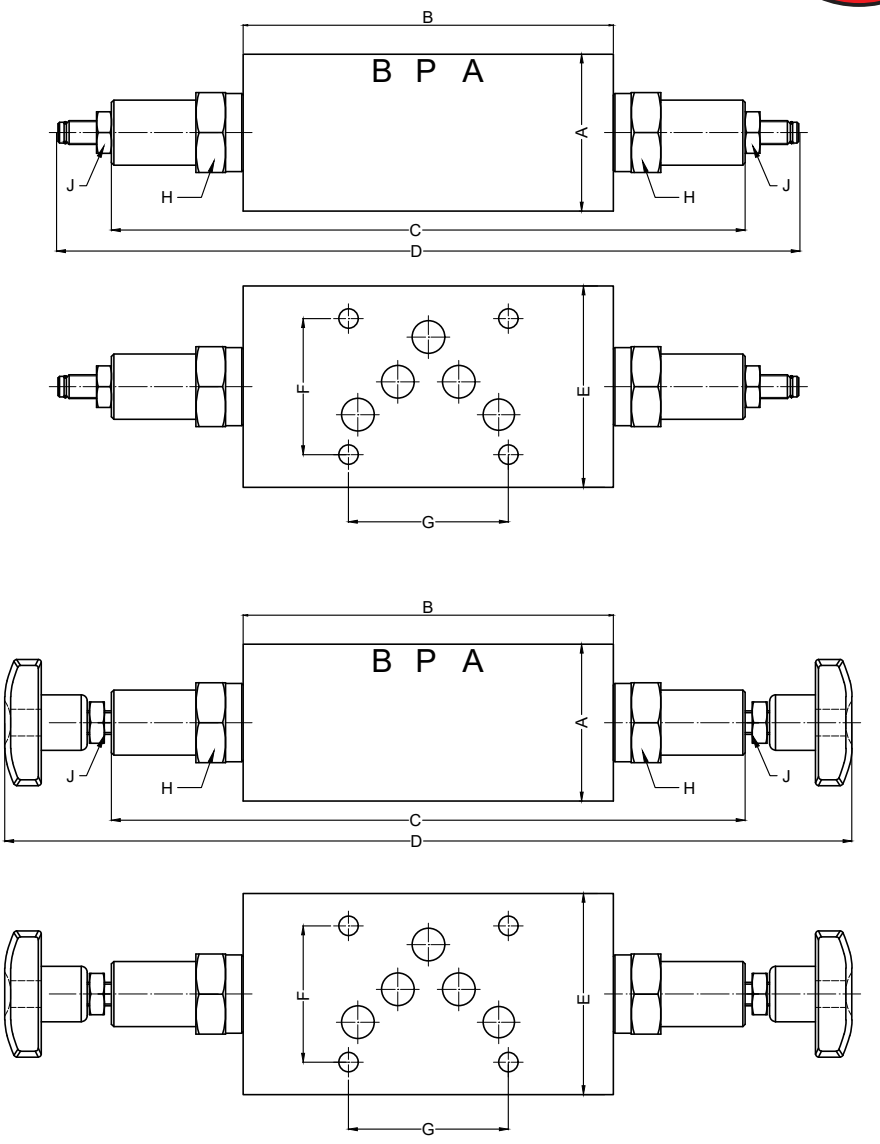

Teknik Özellikler
Technical Specifications

Kod (Code)	Bağlantı Ölçüsü (Connection Type)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Ölçüler - mm (Dimensions - mm)								
				A	B	C	D (Max)	E	F	G	H	J
MPRHPKNNG10N	NG10	50-380	80	53	125	215	301	68	46	64	AA27	AA13
MPRHPSHNG10N	NG10	50-380	80	53	125	215	255	68	46	64	AA27	AA13
MPRLPKNNG10N	NG10	0-150	80	53	125	215	301	68	46	64	AA27	AA13
MPRLPSHNG10N	NG10	0-150	80	53	125	215	255	68	46	64	AA27	AA13

