

3 HOLES UNI BI-DIRECTIONAL GEAR PUMP

3 DELİKLİ UNI ÇİFT YÖNLÜ DİŞLİ POMPA

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

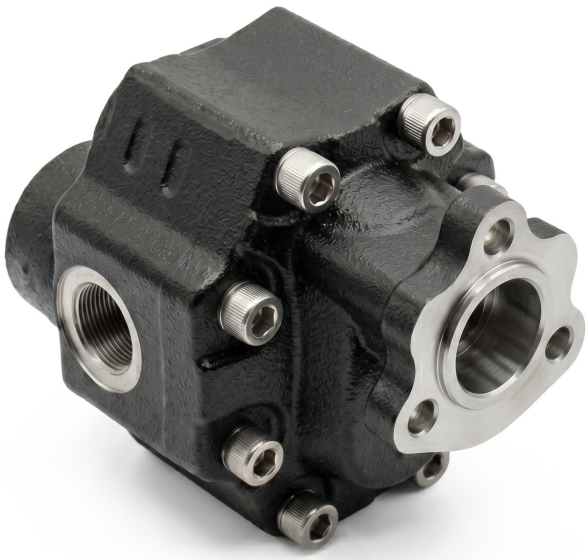

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100		Working temperature -15°C +100°C			
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

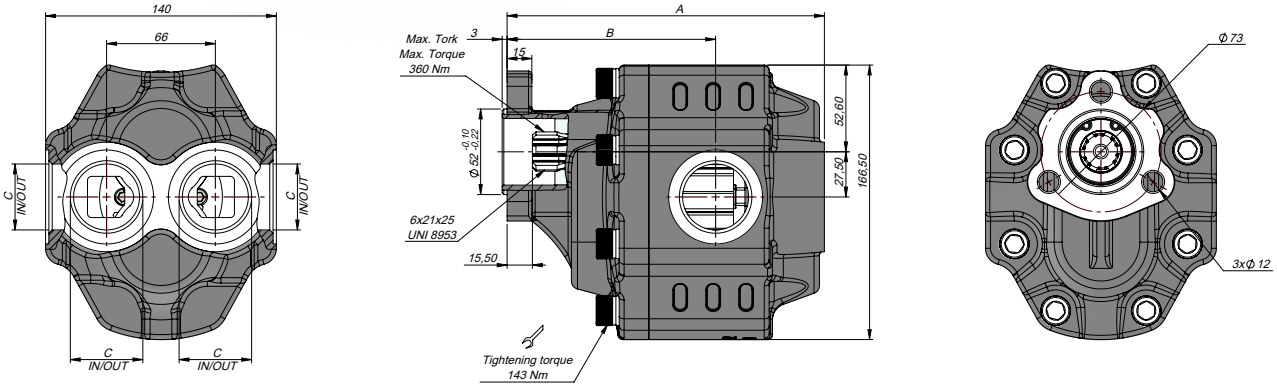

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G35060UF431	60	250	270	290	1800	2700	300	179.5	120.5	G1"	
G35073UF431	73	245	265	285				185.5	119.5		
G35082UF431	82	240	260	280				188.5	122.5		
G35090UF431	90	230	250	265				191.5	126.5	G1 1/4"	
G35100UF431	100	220	240	255				202.5	127		
G35110UF431	110	205	225	240				207.5	129		
G35120UF431	120	195	215	230	1500	2500		214	129		