
3/2 WAY DIRECT ACTING SOLENOID VALVE, FOR MANIFOLDING G 1/8"



normally closed

TYPE: B919/920/921



TECHNICAL SPECIFICATIONS

Media: water, oil, air	
Media temperature: -10°C ÷ +130°C	
Ambient temperature: -10°C ÷ +50°C	
Body material: brass (CW617N EN 12165)	
Orifice material: stainless steel (AISI 303 EN 10088-3)	
Operator material: stainless steel	
Seal material: FKM	
Coil power:	AC 10VA (holding)
	AC 16VA (inrush)
	DC 7W
Protection class: IP 65 (with connector)	
Standard manual override	

OPTIONS


- Normally open (Ex. code RB919CVC)
- Assembly plug with silicone O-RING code 883 026 000
- Version 2/2 ways w/o manual override (Ex. code B919DVC)
- Pre-assembled manifolds with max 4 valves will be delivered on request

OPTION 2/2 WAY



SELECTION TABLE

VALVE	G connection	Nominal Diameter	Flow rate kvs	OPD min	OPD max		COILS	
Code	[ISO 228]	[mm]	[l/min]	[bar]	AC [bar]	DC [bar]	Code	[Volts/Hz]
B919CVCM	1/8"	1.5	1.0	0	10	10	2250	24V DC
B920CVCM	1/8"	1.5	1.0	0	10	10	2200	24V 50/60Hz
B921CVCM	1/8"	1.5	1.0	0	10	10	2400	110V 50Hz - 120V 60Hz
							2600	200V 50Hz – 220V 60Hz
							2700	230V 50Hz – 240V 60Hz

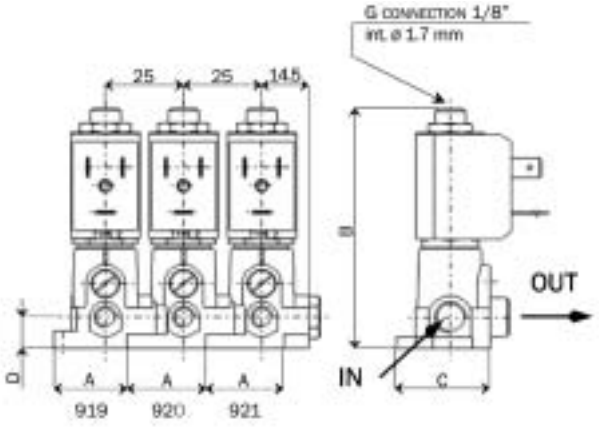

DIMENSIONS & WEIGHTS

G connection	A	B	C	D	weight
[ISO 228]	[mm]	[mm]	[mm]	[mm]	[Kg]
1/8"	26	76	34.5	9.5	0.18