

ROUND STEEL TANKS F & H SERIES



Recommended tightening torque for 3/8" BSPP: 10 Nm

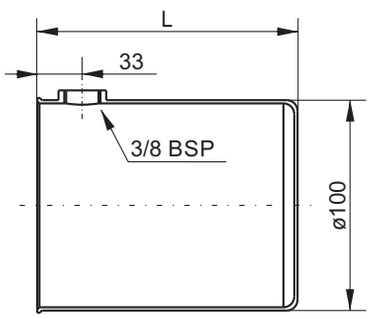


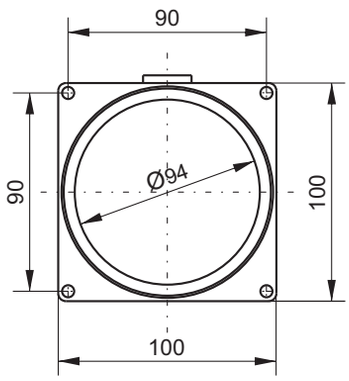


Description	Spare part code	Assembly code	L (mm)	Weight	Actual filling volume (lt)	
					Horizontal	Vertical
0,7 l cylindrical horizontal / vertical mounting	**E50403001**	**0,7F / 0,7FV**	120	0,26 Kg	0,75	0,52
1,2 l cylindrical horizontal / vertical mounting	**E50403002**	**1,2F / 1,2FV**	186	0,38 Kg	1,1	0,9



Recommended tightening torque for 3/8" BSPP: 10 Nm

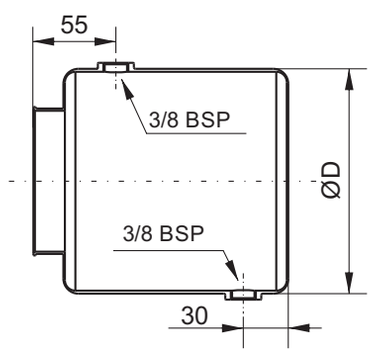

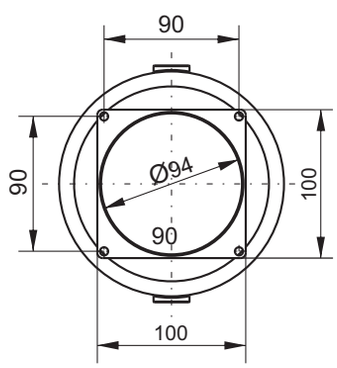

Description	Spare part code	Assembly code	L (mm)	ØD (mm)	Weight	Actual filling volume (lt)	
						Horizon.	Vert.
1,7 l cylindrical horizontal / vertical mounting	**E50404004**	**1,7H / 1,7HV**	170	120	0,64 Kg	1,5	1,2
2,4 l cylindrical horizontal / vertical mounting	**E50404006**	**2,4H / 2,4HV**	170	150	0,8 Kg	2,4	1,8

Material	Fe P04-EN10130 steel sheet 1,5 mm thickness
Fluid	Mineral based oil ISO/DIN 6743/4
Working temperature	-15 / +70°C

Note: the piping kit, standard suction filter, filler/breather and discharge plug are included when specifying the tank in PPM assembly code
When ordering spare parts, only the discharge plug and filler/breather are included