
POPPET TYPE - QCA - A SERIES

METRIC (L) BULKHEAD

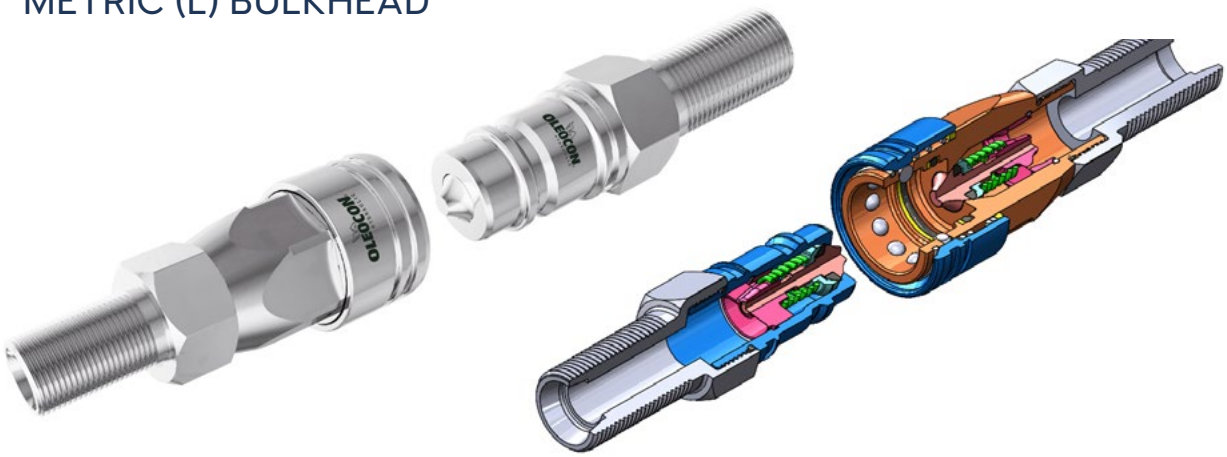

CLICK HERE
FOR 3D SECTION

TECHNICAL FEATURES AND OPTIONS

Locking Mechanism
Locking Ball System

Flow Rate
Up to 757 l / min

Material
Carbon Steel
Stainless Steel
Brass

Working Temperature
-20 °C / +100 °C

Interchange
ISO 7241-A

How to Connect
Push

Operating Pressure
Up to 250 Bar

Available Threads
Metric

Under Residual Pressure
Connetion: not Allowed
Disconnection: not Allowed

Body Sizes
ISO 6.3 - 50

Sealing Description
NBR - FKM

Valve Type
Popet

MAIN APPLICATIONS

OIL & GAS | AGRICULTURE | HYDRAULIC INDUSTRY | EARTH MOVING | HYDRAULIC EQUIPMENT | CONCRETE VEHICLES | VEHICLES | CHEMICAL INDUSTRY


INFORMATION

· Do not connect or disconnect under residual pressure.
· Top quality elastomer seals provide maximum sealing.
· The external sealing ring ensures a solid connection and prevents disconnection due to vibration.
· The design prevents pressure drops and turbulences.
· Durable, safe, compact and easy to use design.
· Please clean the mating surfaces thoroughly before connecting, in order to prevent contaminants to enter into the system.
· Please make sure that the male and female parts are aligned properly to achive full connection.

WARNING

· Connection and disconnection under dynamic pressure is not allowed.
· Connection and disconnection is not allowed when the temperature of the circulating fluid is above 80°C / 176°F.
· Make sure the system pressure is below the maximum working pressure.
· Please ensure that the OLEOCON product you have chosen is compatible with the temperature , material and pressure requirements of your system.
· Please contact OLEOCON technical support for any further questions.

TECHNICAL DRAWING

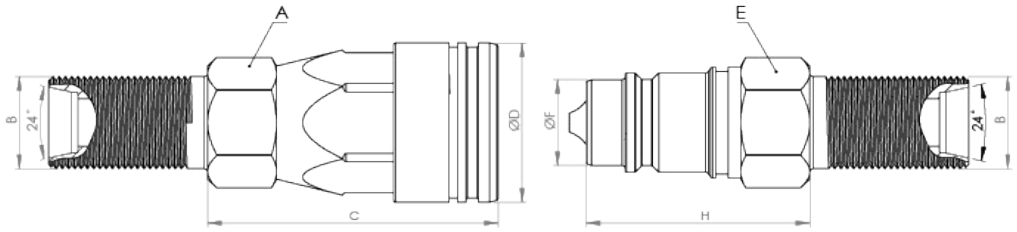

BODY SIZE	DESCRIPTION	COUPLING GENDER	Hex			THREAD SIZE(B)	DIAMETER			LENGTH			WEIGHT	
				mm	inch			mm	inch		mm	inch	kg	lbs
6,3	QCA-6A-M6L-BH	FEMALE	A	-	-	M12*1,5	D	-	-	C	-	-	-	-
	QCA-6B-M6L-BH	MALE	E	-	-	M12*1,5	F	-	-	H	-	-	-	-
10	QCA-10A-M8L-BH	FEMALE	A	24	0,94	M14*1,5	D	32	1,25	C	58	2,28	0,21	0,462
	QCA-10B-M8L-BH	MALE	E	22	0,86	M14*1,5	F	17,23	0,67	H	40	1,57	0,11	0,242
	QCA-10A-M10L-BH	FEMALE	A	24	0,94	M16*1,5	D	32	1,25	C	58	2,28	0,22	0,484
	QCA-10B-M10L-BH	MALE	E	22	0,86	M16*1,5	F	17,23	0,67	H	40	1,57	0,11	0,242
	QCA-10A-M12L-BH	FEMALE	A	24	0,94	M18*1,5	D	32	1,25	C	58	2,28	0,23	0,506
	QCA-10B-M12L-BH	MALE	E	22	0,86	M18*1,5	F	17,23	0,67	H	40	1,57	0,12	0,264
12,5	QCA-12A-M12L-BH	FEMALE	A	30	1,18	M18*1,5	D	38	1,49	C	69	2,71	0,32	0,704
	QCA-12B-M12L-BH	MALE	E	27	1,06	M18*1,5	F	20,48	0,80	H	47	1,85	0,15	0,33
	QCA-12A-M15L-BH	FEMALE	A	30	1,18	M22*1,5	D	38	1,49	C	69	2,71	0,34	0,748
	QCA-12B-M15L-BH	MALE	E	27	1,06	M22*1,5	F	20,48	0,80	H	47	1,85	0,18	0,396
	QCA-12A-M18L-BH	FEMALE	A	30	1,18	M26*1,5	D	38	1,49	C	69	2,71	0,39	0,858
	QCA-12B-M18L-BH	MALE	E	27	1,06	M26*1,5	F	20,48	0,80	H	47	1,85	0,22	0,484
20	QCA-20A-M15L-BH	FEMALE	A	38	1,49	M22*1,5	D	46,1	1,81	C	83	3,26	0,62	1,364
	QCA-20B-M15L-BH	MALE	E	36	1,41	M22*1,5	F	29	1,14	H	56	2,20	0,32	0,704
	QCA-20A-M18L-BH	FEMALE	A	38	1,49	M26*1,5	D	46,1	1,81	C	83	3,26	0,65	1,43
	QCA-20B-M18L-BH	MALE	E	36	1,41	M26*1,5	F	29	1,14	H	56	2,20	0,34	0,748
	QCA-20A-M22L-BH	FEMALE	A	38	1,49	M30*2	D	46,1	1,81	C	83	3,26	0,66	1,452
	QCA-20B-M22L-BH	MALE	E	36	1,41	M30*2	F	29	1,14	H	56	2,20	0,36	0,792

ISO 8434-1

BODY SIZE	WORKING PRESSURE						BURST PRESSURE					
	COUPLE		FEMALE		MALE		COUPLE		FEMALE		MALE	
	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI
6	31,5	4567	31,5	4567	31,5	4567	126	18270	126	18270	126	18270
10	31,5	4567	31,5	4567	31,5	4567	126	18270	126	18270	126	18270
12,5	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
19	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
25	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600
31,5	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600
40	16	2320	16	2320	16	2320	64	9280	64	9280	64	9280
50	10	1450	10	1450	10	1450	40	5800	40	5800	40	5800

POPPET TYPE - QCA - A SERIES

METRIC (L) BULKHEAD



CLICK HERE
FOR 3D SECTION

TECHNICAL FEATURES AND OPTIONS

Locking Mechanism
Locking Ball System

Flow Rate
Up to 757 l / min

Material
Carbon Steel
Stainless Steel
Brass

Working Temperature
-20 °C / +100 °C

Interchange
ISO 7241-A

How to Connect
Push

Operating Pressure
Up to 250 Bar

Available Threads
Metric

Under Residual Pressure
Connetion: not Allowed
Disconnection: not Allowed

Body Sizes
ISO 6.3 - 50

Sealing Description
NBR - FKM

Valve Type
Popet

MAIN APPLICATIONS

OIL & GAS | AGRICULTURE | HYDRAULIC INDUSTRY | EARTH MOVING | HYDRAULIC EQUIPMENT | CONCRETE VEHICLES | VEHICLES | CHEMICAL INDUSTRY


INFORMATION

· Do not connect or disconnect under residual pressure.
· Top quality elastomer seals provide maximum sealing.
· The external sealing ring ensures a solid connection and prevents disconnection due to vibration.
· The design prevents pressure drops and turbulences.
· Durable, safe, compact and easy to use design.
· Please clean the mating surfaces thoroughly before connecting, in order to prevent contaminants to enter into the system.
· Please make sure that the male and female parts are aligned properly to achive full connection.

WARNING

· Connection and disconnection under dynamic pressure is not allowed.
· Connection and disconnection is not allowed when the temperature of the circulating fluid is above 80°C / 176°F.
· Make sure the system pressure is below the maximum working pressure.
· Please ensure that the OLEOCON product you have chosen is compatible with the temperature , material and pressure requirements of your system.
· Please contact OLEOCON technical support for any further questions.

TECHNICAL DRAWING

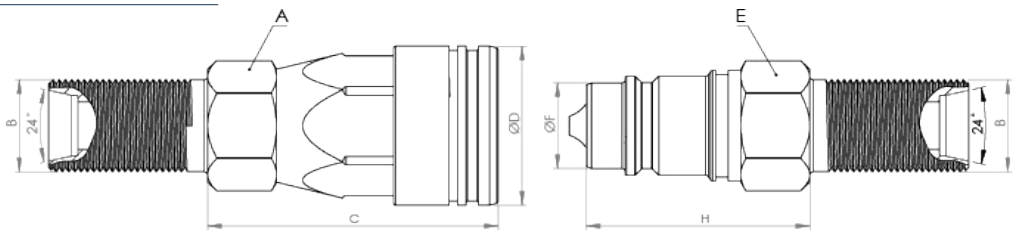

BODY SIZE	DESCRIPTION	COUPLING GENDER	Hex			THREAD SIZE(B)	DIAMETER			LENGTH			WEIGHT	
				mm	inch			mm	inch		mm	inch	kg	lbs
25	QCA-25A-M18L-BH	FEMALE	A	46	1,81	M26*1,5	D	54	2,12	C	99,2	3,90	0,75	1,65
	QCA-25B-M18L-BH	MALE	E	41	1,61	M26*1,5	F	34,21	1,34	H	66	2,59	0,4	0,88
	QCA-25A-M22L-BH	FEMALE	A	46	1,81	M30*2	D	54	2,12	C	99,2	3,90	0,77	1,694
	QCA-25B-M22L-BH	MALE	E	41	1,61	M30*2	F	34,21	1,34	H	66	2,59	0,41	0,902
	QCA-25A-M28L-BH	FEMALE	A	46	1,81	M36*2	D	54	2,12	C	99,2	3,90	0,8	1,76
	QCA-25B-M28L-BH	MALE	E	41	1,61	M36*2	F	34,21	1,34	H	66	2,59	0,44	0,968
31,5	QCA-31A-M22L-BH	FEMALE	A	55	2,16	M30*2	D	68	2,67	C	117,2	4,61	1,35	2,97
	QCA-31B-M22L-BH	MALE	E	50	1,96	M30*2	F	44,9	44,9	H	75	2,95	0,52	1,144
	QCA-31A-M28L-BH	FEMALE	A	55	2,16	M36*2	D	68	2,67	C	117,2	4,61	1,36	2,992
	QCA-31B-M28L-BH	MALE	E	50	1,96	M36*2	F	44,9	44,9	H	75	2,95	0,53	1,166
	QCA-31A-M35L-BH	FEMALE	A	55	2,16	M45*2	D	68	2,67	C	117,2	4,61	1,37	3,014
	QCA-31B-M35L-BH	MALE	E	50	1,96	M45*2	F	44,9	44,9	H	75	2,95	0,53	1,166
40	QCA-40A-M35L-BH	FEMALE	A	70	2,75	M45*2	D	83	3,26	C	134,2	5,28	2,68	5,896
	QCA-40B-M35L-BH	MALE	E	60	2,36	M45*2	F	54,93	2,16	H	84	3,30	0,98	2,156
	QCA-40A-M42L-BH	FEMALE	A	70	2,75	M52*2	D	83	3,26	C	134,2	5,28	2,7	5,94
	QCA-40B-M42L-BH	MALE	E	60	2,36	M52*2	F	54,93	2,16	H	84	3,30	0,99	2,178
50	QCA-50A-M35L-BH	FEMALE	A	80	3,14	M45*2	D	99	3,89	C	160,2	6,30	3,9	8,58
	QCA-50B-M35L-BH	MALE	E	75	2,95	M45*2	F	65	2,55	H	97	3,81	1,5	3,3
	QCA-50A-M42L-BH	FEMALE	A	80	3,14	M52*2	D	99	3,89	C	160,2	6,30	3,91	8,602
	QCA-50B-M42L-BH	MALE	E	75	2,95	M52*2	F	65	2,55	H	97	3,81	1,51	3,322

ISO 8434-1

BODY SIZE	WORKING PRESSURE						BURST PRESSURE					
	COUPLE		FEMALE		MALE		COUPLE		FEMALE		MALE	
	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI	MPa	PSI
6	31,5	4567	31,5	4567	31,5	4567	126	18270	126	18270	126	18270
10	31,5	4567	31,5	4567	31,5	4567	126	18270	126	18270	126	18270
12,5	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
19	25	3625	25	3625	25	3625	100	14500	100	14500	100	14500
25	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600
31,5	20	2900	20	2900	20	2900	80	11600	80	11600	80	11600
40	16	2320	16	2320	16	2320	64	9280	64	9280	64	9280
50	10	1450	10	1450	10	1450	40	5800	40	5800	40	5800