
TUBOFLEX
Modular Coolant Hose System

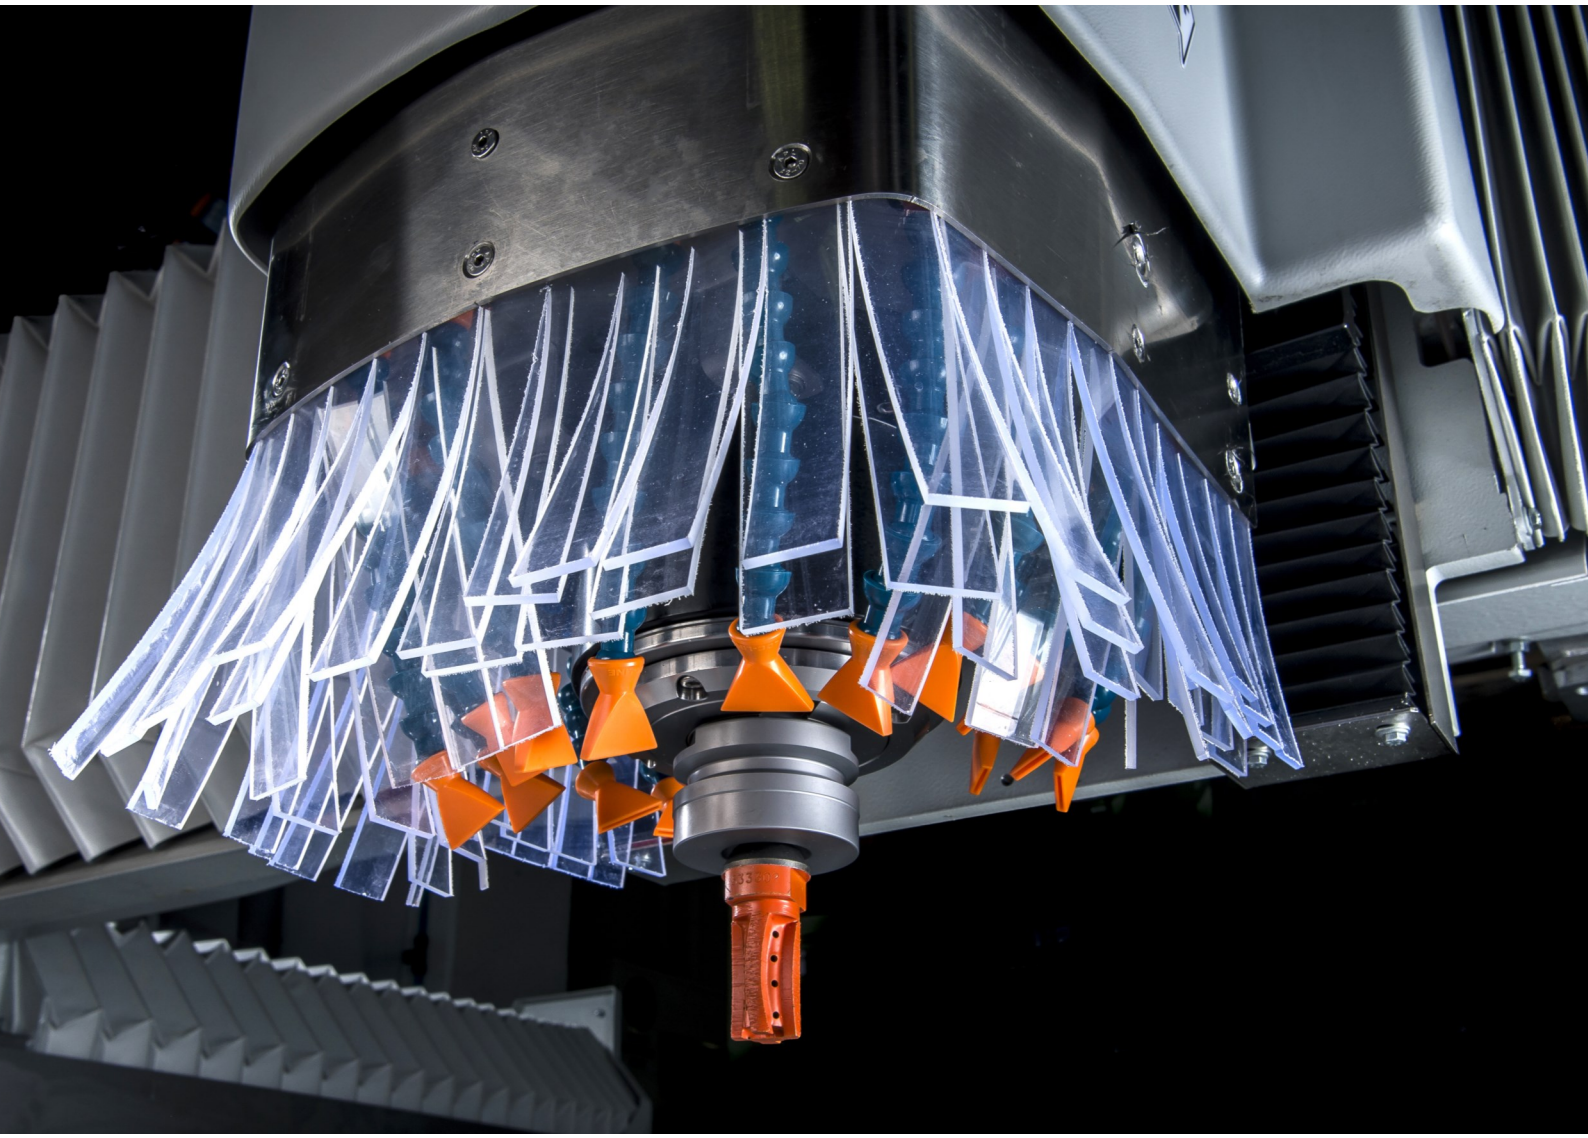

Adjustable Coolant Hose Systems

TUBOFLEX is a universal modular coolant hose system offering maximum flexibility. The wide range of hose joints, nozzles, connectors, Y-junctions and stop valves provides an optimum solution for every cooling and lubrication task.
TUBOFLEX is available in 3 different sizes 1/4", 1/2" and 3/4".

AWS PLASTIC
PLASTIC STORE COMPONENTS

TUBOFLEX
Modular Coolant Hose System

TECHNICAL DATA SHEET

Material: Acetal Copolymer (POM)
Temperatures
Working Temperature: -20° C to 80° C
Max. Temperature of use: 80° C
Melting Point: 165° C

1/4"SYSTEM: Internal Dimensions ID 7 mm - Pressure 4.0 bar - Range 15 l/min
1/2"SYSTEM: Internal Dimensions ID 12 mm - Pressure 2.0 bar - Range 30 l/min
3/4"SYSTEM: Internal Dimensions ID 20 mm - Pressure 1.5 bar - Range 72 l/min

Certification for Food Contact
Certifications FDA
Hoses, fittings and nozzles Tuboflex in neutral color (white) are produced using materials approved by FDA (Food and Drug Administration)
Certifications NSF 51 & 61
Hoses, fittings and nozzles Tuboflex in neutral color (white) are suitable for contact with foodstuffs & drinking water according to NSF 51 & 61 certifications
Certifications WRAS
Hoses, fittings and nozzles Tuboflex in neutral color (white) meet the requirements of the UK WRAS - Water Regulations Advisory Scheme
Certifications KTW-W270
Hoses, fittings and nozzles Tuboflex in neutral color (white) meet the requirements of the KTWW270

Products comply with Directive 2002/95 / EC

List of Suitable Fluids		
Acetone	Yes	
Acids		No
Alcohol Ethyl	Yes	
Bases Strong		No
Ammonium Hydroxide		No
Detergents Commercial	Yes	
Gasoline	Yes	
Lubricants	Yes	
Oils	Yes	
Greases	Yes	
Hypochlorite Ion Solutions		No