

RELIEF VALVE
(Differential Area, Poppet)

Ordering Code:	**RD-08W-X-Y-Z**

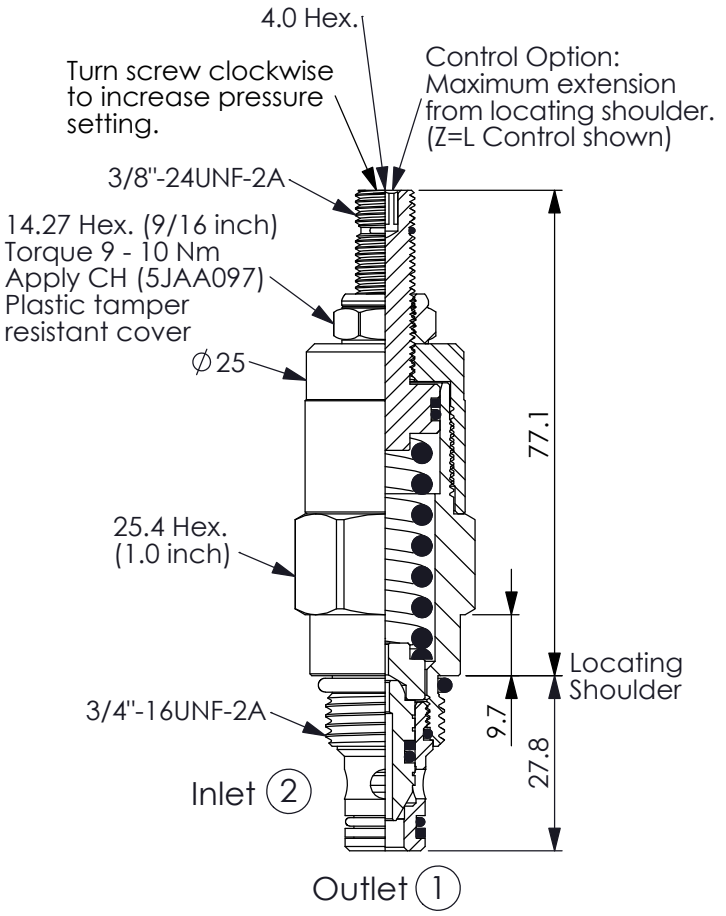

UNIT:mm


Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA

Max. pressure:	240	bar
Rated flow:	30	l/min
Cavity-Tooling:	08W-2	
Installation torque:	25 - 35	Nm
Weight:	0.22	kg

If Port (2) would be rated for full pressure and suitable for cross-relief circuit application, the installation of double back-up rings is mandatory. **Please consult the Winner sales department for technical support.**

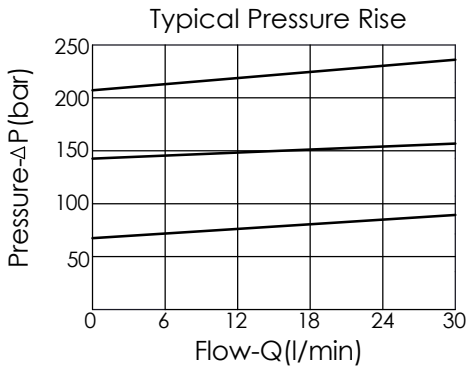

X	OPERATION	
2A	(2) to (1) (P to T)	

- Response Time-Typical (2 ms)
- Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)
- Dirt tolerant

Y	PRESSURE SETTING	
A	17 - 210 bar (70 bar Standard Setting)	
B	6.9 - 105 bar (70 bar Standard Setting)	
W	20 - 260 bar (70 bar Standard Setting)	

Z	OPTIONS		
L	Leakproof hex. socket screw.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	