Oil Sight Glass

Innovative solution to oil inspection and easy elimination of accumulated water



FEATURES:

- 360° view of oil clarity
- Attaches to drain port to easily collect and drain water
- Durable and UV Resistant
- Dual-mount design for easy vertical or horizontal installation
- Option for magnetic drain valve
- Stainless steel fitting package available

MATERIALS & COMPONENTS:

- **Body:** Transparent Polyamide
- **Drain Valve, Hex Nipple:** Brass

CHEMICAL COMPATIBILITY

Compatible with all mineral oils and most synthetic oils (Contact Des-Case technical support for chemical compatibility inquiries)


[1]PERFORMANCE SPECIFICATIONS:

Recommended Temperature Range	-40°F to 200°F (-40°C to 93°C)
Maximum Operating Pressure	65 psi (4.48 bar)

[1]**NOTE:** Small variations in the manufacturing process can be common and will be within the allowable engineering tolerances. All above data is nominal and provided for information only and subject to change. All metric conversions are approximate.

DIMENSIONS:

Part Code	Volume	Thread Size
DC-OSG1X250	1 oz	¼" NPT
DC-OSG1X375	1 oz	⅜" NPT
DC-OSG1X500	1 oz	½" NPT
DC-OSG3X250	3 oz	¼" NPT
DC-OSG3X375	3 oz	⅜" NPT
DC-OSG3X500	3 oz	½" NPT

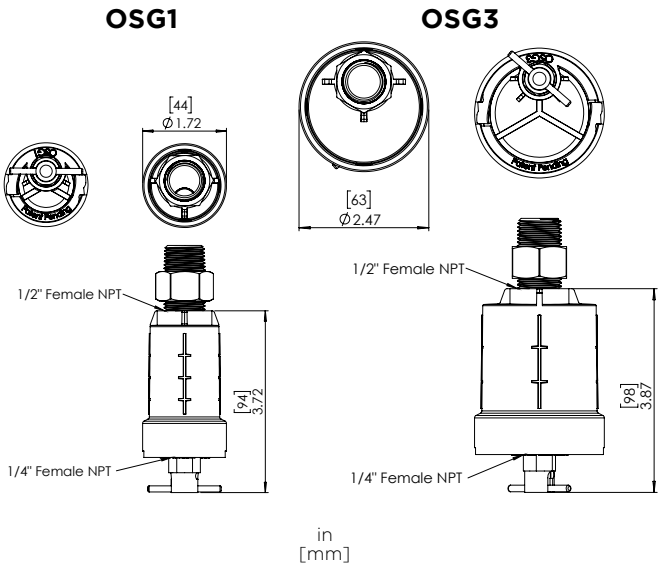

TS10-41_EN_011026

Typical Applications:

- Pumps
- Gearboxes
- Oil Reservoirs

Typical Industries:

- Pulp & Paper
- Food & Beverage
- Petrochemical & Refinery

© 2026 Des-Case Corporation. All rights reserved. Des-Case® is a registered trademark of Des-Case Corporation