
KAZEL HYDRAULIC EQUIPMENTS


4 HOLES K KEYED BI-DIRECTIONAL GEAR PUMP
4 DELİKLİ K KAMALI ÇİFT YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100			Working temperature -15°C +100°C		
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

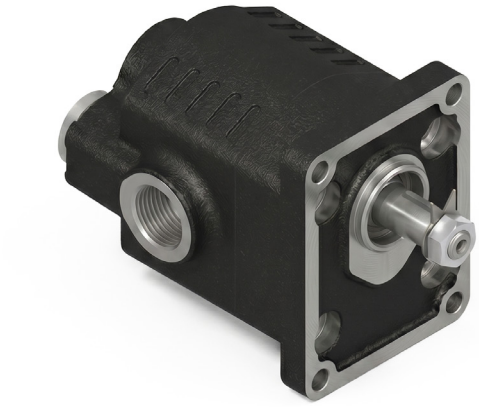

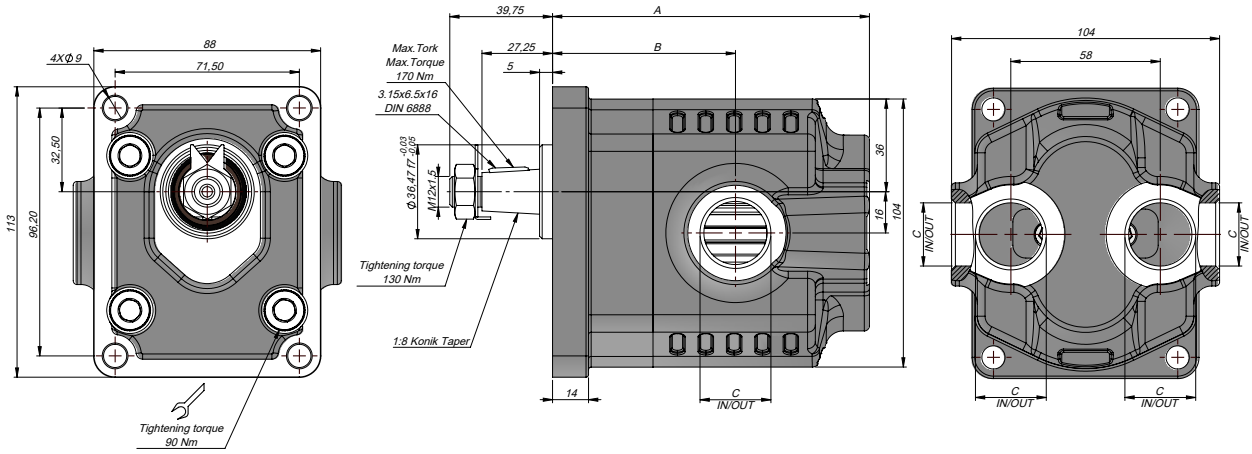

Kod Code	İletim Hacmi Displacement	Max. Sürekli Basıncı Max. Continuous Pressure	Hız Aralığı Speed Range (Hour/Minute)-(Rev / Minute)		A	B	Giriş Inlet	Çıkış Outlet
BD	(cm^3/rev)	(BAR)	Min. Sürekli Min. Continuous	Maks. Sürekli Max. Continuous	(mm)	(mm)	C	C
G20006KK631	6	280	300	2300	93	59	G1/2"	G1/2"
G20010KK631	10				99	65		
G20016KK631	16				109	65		
G20020KK631	20	260			115	69		
G20025KK631	25	220			123	71	G3/4"	G3/4"
G20032KK631	32	190		2100	134	82		
G20040KK631	40	180		1900	147	95		