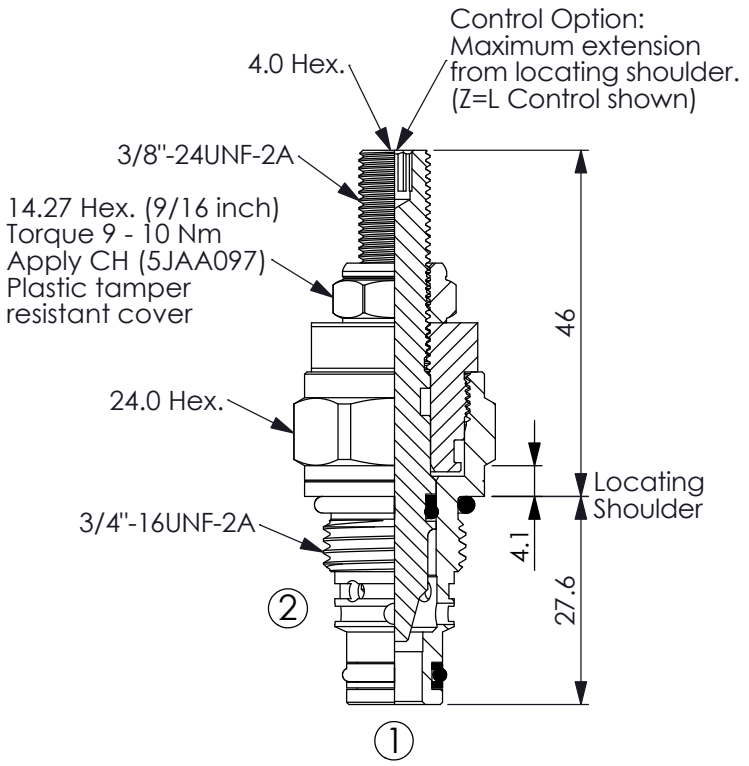

FLOW CONTROL VALVE
(Fully Adjustable Needle)

Ordering Code:	**NV-08W-X-Y-Z**



UNIT:mm

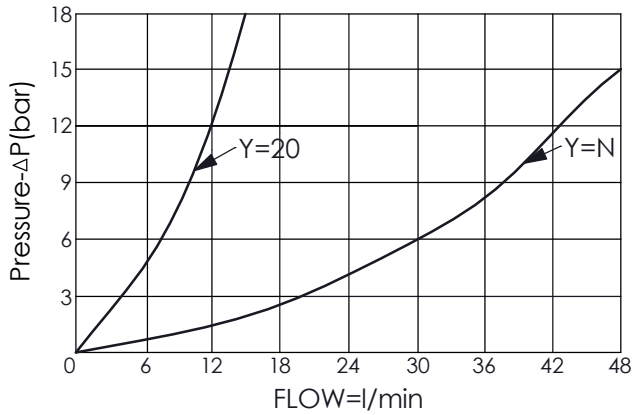
Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA





Max. operating pressure:	350	bar
	(Refer To Performance Chart)	
Rated Flow:	36	l/min
	(Refer To Performance Chart)	
Cavity-Tooling:	08W-2	
Installation torque:	25 - 35	Nm
Weight:	0.13 (**Z**=L)	kg

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS



X	OPERATION	
20	Needle Valve	

Y	MAXIMUM NOMINAL ORIFICE	
N	∅ 5.6 mm	
20	∅ 2.0 mm	

Z	OPTIONS	
L	Leakproof hex. socket screw. 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 	
E	Handknob and locknut. 	
B	Handknob and aluminum locknut. 	
T Standard Black	Three-winged Handknob Kit. Optional: Red (**T1**) 