

5/8-18 UNF MAIN CHECK VALVE



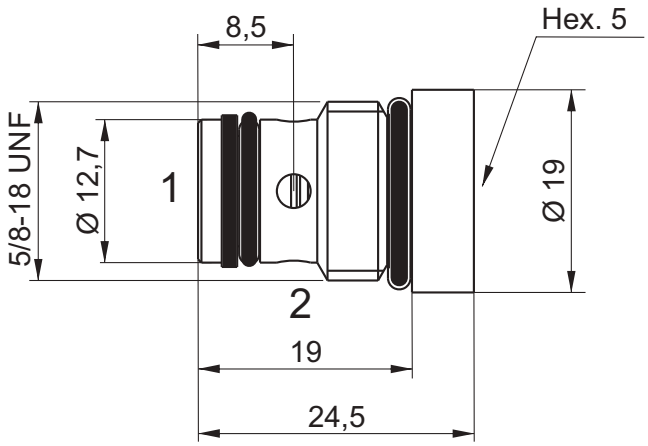



Main features

Max pressure	350 bar
Weight	0.045 Kg
Max flow	15 l/min
Tightening torque	25 Nm
Fluid temperature	-30°C ÷ +80°C
Cracking pressure	1 bar
Filtration	ISO 4406
Max current	10A - 400A

Spare part code

VUC — **Check valve**


10 — **Nominal size:** 10

- — **Options:**
- = ball type
C = poppet type

Assembly code

JM (VUC10)
JP (VUC10C)

Pressure drop diagram

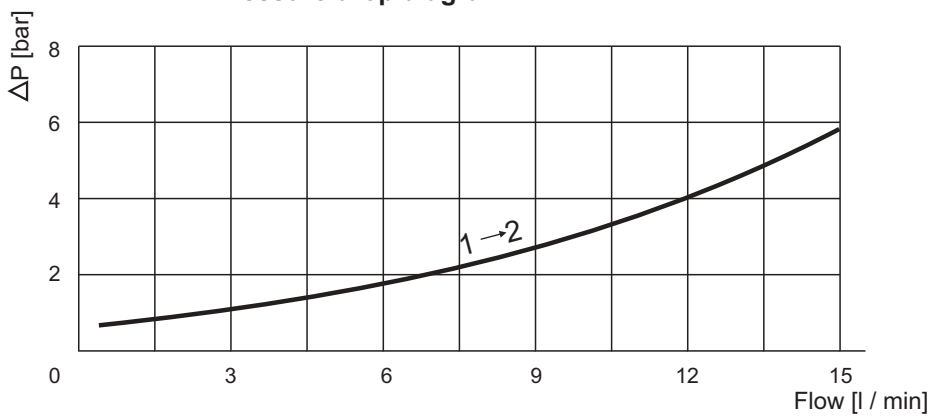

Note: Values measured on valve alone (no cavity) with an oil viscosity of 46 cSt at 50 °C. Pressure drop may change depending on fluid viscosity and temperature