
AM3H... 2 AND 3 WAY HYDROSTATS CETOP 3

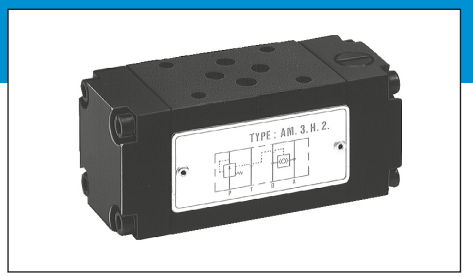


AM3H...

The 2 or 3 way pressure regulator type AM3H ensure the constant set flow rate in the presence of varying system load (pressure) by keeping constant the pressure drop (Δp = 4/8 bar) in relation to the flow rate regulation.
In order to achieve the direction and flow rate dual control function, it is normally used together with a proportional solenoid valve


Max. flow	25 l/min
Max. operating pressure	350 bar
Δp adjustment	4 bar
	8 bar
Fluid viscosity	10 ÷ 500 mm²/s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 8 in accordance with NAS 1638 with filter $ß_{10}≥75$
Weight	1,4 Kg

ORDERING CODE


AM	Modular valve
3	CETOP 3/NG6
H	Hydrostat
**	**2V** = 2 way **3V** = 3 way
P1	Function at port P
**	Differential pressure (Δp) **04** = Δp 4 bar **08** = Δp 8 bar
**	**00** = No variant **V1** = FKM
2	Serial No.



AM3H2VP1...




AM3H3VP1...



Proportional valve XD3C...

Hydrostat **AM3H2V...**

BASE




Proportional valve XD3C...


Hydrostat **AM3H3V...**

BASE


AM3H2VP1... FLOW - LOAD PRESSURE CURVE




AM3H2VP1... ΔP - REGULATED FLOW CURVE



AM3H3VP1... FLOW - LOAD PRESSURE CURVE



AM3H3VP1... ΔP - PUMP FLOW



OVERALL DIMENSIONS

