
PM30

VARIABLE DISPLACEMENT PUMP
CLOSED LOOP CIRCUIT

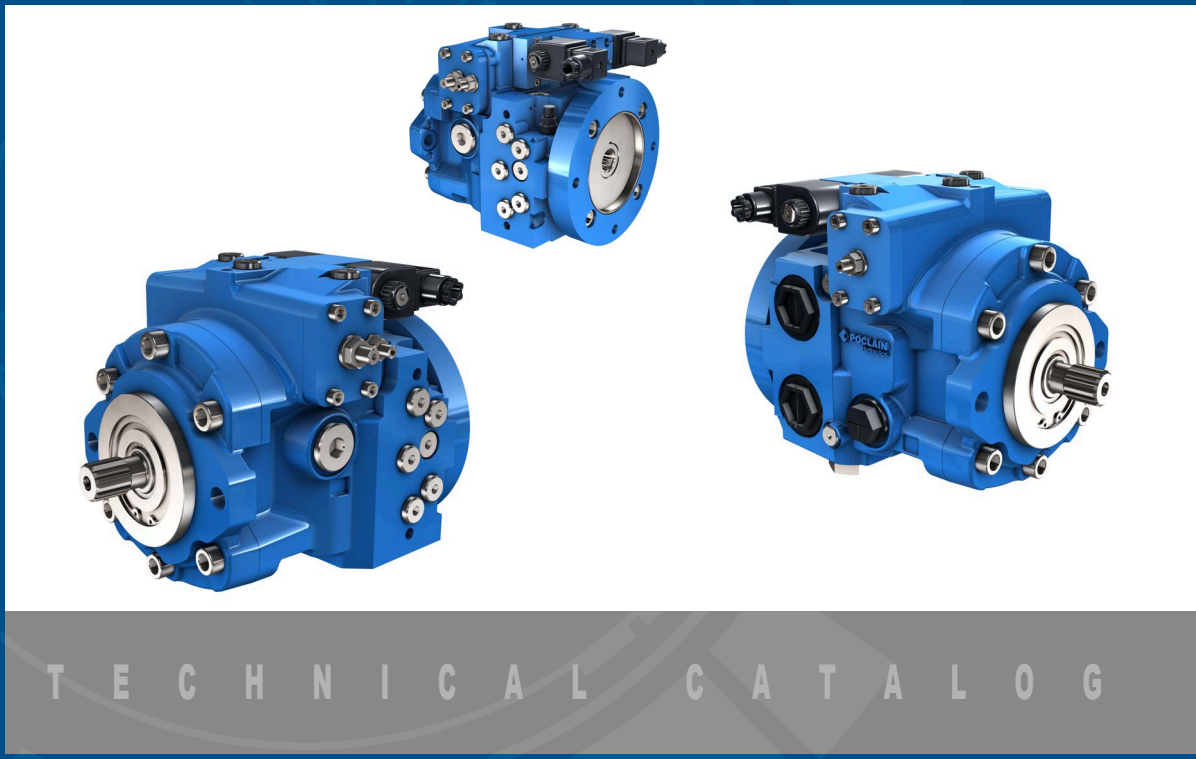

TECHNICAL CATALOG

POCLAIN Hydraulics

OVERVIEW

PM30 is a variable displacement, axial piston pump, with swashplate system, for closed loop hydrostatic transmissions.

It provides a continuously variable flow rate between zero and maximum in forward and reverse direction. Flow rate is proportional to rotation speed and swashplate angle.


It can feature a charge pump to keep the circuit pressurised. This avoids risk of cavitations and ensures a good performance of the transmission.

It offers several types of control: Servo mechanical, Servo hydraulic, Electrical, Electro-proportional and Automotive. Hydraulic and electro-proportional ones can be equipped with feed-back device.


It is equipped with high pressure relief valves and can be delivered with auxiliary gear pumps.

It is available in single or tandem versions.


As options, PM30 can be featured with roller bearing, customised identification plate, mechanical inching, filter on pressure line, external connections for filter, UNF thread ports, finishing coat, fluorinated elastomer seals, flushing valve, VPU valve and anti-stall valve.

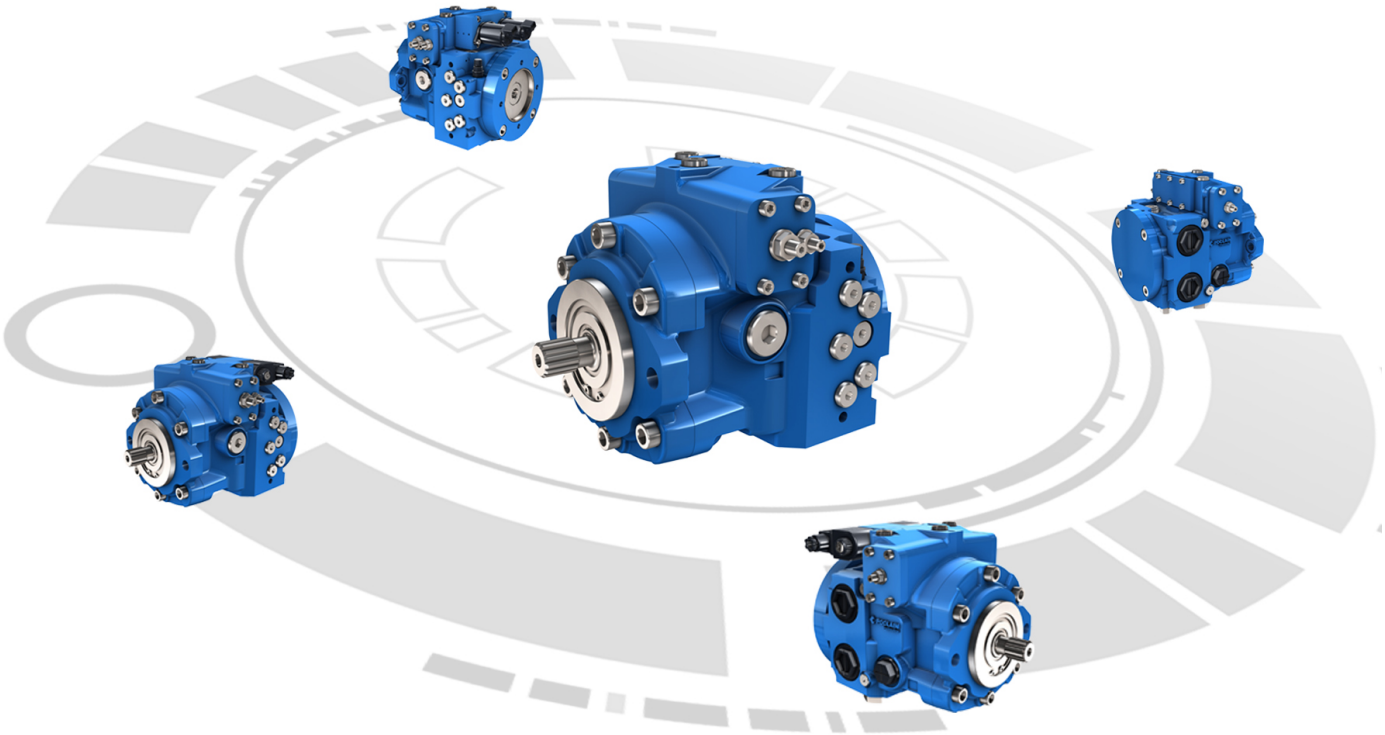


		PM30-25	PM30-28	PM30-30	PM30-35
Displacement	cm³/rev *[in³/rev.]*	24,83 *[1.52]*	28,14 *[1.72]*	29,82 *[1.82]*	34,23 *[2.09]*
Theoretical Flow at 3 400 rpm	L/min *[GPM]*	84,4 *[22.29]*	95,7 *[25.28]*	101,4 *[26.79]*	116,4 *[30.75]*
Theorical absorbed torque at Δp = 275 bar *[3 898 PSI]*	N.m *[in.lbf]*	108,7 *[962]*	123,2 *[1 090]*	130,5 *[1 155]*	149,8 *[1 326]*
Max. Theoretical absorbed power at 3 400 rpm, Δp = 395 bar *[5 729 PSI]*	kW *[HP]*	55,6 *[75]*	63 *[84]*	66,7 *[89]*	76,6 *[103]*
Moment of inertia	kg.m² *[slug.ft²]*	0.0028 *[0.0018]*			
Mounting flange		SAE B, SAE BB			
Controls		Servo mechanical, Servo hydraulic, Electrical, Electro-proportional, Automotive			
Mass	kg *[lb]*	29 *[63.9]*			
Rotation		Clockwise or Counterclockwise			



CONTENT

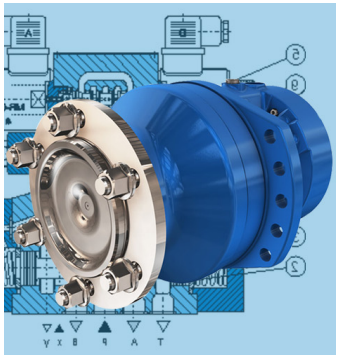









MODEL CODE 4

TECHNICAL SPECIFICATION 6
Port characteristics 6
Main dimensions 7

OPERATING PARAMETERS 9
Operating parameters 9
Charge pressure 9
Case pressure 9
Pressure ratings 9
Speed ratings 9
Inlet pressure 10
Theoretical output 10
Poclain Hydraulics recommendations for fluid 10
Fluid and filtration 11
Viscosity range 11

SYSTEM DESIGN PARAMETERS 12
Sizing equations 12
Redundant braking system requirement 12
Loop flushing 12
Reservoir 13
Case drain usage for tandem pump 13
Differential pressure 13
Bearing life and external shaft loading 14
Mounting flange loads 15
Hydraulic unit life 15

FEATURES 16
High pressure relief valve 16
Charge relief valve 17
Charge pump 18
By-pass 20
Displacement limiters 20
Fundamental dimensions for coupling assembly 21
Mounting flange and shafts 21
Auxiliary mounting pad 22
Tandem pumps 24

CONTROLS 27
Mechanical servo control with feedback 27
Hydraulic servo control 29
Hydraulic servo control with feedback 31
Hydraulic automotive control 33
Electrical on-off servo control 35
Electro-proportional servo control 36
Electro-proportional servo control with feedback 38

OPTIONS 39

MODEL

P	M	3	0	1	2	3	4	5	6

1

Displacement cm³/rev *[in³/rev]*	
24,83 *[1.52]*	**25**
28,14 *[1.72]*	**28**
29,82 *[1.82]*	**30**
34,23 *[2.09]*	**35**

On request the values of max. displacement for A/B ports can be different. In this case introduce 2 values, first for port A.

2

Mounting flange and shaft	
SAE B; splined shaft z =13, 16/32'' D.P.	**S3**
SAE BB; splined shaft z =15, 16/32'' D.P.	**S4** (Standard)

3

Control	
Mechanical servo control with feedback	**A**
Direct hydraulic servo control	**S**
Hydraulic servo control with feedback	**T**
Hydraulic automotive control 12V	**D12**
Hydraulic automotive control 24V	**D24**
Electrical on-off servo control with return spring without electrovalve	**B00**
Electrical on-off servo control with return spring and electrovalve 12V	**B12**
Electrical on-off servo control with return spring and electrovalve 24V	**B24**
Electro-proportional servo control 12V	**P12**
Electro-proportional servo control 24V	**P24**
Electro proportional servo control 12V with feedback	**Q12**
Electro proportional servo control 24V with feedback	**Q24**

4

Restrictor mm *[in]*	
Without restrictor	**00**
Ø 0,6 *[dia. 0.023]*	**06**
Ø 0,7 *[dia. 0.027]*	**07**
Ø 0,8 *[dia. 0.031]*	**08**
Ø 1,0 *[dia. 0.039]*	**10**
Ø 1,2 *[dia. 0.047]*	**12**


5

High pressure relief valve setting Max. system pressure (bar *[PSI]*)	
Without valve (only check valve)	**00**
150 *[2 175]*	**15**
200 *[2 900]*	**20**
250 *[3 625]*	**25**
300 *[4 351]*	**30**
350 *[5 076]*	**35**
370 *[5 366]*	**37**
400 *[5 801]*	**40**
420 *[6 092]*	**42**

On request the values of HPRV for A/B ports can be different. in this case introduce 2 values, first for port A.

6

Rotation	
Clockwise	**R**
Counter clockwise	**L**



CODE

7 8 9 10 11

7

Charge relief valve setting bar *[PSI]*	
Without charge relief valve	00
20 *[290]*	20
25 *[363]*	25
30 *[435]*	30

8

Charge pump displacement cm^3/rev *[in^3/rev]*	
Without charge pump	00
8 *[0.49]*	08
11 *[0.67]*	11
15,8 *[0.96]*	16

9

Auxiliary mounting pad	
Without auxiliary mounting pad	S
SAE A flange; z = 9	A
SAE A flange; z = 11	E
SAE B flange; z = 13	B
SAE BB flange; z = 15	C
Tandem (without charge pump)	T

10

Gear pump cm^3/rev *[cu.in/rev]*		
Without gear pump		00
SAE A flange (if digit 9 = A)	4,0 *[0.24]*	04
	6,0 *[0.37]*	06
	8,5 *[0.52]*	08
	11,0 *[0.67]*	11
	14 *[0.85]*	14
	16,5 *[1.00]*	17
	19,5 *[1.19]*	20
	22,5 *[1.37]*	22
	26 *[1.59]*	26

Different gear pump (group 3, SAE B pad) can be provided. Contact your Poclain Hydraulics application engineer for available displacements.

11

Options	
Without option	00
Roller bearing	CR
Customized indentification plate	DP
Mechanical inching	IC
External inching	HI
Neutral position switch	MI
Filter on pressure line without clogging indicator	F0
Filter on pressure line with clogging indicator	F2
External connections for filter	F3
SAE flange ports	FS
UNF threads ports	FU
Finishing coat	PA
Flushing valve	VS
VPU valve	VPU
Fluorinated elastomer seals	EV
Anti-stall valve	SD
Speed sensor	SS
Brake inching	B1
Brake inching	B2
Special version	ES

In case of request for a combination of several options, please contact your Poclain Hydraulics application engineer for further information.


The pressure filter options F0, F2, F3 aren´t available with Hydraulic automotive control (D12, D24) or Anti-stall valve (SD).

The speed sensor (option SS) isn´t available with Filter on pressure line (options F0, F2).

Mechanical (IC), hydraulics (HI) and brake inchings (B1, B2) are available only with Hydraulic automotive control (D12, D24).


TECHNICAL

Port characteristics

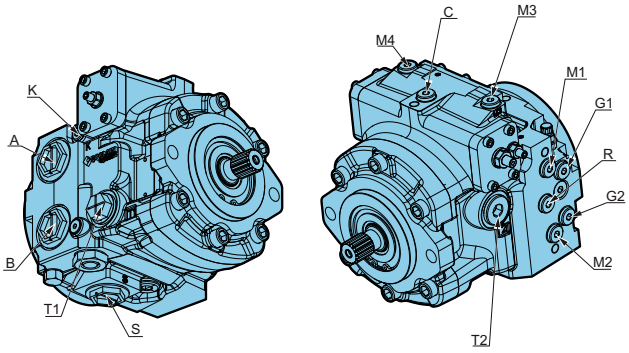

Port	Function	ISO 1179-1 (standard)	Maximum lenght of nipples [mm] *[in]*
A/B	Services	PN400-DN19	
C	Case pressure	13G-G1/4	
G1/G2	Auxiliary/Charge pressure	13G-G1/4	
M1/M2	A/B pressure	13G-G1/4	
M3/M4	Servo control	13G-G1/4	12,5 *[0.49]*
K	External servo pilot	10G-G1/8	
R	Servo pilot pressure	13G-G1/4	
S	Suction	34G-G1	
T1/T2	Drain	27G-G3/4	

See options FS and FU on page 41 for SAE and UNF port sizes.





SPECIFICATIONS

Main dimensions

PM30 - SAE BB - splined shaft with hydraulic servo control with internal charge pump and without auxiliary mounting pad

1	2	3	4	5	6	7	8	9	10	11
P M 3 0		S4	S						S			

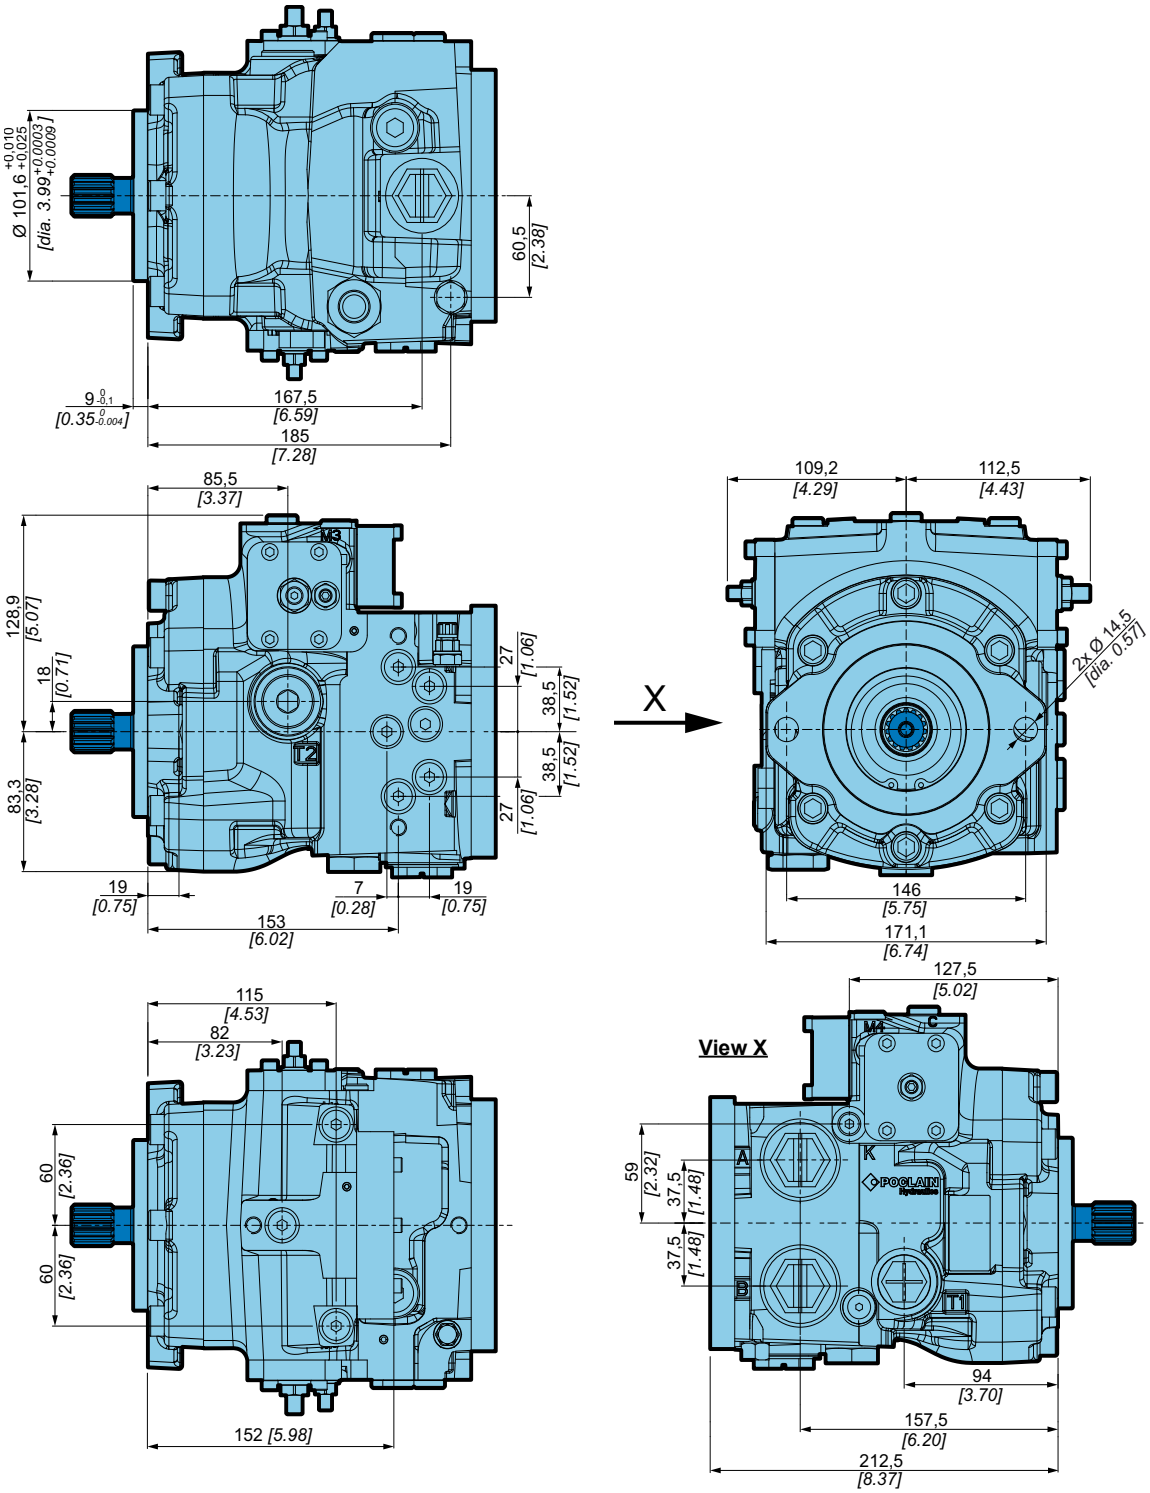



OPERATING PARAMETERS

Operating parameters

			PM30-25	PM30-28	PM30-30	PM30-35
Speed ratings	Minimum	min^{-1}(rpm)		700		
	Max. without load			3 600		
	Max. with load			3 400		
System pressure	Rated	bar *[PSI]*		300 *[4 351]*		
	Maximum			420 *[6 091]*		
	Minimum low loop			15 *[218]*		
Inlet pressure	Mini continuous	bar (abs.) *[PSI abs.]*		0,8 *[11.6]*		
	Mini (cold start)			0,5 *[7.2]*		
Case pressure	Continuous	bar *[PSI]*		2 *[29]*		
	Maximum (cold start)			3,5 *[50.7]*		
Charge pressure	Standard version	bar *[PSI]*		25 *[362.6]*		
	Max. charge pressure			30 *[435]*		
Servo case pressure	Maximum	bar *[PSI]*		30 *[435]*		

Charge pressure

A charge flow is required to maintain a positive pressure in the low pressure loop of a closed loop hydrostatic transmission. Charge pressure ensures proper lubrication and rotating group operation. It is recommended to maintain the charge pressure at a minimum of 15 bar *[218 PSI]* above case pressure. For more details, refer to charge pump paragraph, page 18.

Case pressure

Case pressure must be maintained within the limits shown in the table "Operating parameters". Ensure housing is always filled with hydraulic fluid and especially during start-up of the machine.

Pressure ratings

Maximum peak pressure
It is the maximum allowable pressure. It is equivalent to the maximum setting of the maximum high pressure relief valve. A self-propelled machine can reach the maximum peak pressure value no more than 1-2% of that work cycle.

Work cycle
A fundamental factor for ensuring correct hydrostatic transmission sizing is the machine work cycle (pressure-time ratio, seasonality, pressure vs. percentage of time at max. displacement, machine type). Part service life depends on the correct choice in relation to the work cycle.

Overloads
It is mandatory to protect parts against any possible overloads.

Speed ratings

The table "Operating parameters" gives minimum and maximum rated speeds. Note that all displacements might operate under different speed limits. Definitions of these speed limits appear below.

Maximum speed is the highest operating speed allowed. Over speeding reduces pump life time, can lead to loss of hydrostatic power and braking capacity. Never exceed the maximum speed limit under any operating conditions.

Nominal speed is the speed offering the maximal efficiency.

Inlet pressure

Charge pump inlet pressure is key for acceptable pump life and performances. A continuous inlet pressure of not less than 0,8 bar abs. *[11.6 PSI abs.]* is recommended. A continuous inlet pressure less than 0.5 bar abs. *[7.2 PSI abs.]* indicates inadequate inlet design or a restricted filter. Pressures less than 0.5 bar abs. *[7.2 PSI abs.]* can happen at cold start, but should increase with oil temperature.

Theoretical output

Theoretical output flow is a function of pump displacement and speed. It is relevant to size the rest of the circuit. Theoretical flow does not take into account losses due to leakage or variations in displacement.

Poclain Hydraulics recommendations for fluid



Poclain hydraulics recommends the use of hydraulic fluids defined by the ISO 15380 and ISO 6743-4 standards.
For temperate climates, the following types are recommended.
- HM 46 or HM 68 for fixed installations.
- HV 46 or HV 68 for mobile installations.
- HEES 46 for mobile installations.

These specifications correspond to category 91H of the CETOP standard, parts 1, 2 and 3 of the DIN 51524 standard, and grades VG32, VG 46 and VG68 of the ISO 6743-4 standards.



It is also possible to use ATF, HD, HFB, HFC or HFD type hydraulic fluid upon Poclain Hydraulics specific approval of the components' operating conditions.

Standardized designations for the fluids
- **HM :** Mineral fluids having specific antioxidant, anticorrosion and antiwear properties (HLP equivalent to DIN 51524 parts 1 and 2).
- **HV :** HM mineral fluids providing improved temperature and viscosity properties (DIN 51524 part 3).
- **HEES :** Biodegradable fluids based on organic esters.



It is also possible to use a fluid that meets the biodegradability criteria and is compatible in the event of accidental food contact. The BIOHYDRAN FG 46 fluid designed by the company Total has undergone testing of its properties and performance on our test benches. Since this type of fluid has not yet been categorized, it is the responsibility of machine manufacturers to validate its compatibility with all of the components used in order to guarantee that the intended functions will be fulfilled and this for the desired life time of all equipment items.



For biodegradable fluids, consult your Poclain Hydraulics' application engineer




During operation, the temperature of the oil must be between 0°C *[32°F]* and 80°C *[176°F]*; the minimum and maximum temperatures may be exceeded momentarily by ± 20°C *[± 68°F]* for a duration of less than 30 minutes. For all applications outside these limits, please consult with your Poclain Hydraulics' application engineer.

Pump storage



If the pump stays on stock for more than 6 months, a status verification must be performed before you install it on a machine. Pay attention to sealing condition, rust presence and free rotation of shaft.



Fluid and filtration

The contaminating particles suspended in the hydraulic fluid cause the hydraulic mechanisms moving part wear. On hydraulic pumps, these parts operate with very small dimensional tolerances. In order to reach the part life, it is recommended to use a filter that maintains the hydraulic fluid contamination class at a max. of:

9 according to NAS 1638
20/18/13 according to ISO 4406:2001

According to the type of application decided for the pump, it is necessary to use filtration elements with a filtration ratio of:

β 20 to 30 ≥ 100

Making sure that this ratio does not worsen together with the increasing of the filter cartridge differential pressure.

If these values cannot be observed, the component life will consequently be reduced and it is recommended to contact the Poclain Hydraulics Customer Service.


Filters on charge circuit
Filters on the charge circuit (F0-F2) are designed without by-pass. The max. pressure drop on the filtration part must not exceed 2 bar *[29 PSI]* (3 bar *[43.5 PSI]* in case of cold starting) at pump full rating. To monitor the pressure drop, It is recommended to use the clogging indicator on the filtration element (F2 option). Contact your Poclain Hydraulics Application engineer, each time the pump is not charged by its internal charge pump.
Filters on charge circuit are mounted on the pump special support.

Filters assembling
The suction filter is mounted on the suction line. Check that the pressure before the charge pump is 0.8 bar abs. *[11.6 PSI abs.]*, measured on the pump suction port (0.5 bar *[7.2 PSI]* for cold starting).

Viscosity range

For both max. efficiency and life of the unit, the operative viscosity should be chosen within the optimum range of:
√opt = optimum operating viscosity from 16 to 36 mm^2/s *[from 74.1 to 166.8 SUS]* referred to the closed loop temperature.

Working conditions: the following limits of viscosity apply
√min = 5 mm^2/s *[23 SUS]* short-duration at a max. permissible leakage oil temperature of 90° C *[194°F]*
√max = 1000 mm^2/s *[4 634 SUS]* short-duration, on cold start.

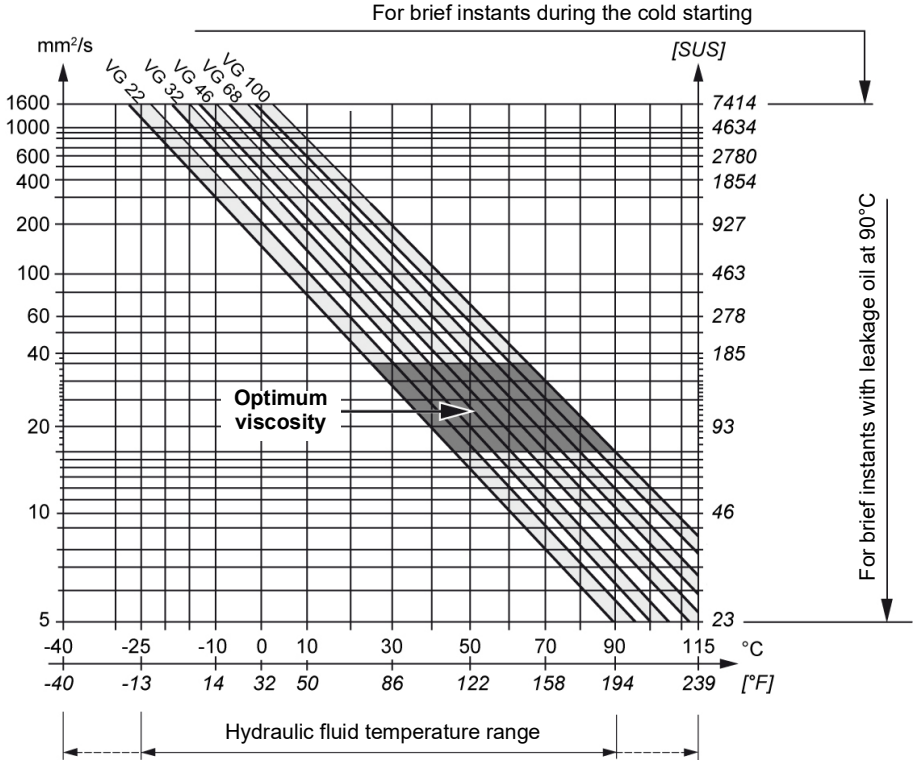

Ensure fluid temperature and viscosity limits are concurrently satisfied.

SYSTEM DESIGN PARAMETERS

Consult your Poclain Hydraulics application engineer to validate your design parameters before using the pump in your application.

Sizing equations

The following equations are helpful when sizing hydraulic pumps. Generally, the sizing process is initiated by an evaluation of the machine system to determine the required motor speed and torque to perform the necessary work function. First, the motor is sized to transmit the maximum required torque. The pump is then selected as a flow source to achieve the maximum motor speed.

SI units	**Output flow Q**	$= \frac{V_g.n.\eta_v}{1000}$			(l/min)
	Input torque M	$= \frac{V_g.\Delta_p}{20.\pi.\eta_m}$			(N.m)
	Input power P	$= \frac{M.\ n.\pi}{30\ 000}$	$= \frac{Q.\Delta_p}{600.\eta_t}$		(kW)
US units	**Output flow Q**	$= \frac{V_g.n.\eta_v}{231}$			*[GPM]*
	Input torque M	$= \frac{V_g.\Delta_p}{2.\pi.\eta_m}$			*[lbf.in]*
	Input power P	$= \frac{M.n.\pi}{198\ 000}$	$= \frac{Q.\Delta_p}{1714.\eta_t}$		*[hp]*

V_g=Displacement per revolution cm^3/tr *[in^3/rev]*
$\Delta p = p_o - p_i$ (system pressure) bar *[PSI]*
n = Speed min^{-1} *[rpm]*
η_v = Volumetric efficiency
η_m = Mechanical efficiency
η_t = Overall efficiency ($\eta v.\eta m$)


Redundant braking system requirement


Unintended vehicle or machine movement hazard.
The loss of hydrostatic drive line power, in any mode of operation (forward, neutral, or reverse) may cause the system to lose hydrostatic braking capacity. You must provide a braking system, redundant to the hydrostatic transmission, sufficient to stop and hold the vehicle or machine in the event of hydrostatic drive power loss.

Loop flushing

Closed circuit may require a flushing valve to meet temperature and cleanliness requirements. A flushing valve takes a part of hot fluid flow from the low pressure loop of the system loop for cooling and filtering.
Make sure that the charge pump provides adequate flow for the flushing valve flushing and the flushing valve does not cause charge pressure drop below recommended limits.

See option VS page 42 for more information.

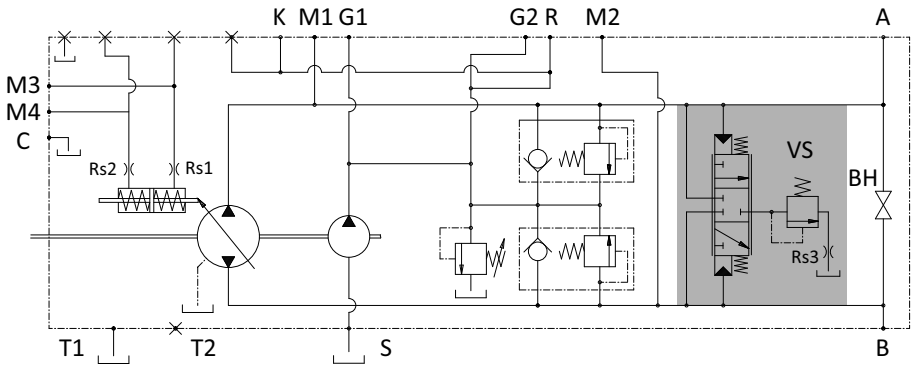



Reservoir

The reservoir provides clean fluid, dissipates heat, and removes entrained air from the hydraulic fluid. It allows for fluid volume changes associated with fluid expansion and cylinder differential volumes.
Minimum reservoir capacity depends on the volume needed to perform these functions. Typically, a capacity of one half the charge pump flow (per minute) is satisfactory for a closed reservoir. Open circuit systems sharing a common reservoir require greater fluid capacity.


Locate the reservoir outlet (suction line) near the bottom, allowing clearance for settling foreign particles. Use a 100 - 125 µm screen covering the outlet port.

Place the reservoir inlet (return lines) below the lowest expected fluid level, as far away from the outlet as possible.
Use a baffle (or baffles) between the reservoir inlet and outlet ports to promote de-aeration and reduce fluid surging.

Case drain usage for tandem pump


To ensure lubrification of both pumps (with only one charge pump), excess flow from the second pump charge relief valve must be routed into the housing of the first pump.

Tandem pumps with the option of opposing port endcaps do not follow the above rule.

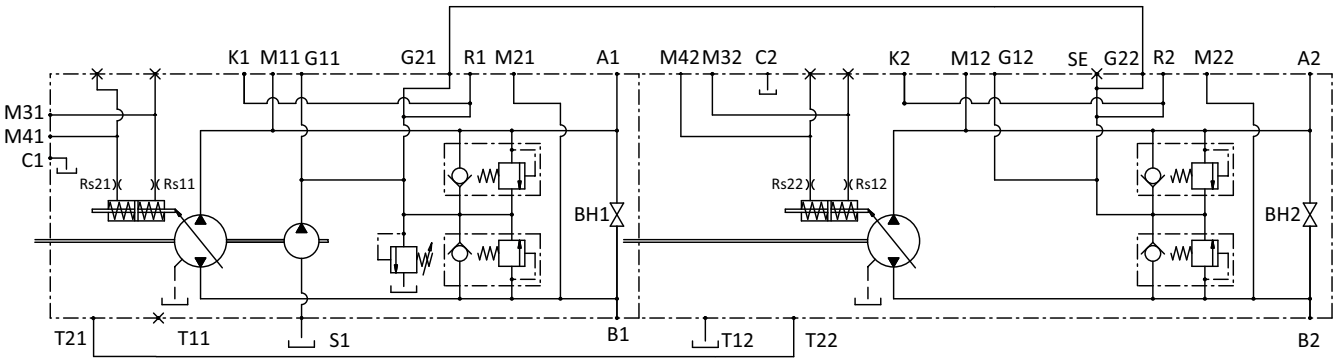

Differential pressure

The differential pressure is the High pressure relief valve setting minus Charge relief valve setting.

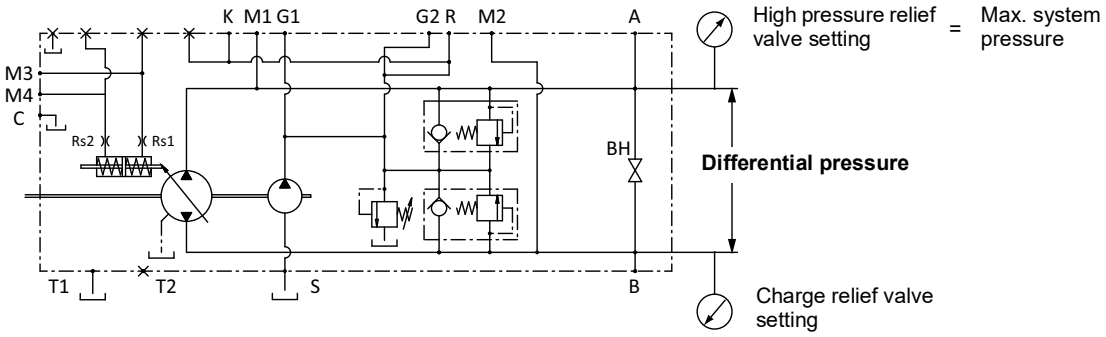

Bearing life and external shaft loading

Bearing life:
Bearing life is a function of speed, pressure , swashplate angle and external loads. Oil type and viscosity impact bearing life..

	Ball bearing life (B_{10} hours)	Roller bearing life (B_{10} hours)
PM30-25	32 400	61 000
PM30-28	23 000	44 000
PM30-30	18 700	35 000
PM30-35	11 800	22 000

Shaft Loads
Normal bearing life in B_{10} hours is shown in the above table. Figures have been calculated under the following operating conditions : A continuous differential pressure of 150 bar *[2 176PSI]*, 1 800 rpm shaft speed, maximum displacement, without any external shaft side load. The data is based on a 50% forward, 50% reverse duty cycle, standard charge pump size, and standard charge pressure.

PM50 pumps are designed with bearings that can accept external radial and thrust loads. The external radial shaft load limits depend on the load position, orientation, and operating conditions of the unit.

The maximum permissible radial load (Re), is based on the **maximum external moment (Me)**, and the **distance (L)** from the mounting flange to the load. It may be determined using the table and formula below. Thrust (axial) load limits are also shown.


Re = Me / L

All external shaft loads affect bearing life. In applications with external shaft loads, minimize the impact by positioning the load at 90° or 270° as shown in the figure.


Contact your Poclain Hydraulics representative for an evaluation of unit bearing life if:
• Continuously applied external loads exceed 25 % of the maximum allowable radial load Re.
• The pump swashplate is positioned on one side of center all or most of the time.
• The unit bearing life (B_{10}) is critical.

	External moment (Me) N.m *[in.lbf]* (Based on shaft deflection)	**Maximum shaft thrust** N *[lbf]* (at ΔP 180 bar *[2 611 PSI]* and 3 400 rpm)
PM30-25	150 *[1 328]*	1 500 *[337]*
PM30-28	107 *[947]*	1 500 *[337]*
PM30-30	76 *[673]*	1 500 *[337]*
PM30-35	-	1 500 *[337]*

Radial and thrust load position

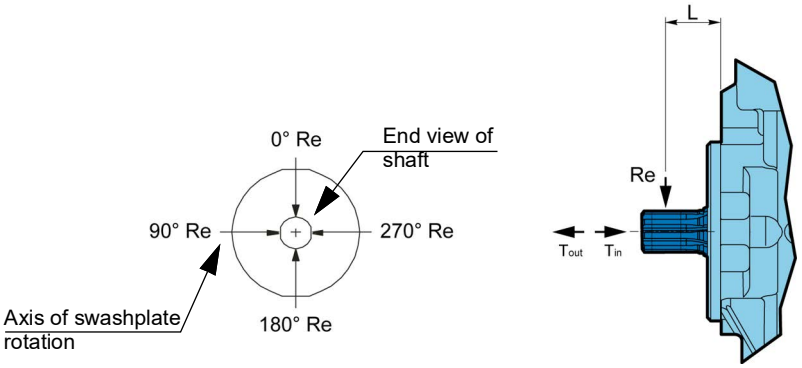

For an accurate calculation, consult your Poclain Hydraulics application engineer.



Hydraulic unit life

Hydraulic unit life is the life expectancy of the hydraulic components. It depends on speed and system pressure even if , system pressure is the dominant operating variable. High pressure, generated by high load, reduces hydraulic unit life.

Design the hydraulic system according to the expected machine duty cycle. Take in consideration the expected percentages of time at various loads and speeds. Ask your Poclain Hydraulics representative to calculate an appropriate pressure based your hydraulic system design. If duty cycle data is not available, input power and pump displacement are used to calculate system pressure.


All pressure limits are differential pressures (referenced to charge pressure) , taking a normal charge pressure in consideration.

PM30 pumps will meet satisfactory life expectancy if applied within the parameters specified in this technical documentation. For more detailed information on hydraulic unit life see Operating Parameters in page 9.

Mounting flange loads

Adding tandem mounted pumps, and/or tandem auxillary pump(s), subjecting pumps to shock loads may generate excessive loads on the front mounting flange. The overhung load moment for multiple pump mounting can be estimated as shown in the figure bellow

Overhung load example

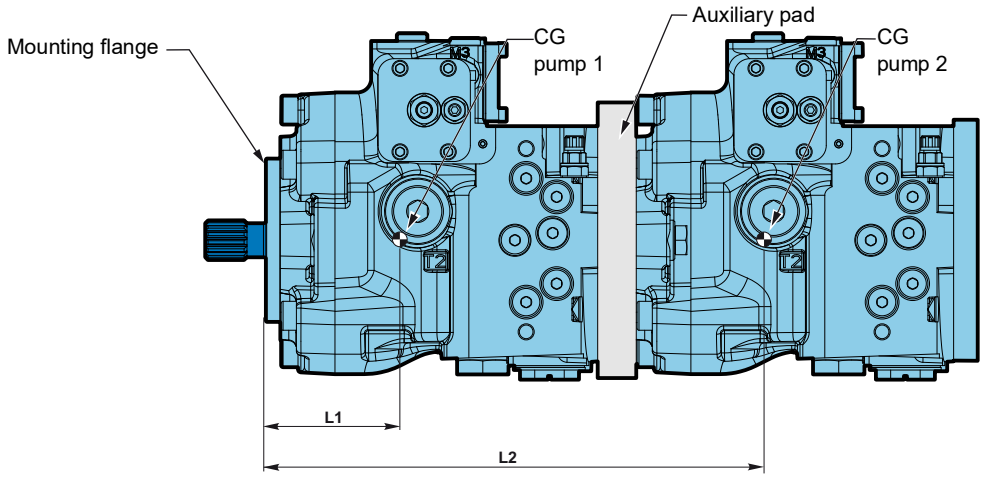

For two PM30 in tandem the approximate distances (exact values depend on pumps configuration) of gravity centers from front mounting flange are:
L1 = 109 mm *[4.29 inch]*
L2 = 331 mm *[13.03 inch]*

Estimating overhung load moments

W = Weight of pump (kg)
L = Distance from mounting flange to pump center of gravity (CG)
$M_R = G_R (W_1L_1 + W_2L_2 + ... + W_nL_n)$
$M_S = G_S (W_1L_1 + W_2L_2 + ... + W_nL_n)$

Where:
M_R = Rated load moment (N.m)
M_S = Shock load moment (N.m)
G_R*= Rated (vibratory) acceleration (G's) (m/sec²)
G_S*= Maximum shock acceleration (G's) (m/sec²)

*Calculations will be carried out by multiplying the gravity (g = 9.81 m/sec²) with a given factor. This factor depends on the application.

Allowable overhung load moment are shown in the above table. Exceeding these values requires additional pump support.

	Rated moment (MR) N.m *[in.lbf]*	Shock load moment (MS) N.m *[in.lbf]*
PM30-25	900 *[7 966]*	2 000 *[17 701]*
PM30-28	900 *[7 966]*	2 000 *[17 701]*
PM30-30	900 *[7 966]*	2 000 *[17 701]*
PM30-35	900 *[7 966]*	2 000 *[17 701]*

For an accurate values and calculations, consult your Poclain Hydraulics application engineer.

FEATURES

High pressure relief valve

The High pressure relief valves maintain circuit pressure in the proper range. The check valves allow charge flow to replenish the low pressure loop of the circuit. The high pressure relief valves ensure a high pressure protection of the high pressure loop of the circuit.


High pressure relief valves are available in a large range of settings. They are not adjustable.

When high pressure relief valves are not desired, pumps may be equipped with charge circuit check valves only.


High pressure relief valves are intended for transient overpressure protection and are not intended for continuous pressure control. Flow over relief valves for extended periods of time may result in severe heat build up. High flows over relief valves may result in pressure levels exceeding the nominal valve setting and potential damage to system components.


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
								↓						

Hight pressure relief valve	**Available setting** bar *[PSI]*	
Without	-	**00**
With	150 *[2 175]*	**15**
	200 *[2 900]*	**20**
	250 *[3 625]*	**25**
	300 *[4 351]*	**30**
	350 *[5 076]*	**35**
	370 *[5 366]*	**37**
	400 *[5 801]*	**40**
	420 *[6 092]*	**42**

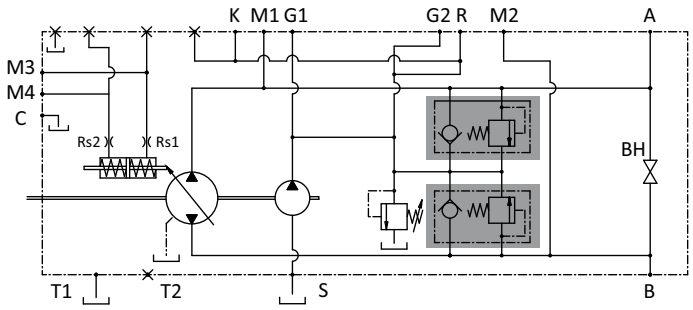


ISO VG46 hydraulic fluid at 50°C *[122°F]*

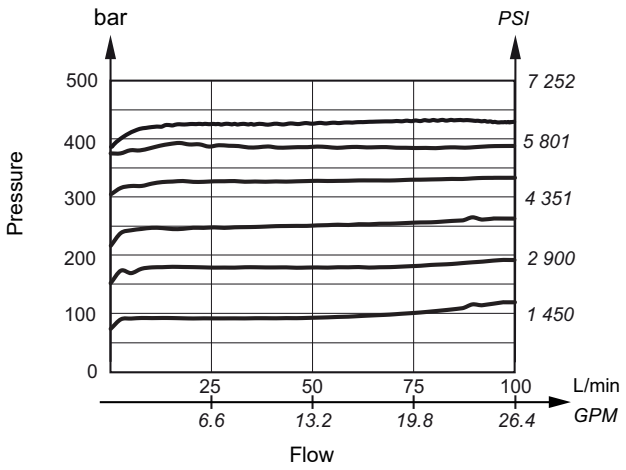

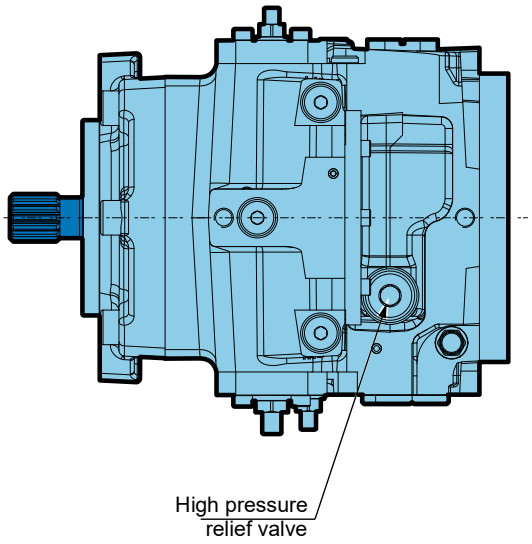

To check close loop pressure use ports M1-M2.



Charge relief valve


The charge pressure relief valve provides a relief outlet for charge circuit. This valve is used to set the charge pressure of the circuit. Flow through the valve is ported to case.


The nominal charge relief setting is referenced to case pressure.


Incorrect charge pressure settings may result in the inability to build required system pressure and/or inadequate loop flushing flows. Ensure correct charge pressure under all conditions of operation to maintain pump control performance.

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
										↓				

Charge relief valve	Available setting bar *[PSI]*	
Without	-	**00**
With	20 *[290*	**20**
With (standard)	25 *[363]*	**25**
With	30 *[435]*	**30**

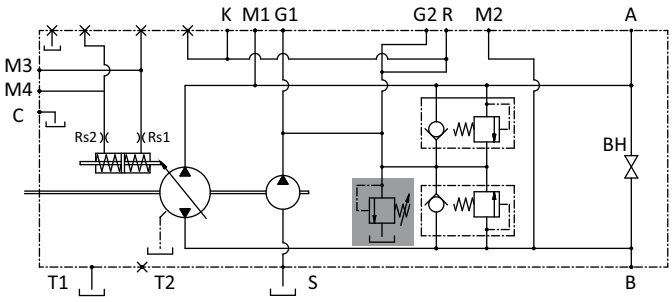

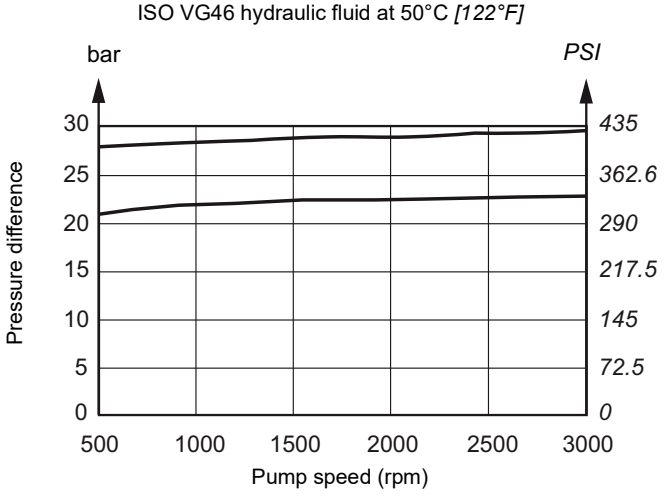


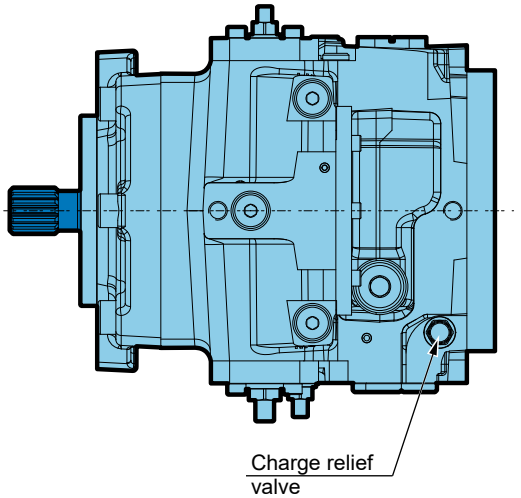

To check charge pressure use ports G1-G2.

Charge pump

Charge flow is required on all PM30 pumps used in closed circuit installations. The charge pump provides flow to make up internal leakage, maintain a positive pressure in the main circuit, provide flow for cooling and filtration, replace any leakage losses from external valving or auxiliary systems, and to provide flow and pressure for the control system.
Many factors influence the charge flow requirements. These factors include system pressure, pump speed, pump swashplate angle, type of fluid, temperature, size of heat exchanger, length and size of hydraulic lines, control response characteristics, auxiliary flow requirements, hydrostatic motor type, etc.
Unusual application conditions may require a more detailed review of charge pump sizing. Charge pressure must be maintained at a specified level under all operating conditions to prevent damage to the transmission. Poclain Hydraulics recommends testing under actual operating conditions to verify this.

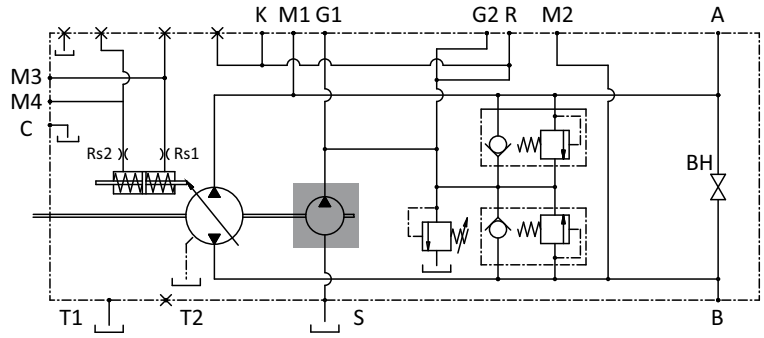


Charge pump sizing / selection

In most applications a general guideline is that the charge pump displacement should be at least 20% of the main pump displacement.

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11

Charge pump	Displacement cm³/rev *[in³/rev]*	Rated speed (rpm)	
Without	-	-	**00**
With	8 *[0.49]*	3600	**08**
	11 *[0.67]*	3600	**11**
	15,8 *[0.96]*	3600	**16**


Contact your Poclain Hydraulics application engineer for more information.





Without charge pump

	1	2	3	4	5	6	7	8	9	10	11
P	M	3	0					00	S		

The external charge flow must be the same that the internal charge pump flow and connect with port S.

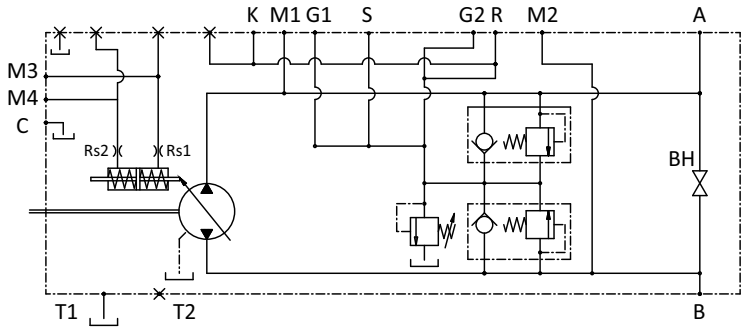

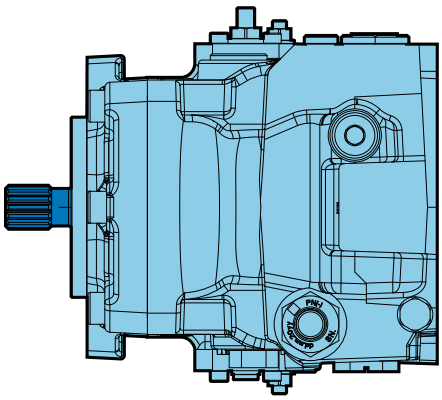

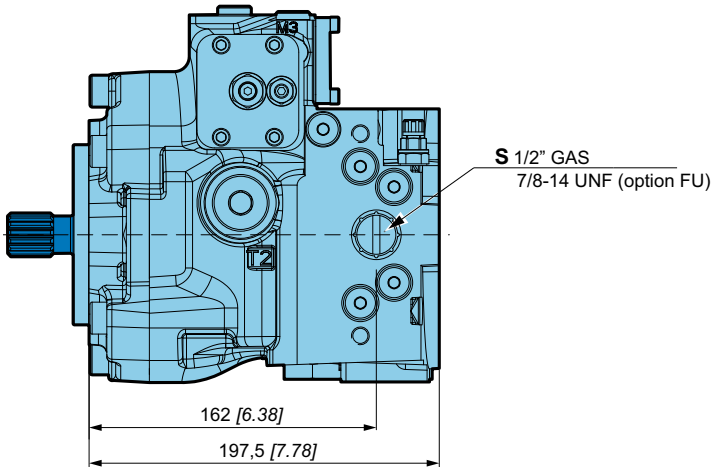


Displacement limiters

PM30 are designed with mechanical displacement (stroke) limiters. You can limit maximum displacement of the pump to a certain per-cent of its maximum displacement to near zero in both direction.


The displacement limiters are located on the both sides of the servo piston and are adjustable by screw. On request the setting of the max. displacements can be different, in this case two values must be indicated in order code (first for port A).


Take care in adjusting displacement limiters to avoid an undesirable condition of output flow or speed. Retorque the sealing lock nut after every adjustment to prevent an unexpected change in output conditions and to prevent external leakage during pump operation.

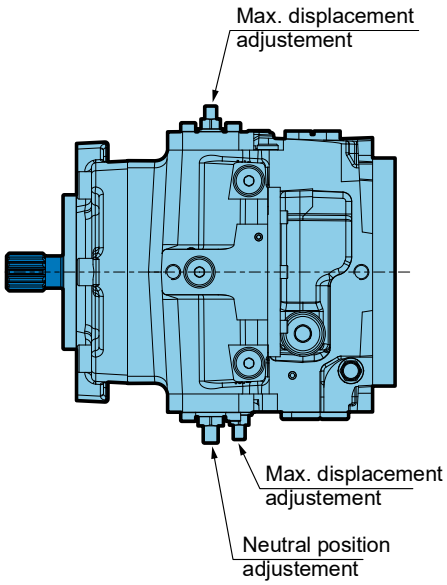

By-pass


PM30 features a by-pass function. By-passing Port A and Port B is achieved by unscrewing a screw located on the cover. The by-pass connect the ports A-B and must be use only in emergency case and only for short movement.

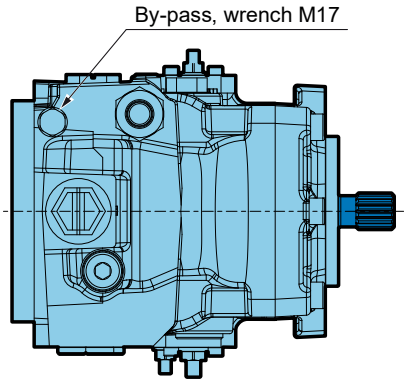

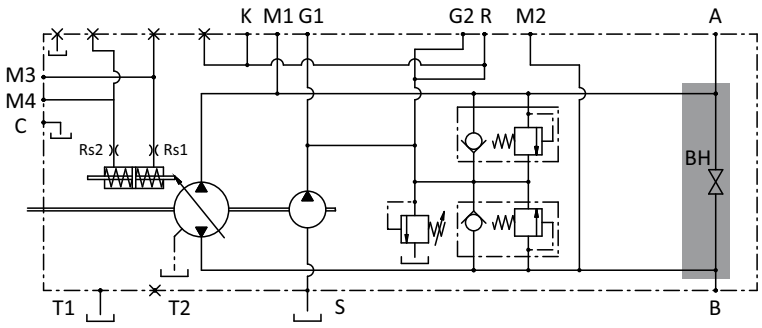


To avoid leakage, do not exceed two turns of the screw.

By-pass valve is intended for moving a machine for very short distances at very slow speeds. It is not intended as tow valve.




Mounting flange and shafts

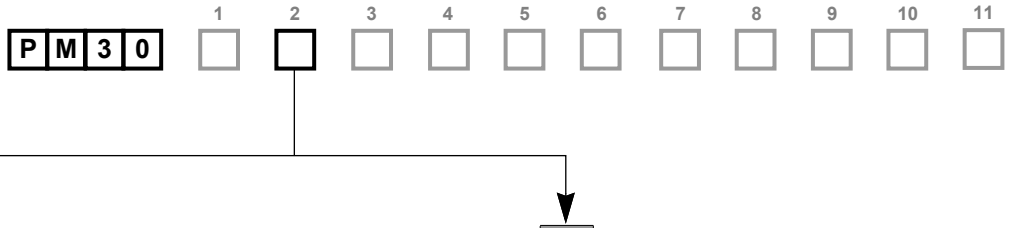

S3 SAE B - Splined shaft


13 teeth; Max. torque: 220 Nm *[1947 in.lbf]*

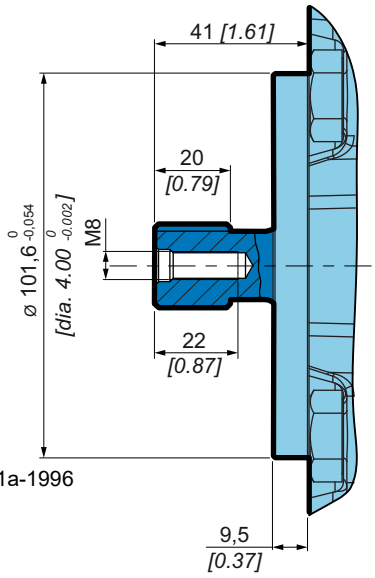

Splined ANSI B92.1a-1996
Pitch 16/32" DP
Pressure angle 30°
Tolerance class: 5

S4 SAE BB - Splined shaft (standard)


15 teeth; Max. torque: 360 Nm *[3186 in.lbf]*

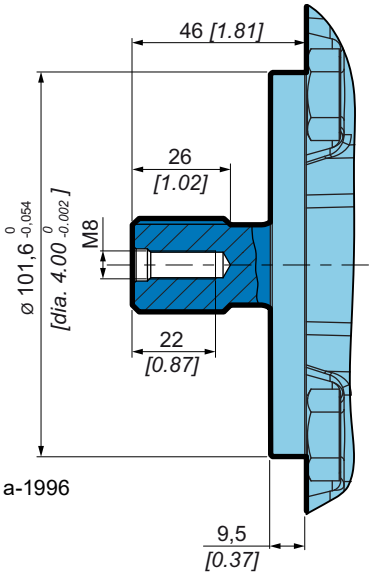

Splined ANSI B92.1a-1996
Pitch 16/32" DP
Pressure angle 30°
Tolerance class: 5

Fundamental dimensions for coupling assembly

To avoid the contact between rotating and fixed parts the below dimensions for coupling must be observed.

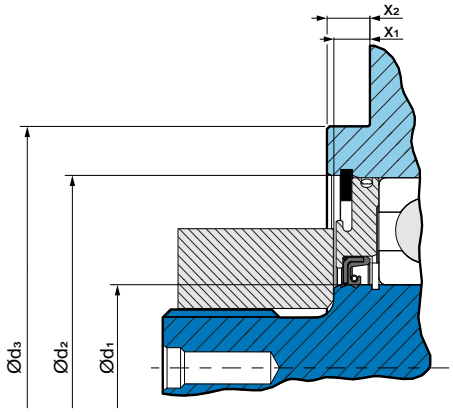

Size	$Ød_1$	$Ød_2$	$Ød_3$	x_1	x_2
PM30	30 *[1.18]*	$73^{+0,1}$ *[2.87 +0.004]*	101,6 *[3.99]*	8 *[0.31]*	$9_{-0,1}$ *[0.35 -0.004]*

For precise info regarding coupling assembly contact your Poclain Hydraulics application engineer.

Auxiliary mounting pad

SAE A flanges


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11

Flange type	Number of teeth	Pitch	Max. torque *N.m [in.lbf]*	
SAE A	9	5/8" pitch 16/32" DP	80 *[708]*	A
	11	3/4" pitch 16/32" DP	160 *[1 416]*	E

00	Without charge pump


8	With charge pump: 8,0 cm^3/rev *[0.49 in^3/rev]*
11	With charge pump: 11,0 cm^3/rev *[0.67 in^3/rev]*
16	With charge pump: 15,8 cm^3/rev *[0.96 in^3/rev]*

Splined ANSI B92.1a-1996
Pressure angle 30°
Tolerance class: 5

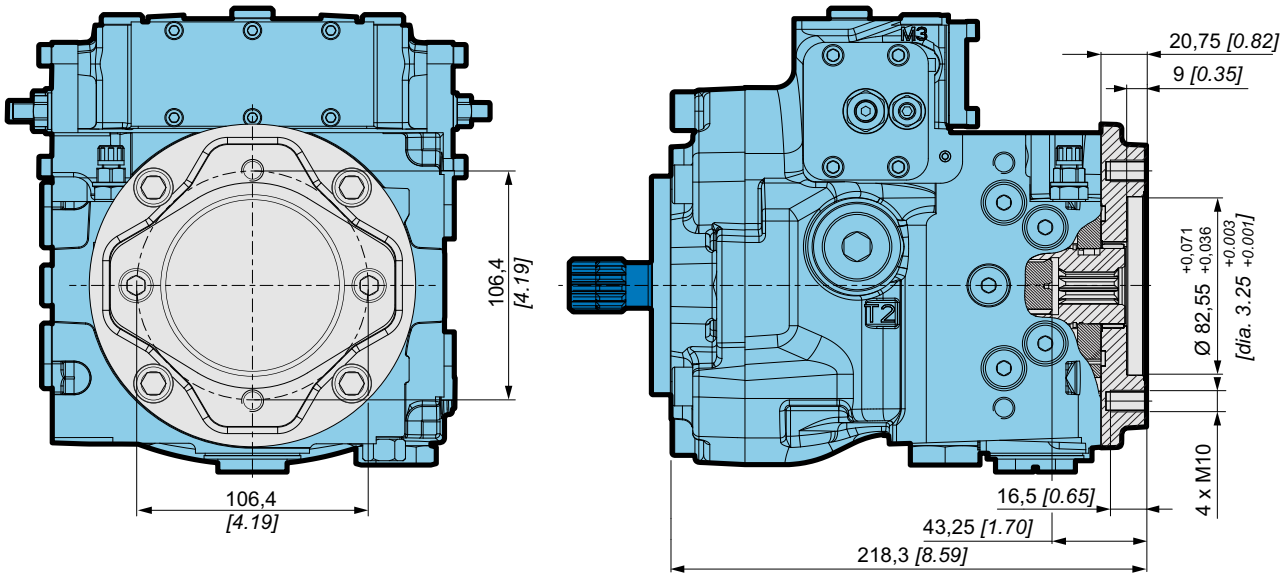

O-ring: OR-1.78-82.27-NBR70
P/N: 24OR-42

Do not rotate the thru shaft cover.




SAE-B and SAE-BB flanges

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11

Flange type	Number of teeth	Pitch	Max. torque N.m [in.lbf]	
SAE B	13	7/8'' pitch 16/32'' DP	220 *[1 950]*	**B**
SAE BB	15	1'' pitch 16/32'' DP	360 *[3 186]*	**C**

00	**Without charge pump**
8	**With charge pump: 8,0 cm^3/rev *[0.49 in^3/rev]***
11	**With charge pump: 11,0 cm^3/rev *[0.67 in^3/rev]***
16	**With charge pump: 15,8 cm^3/rev *[0.96 in^3/rev]***


Splined ANSI B92.1a-1996
Pressure angle 30°
Tolerance class: 5

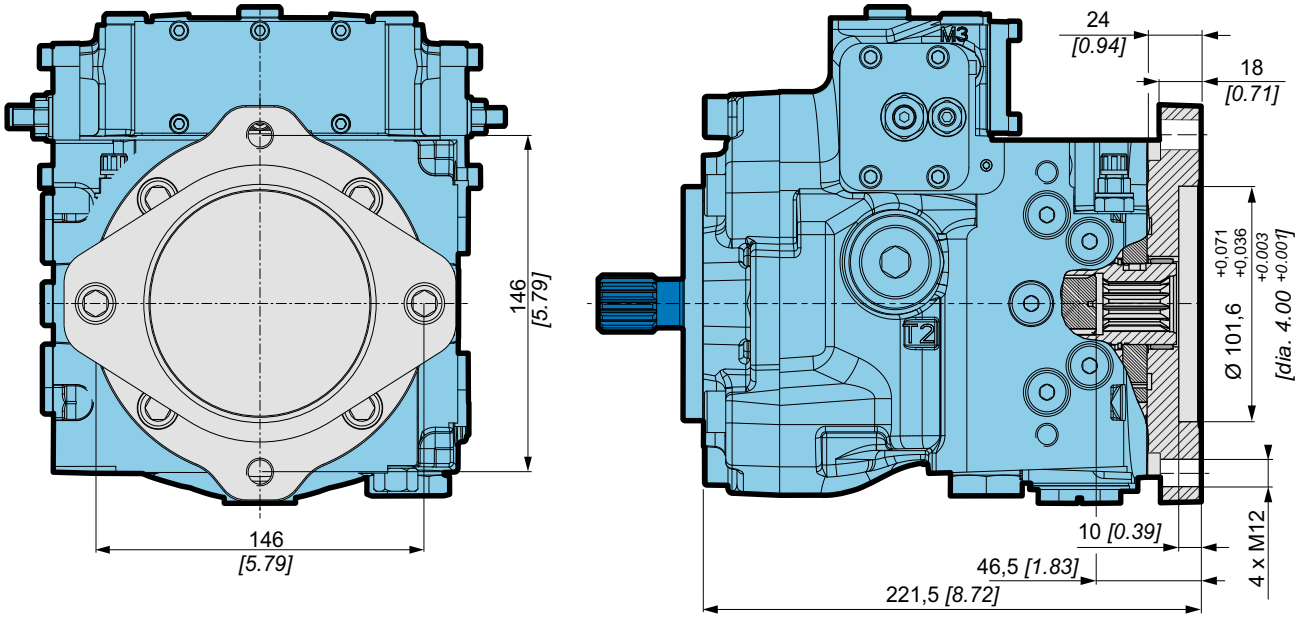

O-ring: OR-1.78-101.32-NBR70
P/N: A47888C

Do not rotate the thru shaft cover.

Tandem pumps

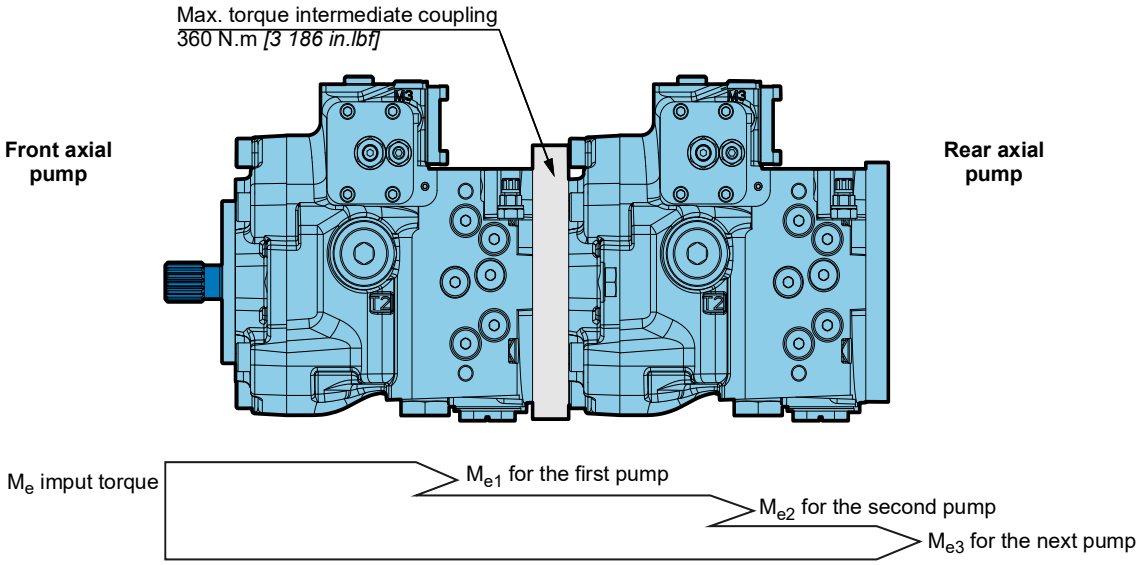


M_e imput torque
M_{e1} for the first pump
M_{e2} for the second pump
M_{e3} for the next pump

Torque required by auxiliary pumps is additive.
Ensure requirements don't exceed shaft torque ratings.

	1	2	3	4	5	6	7	8	9	10	11
Front axial pump	P	M	3	0									
+													
Rear axial pump	P	M	3	0		S4							


Number of charge pump in the tandem	Axial pump	Mounting flange and shaft		Charge pump	Auxiliary mounting flange			Total axial lenght mm *[inch]*
0 charge pump	Front	SAE BB; 15 teeth	S4	Without	00	Tandem fitting	T	
	Rear	SAE BB; 15 teeth	S4	Without	00	Without fitting	S	419,0 *[16.49]*
						SAE A; 9 teeth	A	439,8 *[17.31]*
						SAE A; 11 teeth	E	439,8 *[17.31]*
						SAE B; 13 teeth	B	443 *[17.44]*
						SAE BB; 15 teeth	C	443 *[17.44]*
1 charge pump	Front	SAE BB; 15 teeth	S4	With	08 or 11 or 16	Tandem fitting	T	
	Rear	SAE BB; 15 teeth	S4	Without	00	Without fitting	S	419,0 *[16.49]*
						SAE A; 9 teeth	A	439,8 *[17.31]*
						SAE A; 11 teeth	E	439,8 *[17.31]*
						SAE B; 13 teeth	B	443 *[17.44]*
						SAE BB; 15 teeth	C	443 *[17.44]*
2 charge pumps	Front	SAE BB; 15 teeth	S4	With	08	SAE BB; 15 teeth	C	
	Rear	SAE BB; 15 teeth	S4	With	11 or 16	Without fitting	S	419,0 *[16.49]*
						SAE A; 9 teeth	A	439,8 *[17.31]*
						SAE A; 11 teeth	E	439,8 *[17.31]*
						SAE B; 13 teeth	B	443 *[17.44]*
						SAE BB; 15 teeth	C	443 *[17.44]*


Gear pumps are always delivered flanged on the axial pump. They can not be sold alone.



Example of tandem configuration with 1 charge pump

		1	2	3	4	5	6	7	8	9	10	11
Front axial pump	P M 3 0		S4							T		
+												
Rear axial pump	P M 3 0		S4						00	S		

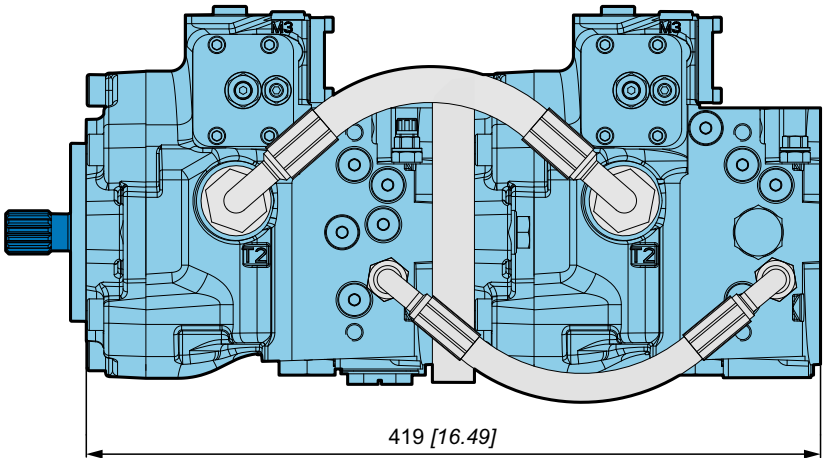


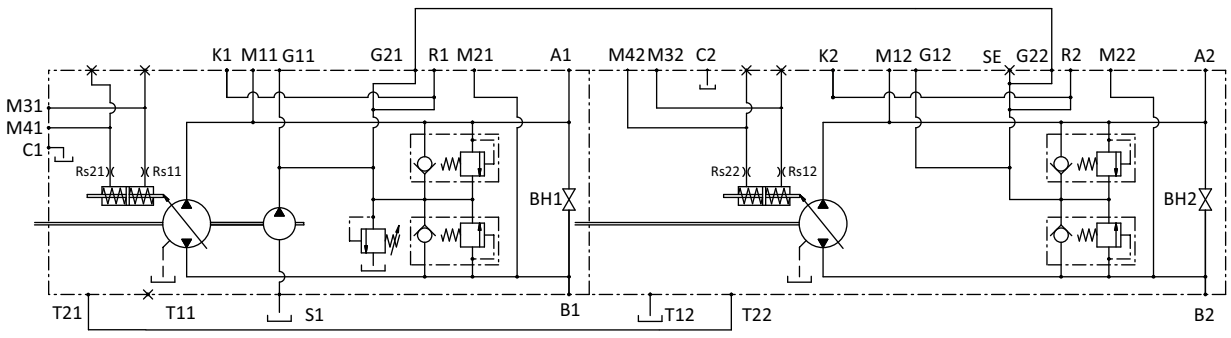


Ports T and G of the first pump must be connectedwith ports T and G of the second pump.

Example of tandem configuration with 2 charge pumps

		1	2	3	4	5	6	7	8	9	10	11
Front axial pump	P M 3 0		S4							C		
+												
Rear axial pump	P M 3 0		S4							S		

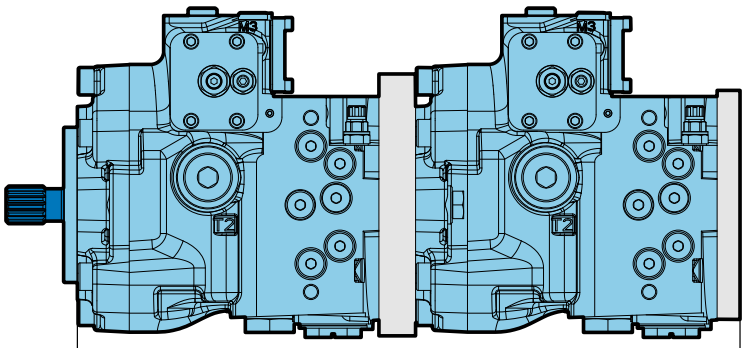


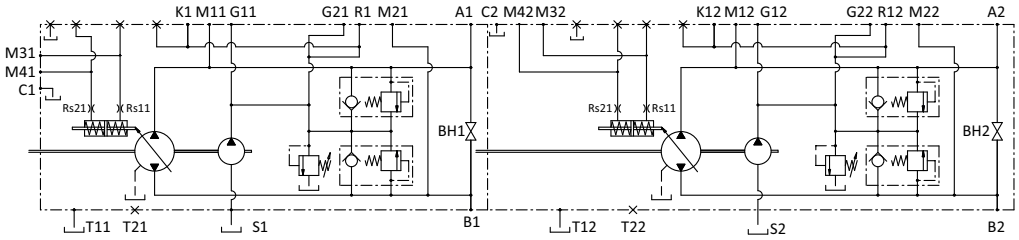

Gear pumps


		1	2	3	4	5	6	7	8	9	10	11
	P M 3 0									A		

SAE A flange

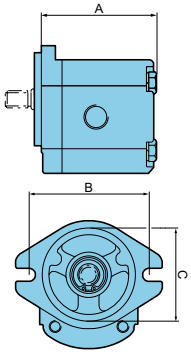

	Displacement	Pressure			Dimension			Mass	Efficiency
		Continuous max. pressure	Max. intermittent pressure	Max. peak pressure	A	B	C		
	cm^3/rev *[cu.in/rev]*	bar *[PSI]*	bar *[PSI]*	bar *[PSI]*	mm *[in]*	mm *[in]*	mm *[in]*	Kg *[lb]*	%
04	4,0 *[0.24]*	250 *[3 625]*	270 *[3 915]*	290 *[4 205]*	93 *[3.66]*			2,30 *[5.07]*	
06	6,0 *[0.37]*	250 *[3 625]*	270 *[3 915]*	290 *[4 205]*	96,3 *[3.79]*			2,45 *[5.40]*	
08	8,5 *[0.52]*	250 *[3 625]*	270 *[3 915]*	290 *[4 205]*	100,5 *[3.96]*			2,60 *[5.73]*	
11	11,0 *[0.67]*	250 *[3 625]*	270 *[3 915]*	290 *[4 205]*	104,6 *[4.12]*			2,70 *[5.95]*	
14	14 *[0.85]*	250 *[3 625]*	270 *[3 915]*	290 *[4 205]*	109,6 *[4.31]*	101,6 *[3.99]*	82,5 *[3.25]*	2,80 *[6.17]*	95*
17	16,5 *[1.00]*	230 *[3 335]*	240 *[3 480]*	250 *[3 625]*	113,8 *[4.48]*			2,95 *[6.51]*	
20	19,5 *[1.19]*	210 *[3 045]*	220 *[3 190]*	230 *[3 335]*	118,8 *[4.68]*			3,10 *[6.84]*	
23	22,5 *[1.37]*	190 *[2 755]*	200 *[2 900]*	210 *[3 045]*	123,8 *[4.87]*			3,25 *[7.17]*	
26	26 *[1.59]*	170 *[2 465]*	180 *[2 610]*	190 *[2 755]*	129,6 *[5.10]*			3,40 *[7.50]*	

* Value collected during the testing at 1500 rpm



CONTROLS


Mechanical servo control with feedback


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						A								


Control function	The variation in pump displacement is reached by control lever rotation to adjust hydraulic servo piston position. Control lever range is 40°. Movement of control lever is independent of the pressure and pump speed.
Control regulation	To avoid sudden accelerations and stoppages, two restrictors (Rs1 and Rs2) are inserted between servo control and hydraulic servo piston. They are used to regulate control shifting speed.
Feedback function	The feedback system between swash plate and hydraulic servo piston permit to maintain costant displacement of the pump if the pressure between pump and hydraulic motor changes. The feedback function is reached by a lever that connects the swashplate and the hydraulic servo piston.

Flow rate determination

Rotation	Control	Output	Input
Clockwise (R)	X	A	B
	Y	B	A
Counter clockwise (L)	X	B	A
	Y	A	B

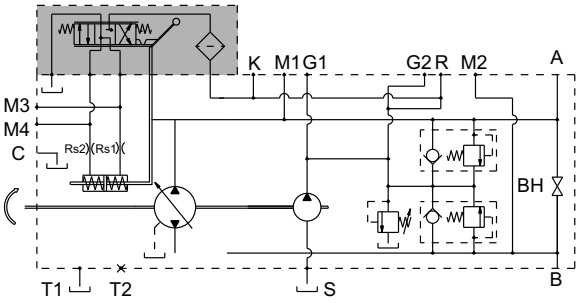


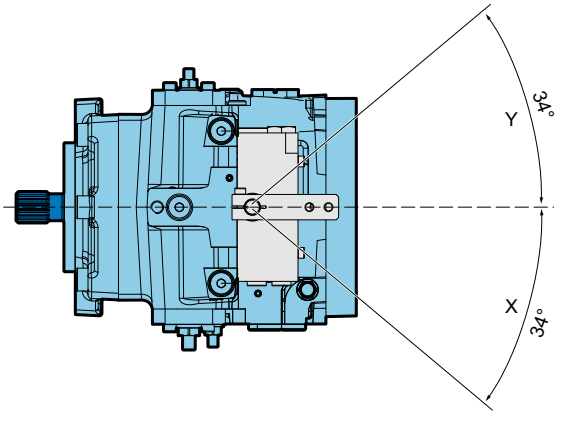


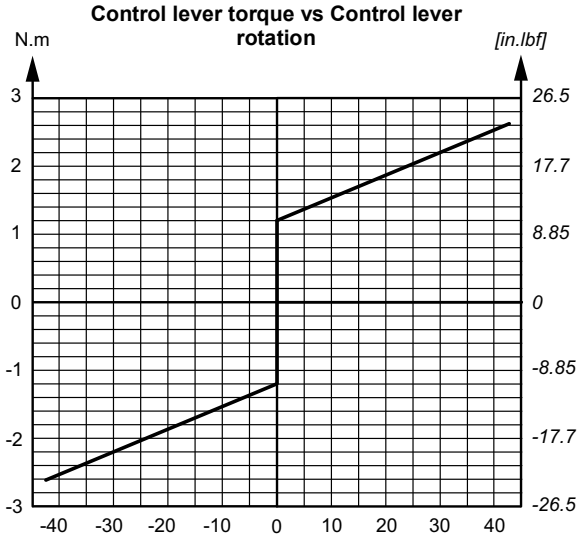

The spring return feature in the control unit is not a safety device.


Dimensions with control A

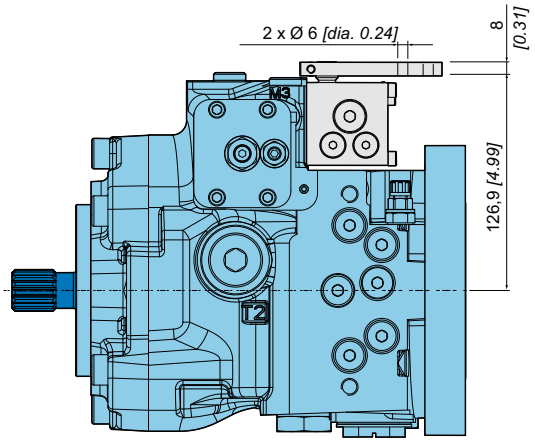

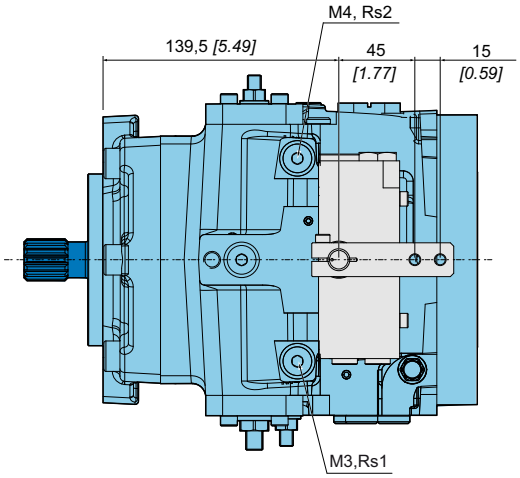

See option MI (page 43) to add neutral position switch.

See page 6 for port characteristics and page 7 for other dimensions.



Hydraulic servo control

	1	2	3	4	5	6	7	8	9	10	11
P M 3 0			S								

Control function	The variation in pump displacement is reached by pressure adjustment on the M3 and M4 servo control ports. These ports are controlled by hydraulic proportional joystick (containing pressure reduction valves). The joystick supply can by obtained by taking pressure from the auxiliary pump (R connection). Basic joystick can be provided upon request.
Control regulation	The servo control response time can be adjusted by two restrictors (Rs1 and Rs2) inserted on the joystick supply line (from 0,6 to1,2 mm *[from 0.02 to 0.05 in]*). The servo control operation pressure curve in both control directions goes from 4,5 to 15 bar *[from 65 to 218 PSI]*. The adjustment curve of the hydraulic control system has to be wider, from 4 to 16 bar *[from 58 to 232 PSI]*.


Other curves can be used in relation to valve plate timing. Contact your Poclain Hydraulics application engineer for further info.

For the selection of the regulation curve (with or without step) of the Joystick contact your Poclain Hydraulics application engineer.

.

Flow rate determination

Rotation	M3	M4
Clockwise (R)	A	B
Counter clockwise (L)	B	A

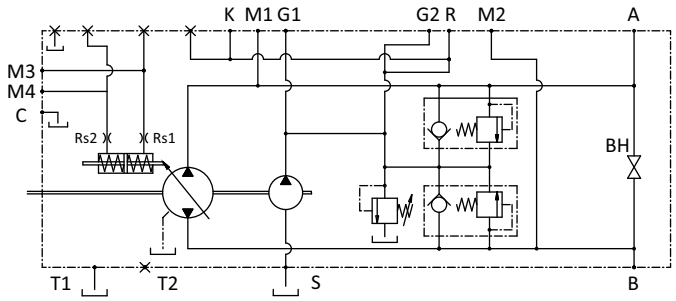


The spring return feature in the control unit is not a safety device.

Hydraulic joystick can be with or without step.


The back pressure of the return line of the joystick and the drive line of the pump have an influence on Servo pressure vs Displacement values.

Servo pressure vs Displacement

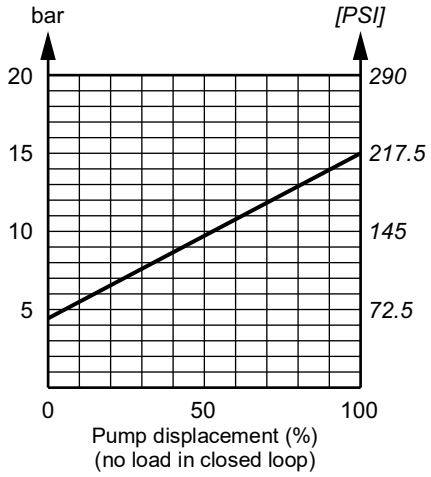

Above graph is just an example that shows the relationship between servo pressure and displacement.

Dimensions with control S

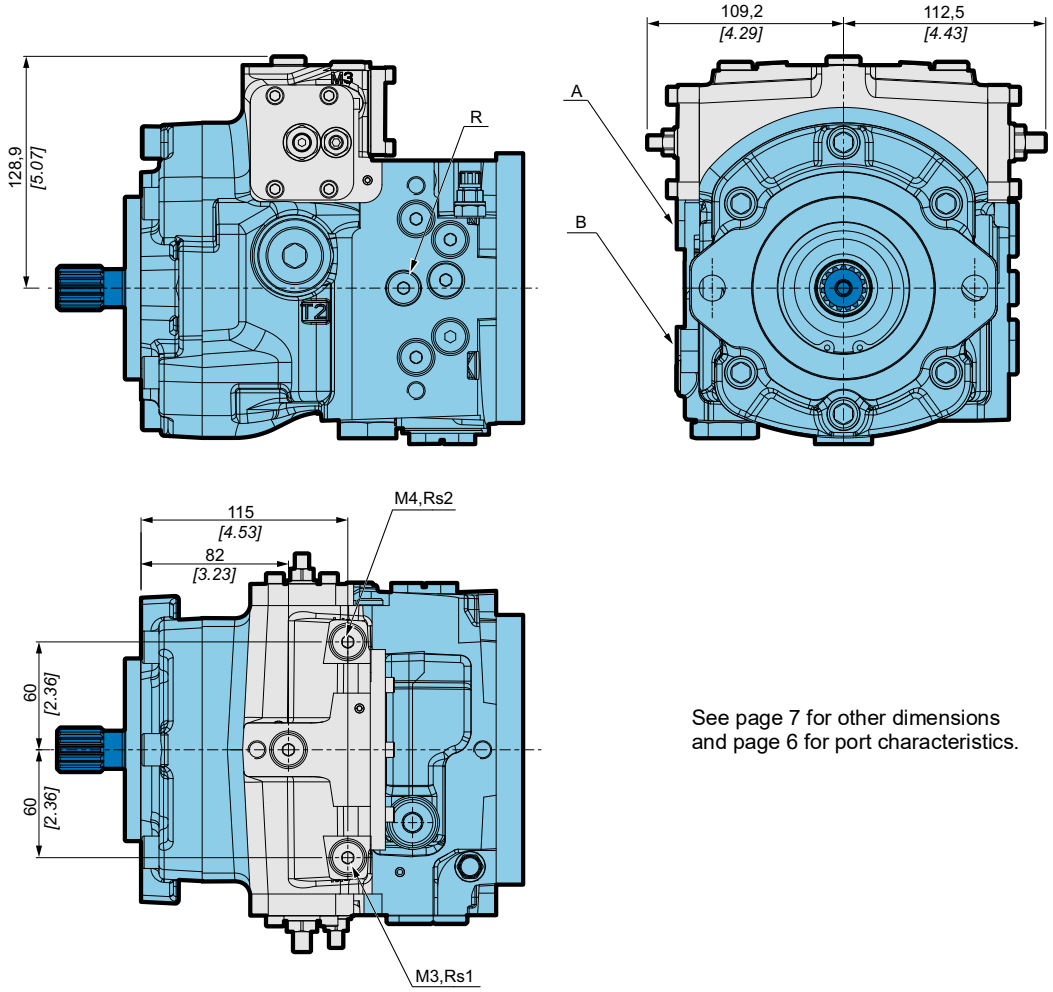


See page 7 for other dimensions
and page 6 for port characteristics.

Hydraulic servo control with feedback

1	2	3	4	5	6	7	8	9	10	11
P	M	3	0	☐	☐	T	☐	☐	☐	☐	☐	☐


Control function	The variation in pump displacement is reached by pressure adjustment on the M5 and M6 feedback control ports. These ports are controlled by hydraulic proportional joystick (containing pressure reduction valves). The joystick supply can by obtained by taking pressure from the auxiliary pump (R connection). Basic joystick can be provided upon request.
Control regulation	The servo control operation curve in both directions goes from 6 to 15 bar *[from 87 to 218 PSI]*. The adjustment curve of the hydraulic control system has to be wider, from 5 to 16 bar *[from 73 to 232 PSI]*.
Feedback function	The feedback system between swash plate and hydraulic servo piston permit to maintain constant displacement of the pump if the pressure between pump and hydraulic motor changes. The feedback function is reached by a lever that connects the swashplate and the hydraulic servo piston. To avoid sudden accelerations and stoppages, two restrictors (Rs1 and Rs2) are inserted between the servo control and the hydraulic servo piston.


Contact your Poclain Hydraulics application engineer in case of special needs of the control.

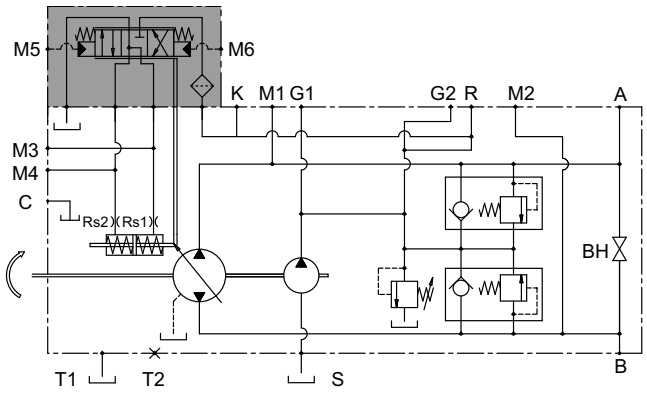


Hydraulic joystick can be with or without step.

Dimensions with control T

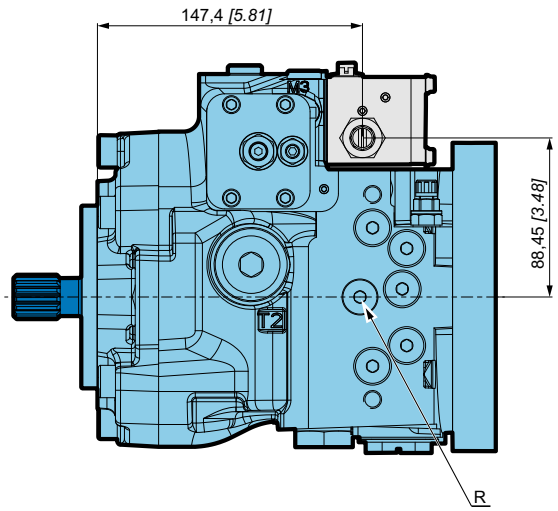

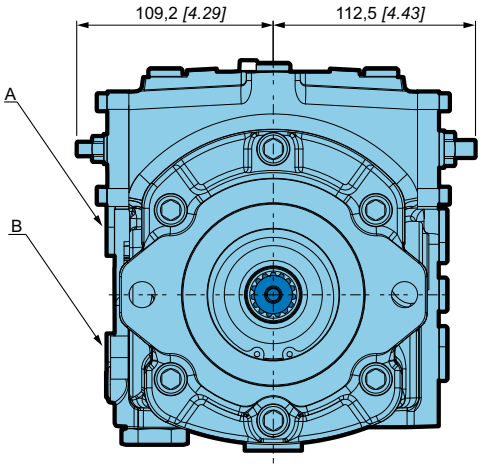

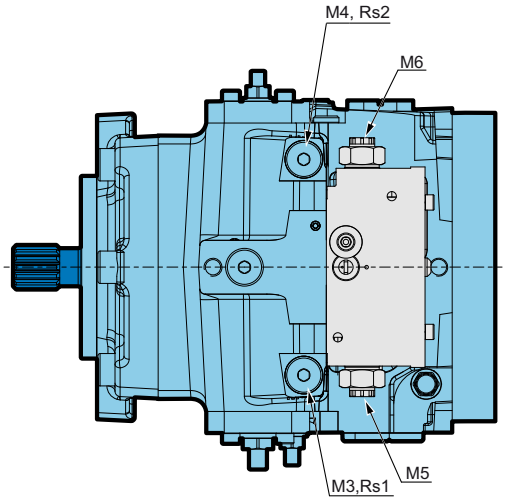

See page 7 for other dimensions
and page 6 for port characteristics.

Hydraulic automotive control


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						☐								

Control function	The variation in pump displacement is reached by continuous electro-hydraulic valve adjustment. The adjustment is precised by pilot pressure controlled by solenoid control. The pilot pressure increases proportionally to the rotation of the pump. The pump displacement increases corresponding to the higher pilot pressure.
Control regulation	In case the engine is overloaded, the rotation rate decreases and the pilot pressure is reduced causing a pump displacement reduction with a corresponding drop in absorbed power.
Inching function	Inching function is reached by reduction of the pilot pressure, independently of the pump rotation speed (see option IC on page 39). Consequently the pump displacement is reduced.

Supply voltage	
12V	**D12**
24V	**D24**

Flow rate determination


Rotation	Pressure	Output	Input
Clockwise (R)	EV1	B	A
	EV2	A	B
Counter clockwise (L)	EV1	A	B
	EV2	B	A

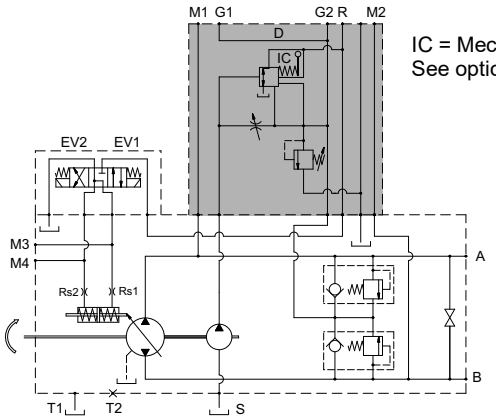

IC = Mechanical inching.
See option IC page 41.


The power and torque curve of the engine are necessary for automotive setting.

Dimensions with control D and mechanical inching

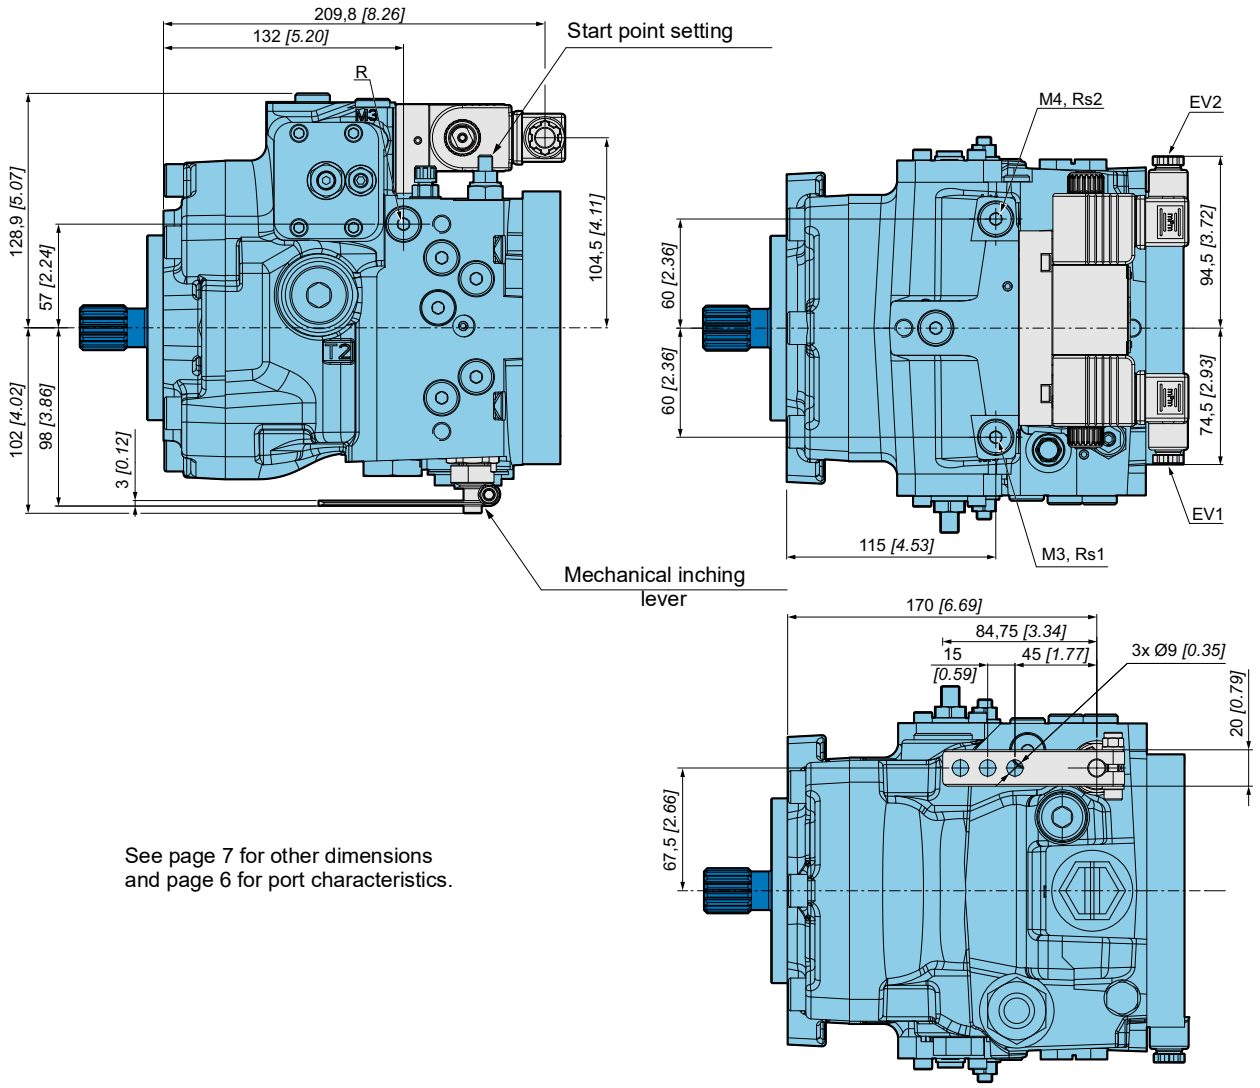

See page 7 for other dimensions
and page 6 for port characteristics.

IC rotation angle controls pump destroke. Angle of regulation is 25º.



Electrical on-off servo control


Control with return spring

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						☐								

Control function	The change in pump displacement is reached by activation of an ON-OFF electrovalve with closed CETOP 2 connection. If the electrovalve motion is stopped, the pump goes back to neutral position due to the hydraulic servo piston return springs.
Control regulation	The displacement reached is defined by the starting time of the electrovalve and by diameter of restrictors (Rs1 and Rs2) inserted between the electrovalve and the hydraulic servo piston. The pump can be supplied either without electrovalve (B00) or with electrovalve (B12 / B24).


Supply voltage	
Without	**B00**
12V	**B12**
24V	**B24**


Without electrovalve

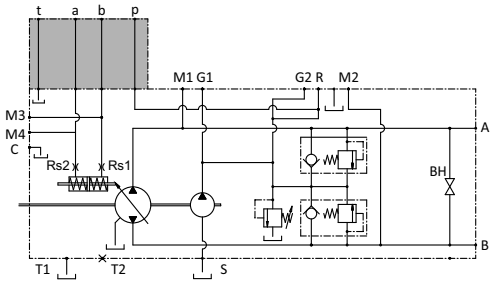


With electrovalve

The center of the on-off electrovalve is open.

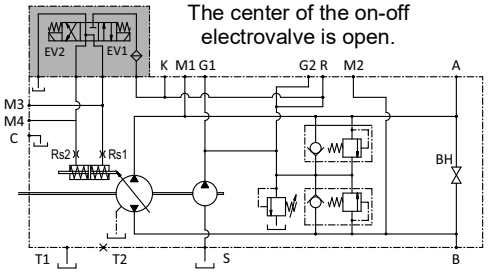


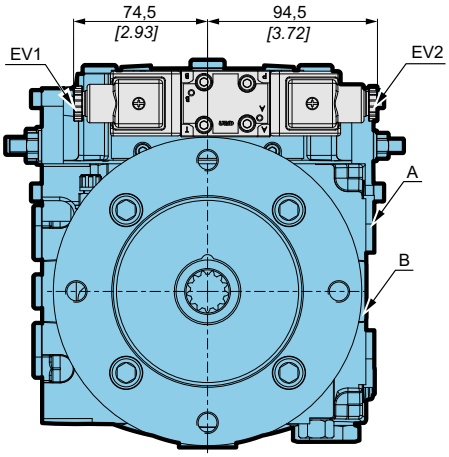

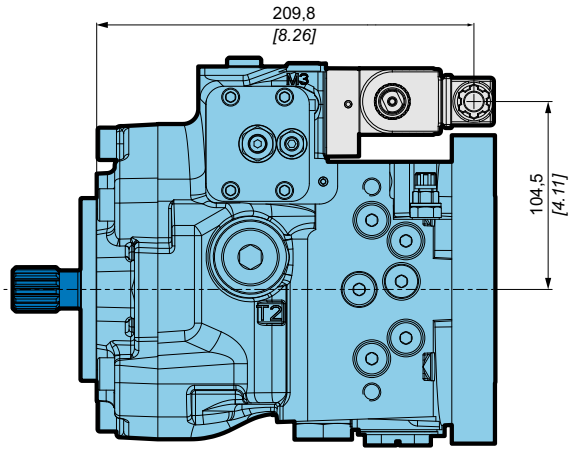

See page 7 for other dimensions and page 6 for port characteristics.

Solenoids specification		
Operating voltage	12 VDC ± 10%	24 VDC ± 10%
Resistance at 20°C *[68°F]*	5,3 Ω ± 7%	21,2 Ω ± 7%
Connector type	DIN 43650	
Nominal power	27 W	
Protection	IP65	
Mass	0,215 kg *[0.47 lb]*	

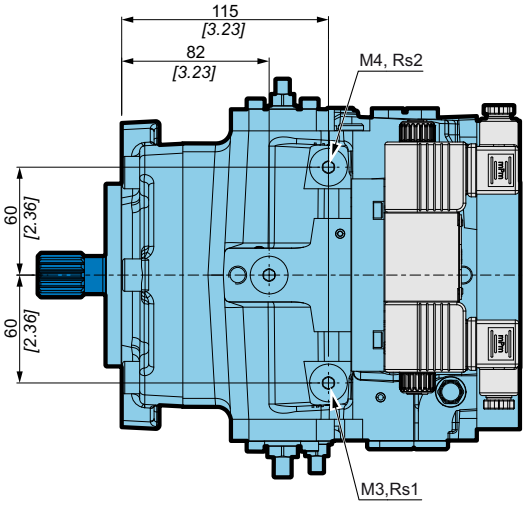

Electro-proportional servo control

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						↓								


Supply voltage

12V	**P12**
24V	**P24**

Control function	The variation in pump displacement is reached by current adjustment applied to proportional valve coils. The coils then adjust the pressure of the servo control connected to the hydraulic servo piston. The flow rate direction depends on activated coil.
Control regulation	The reaction time can be controlled by ramps installed on the card and by restrictors (Rs1 and Rs2) positioned between the electrovalves and the hydraulic servo piston.
Automotive function	Electro-proportional servo control combined with ECU unit and appropriate software can be used for Higher performances Automotive control.

Flow rate determination

Rotation	EV1	EV2
Clockwise (R)	A	B
Counter clockwise (L)	B	A

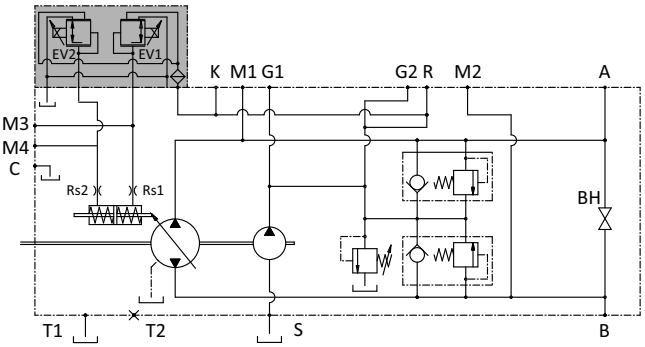



Valve plate timing and regulation curve of proportional valve influence the flow. Contact your Poclain Hydraulics application engineer for further info.

The current must not exceed 1500 mA under 12V and 800 mA under 24V.


The spring feature in the control unit is not a safety device.


Electrovalve current vs Displacement

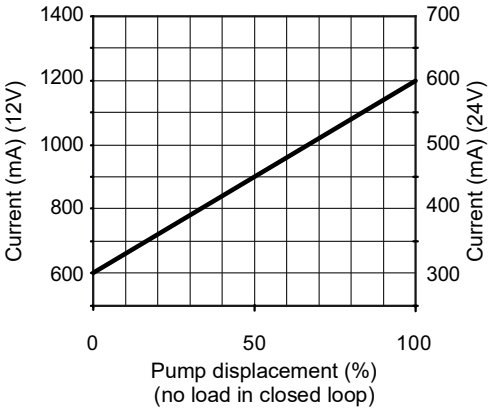




Dimensions with control P

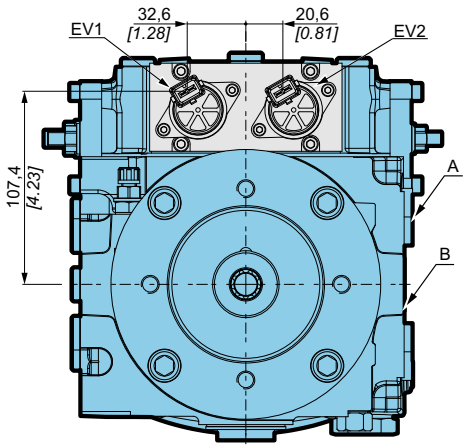

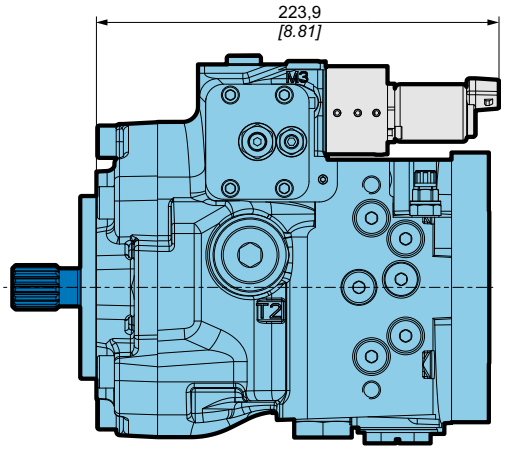

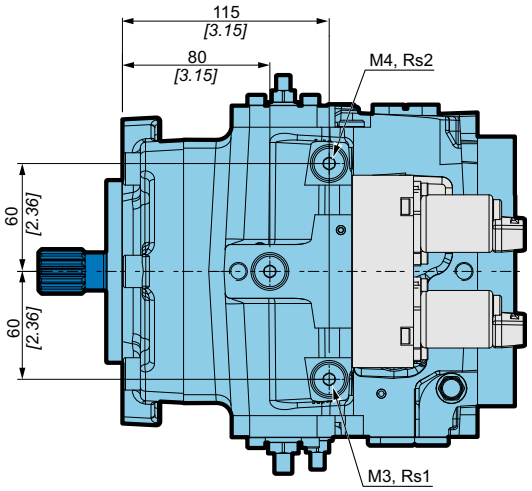

See page 7 for other dimensions and page 6 for port characteristics.


Solenoids specification		
Operating voltage	12 VDC	24 VDC
Current	1500 mA	750 mA
Resistance at 20°C *[68°F]*	5,3 Ω ± 5%	21,2 Ω ± 5%
Connector type	AMP Junior Timer, Deutsch DT04-2P	
Protection	IP6K6 / IPX9K	


Electro-proportional servo control with feedback


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						↓								

Control function	The variation in pump displacement is reached by current adjustment applied to electro-proportional coils. The coils then adjust the pressure of the servo control. The flow rate direction depends on activated coil.
Control regulation	The reaction time can be controlled by ramps installed on the card and by restrictors (Rs1 and Rs2) inserted between the servo control and the hydraulic servo piston.
Feedback function	The feedback function is reached by a lever that connects the swashplate and the hydraulic servo piston. To avoid sudden accelerations and stoppages, two restrictors (Rs1 and Rs2) are inserted between the servo control and the hydraulic servo piston.


Supply voltage	
12V	**Q12**
24V	**Q24**

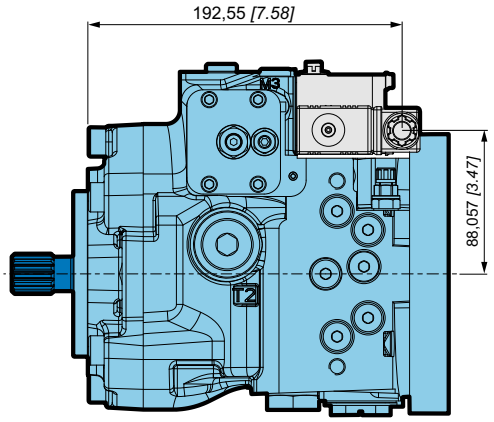

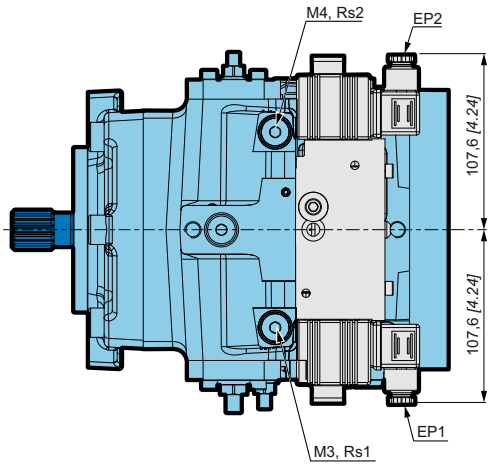

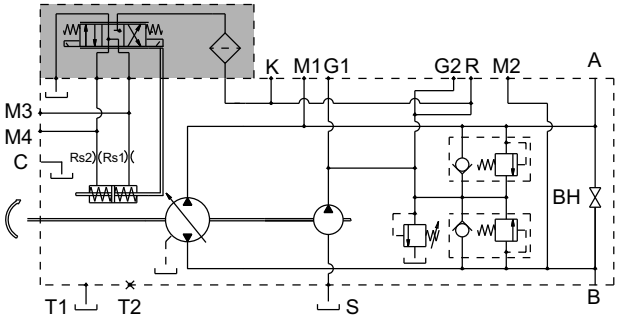


Electrovalve current vs Displacement

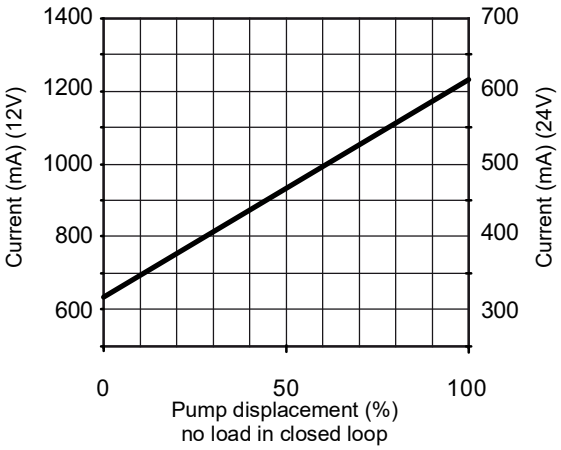

See page 7 for other dimensions
and page 6 for port characteristics.

Solenoids specification		
Operating voltage	12 VDC	24 VDC
Current	1500 mA	750 mA
Resistance at 20°C *[68°F]*	5,3 Ω ± 5%	21,2 Ω ± 5%
Connector type	Hirschman DIN 43650 Deutsch DT04-2P AMP Junior Timer	
Protection	IP6K6 / IPX9K	



OPTIONS

Roller bearing

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														CR

The PM30 can be provided with high capacity roller bearing to extend lifetime of the application. According to characteristics of shaft load, the duty cycle and lifetime epectancy a roller bearing might be needed.

Consult your Poclain Hydraulics application engineer.

Customized identification plate

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														DP

The PM30 can be provided with customized identification plate (customer part number engraved on the plate).

This option is available only for minimum volume of 50 pieces.

Consult your Poclain Hydraulics application engineer for other possibilities.

Mechanical inching


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						D12 or D24								IC

The PM30 with Hydraulic automotive control D (page 38) can be provided with an Inching lever to reduce the pilot pressure independently of the pump rotation speed.

Hydraulic inching

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						D12 or D24								HI

The PM30 with Hydraulic automotive control D (page 38) can be provided with a pressure reducer valve (connected with port K). Its function is to reduce the displacement of pump. The pedals type VB3-002 (only inching function) or VB3-012 (inching and service brake function) can be provided upon request.

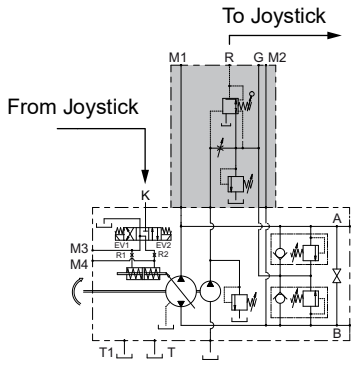

Filter on pressure line


The PM30 can be provided with a F0/F2 filter. Its placement on pressure line ensures that only filtered oil enters the pump closed loop. Maximum pressure difference between filter cartridge input and output is 2 bar *[29 PSI]*. After reaching 2 bar *[29 PSI]*, the cartridge has to be changed.


Tightening torque: 35 Nm *[309 in.lbf]*. Max. working pressure: 30 bar *[435 PSI]*. Filter fitness is of 10 micron.

	1	2	3	4	5	6	7	8	9	10	11
P	M	3	0									

F0 Without clogging indicator


F2 With clogging indicator

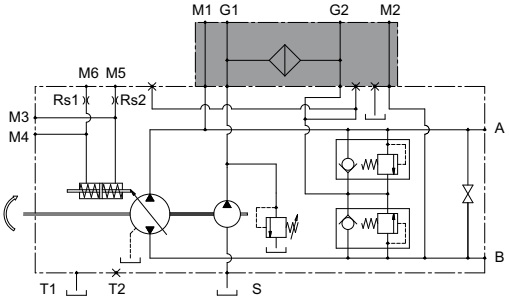

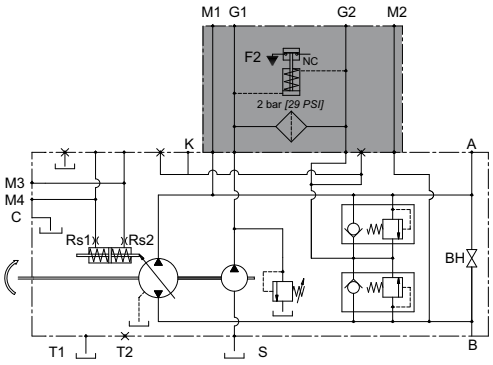



Clogging indicator specification	
Differential working adjustment	3 ± 0,2 bar *[44 ± 3 PSI]*
Working temperature	-30°C ~ 110 °C *[-22°F ~ 230°F]*
Max. vibration level	50 g
Connector type	AMP super seal, 2 way
Current range	0,1-0,2 A max.

Port	Function	UNF ISO 11926-1	GAS ISO 1179-1
G1/G2	Auxiliary/Charge pressure	9/16-18 UNF-2B	13G-G1/4
M1/M2	A/B pressure	9/16-18 UNF-2B	13G-G1/8

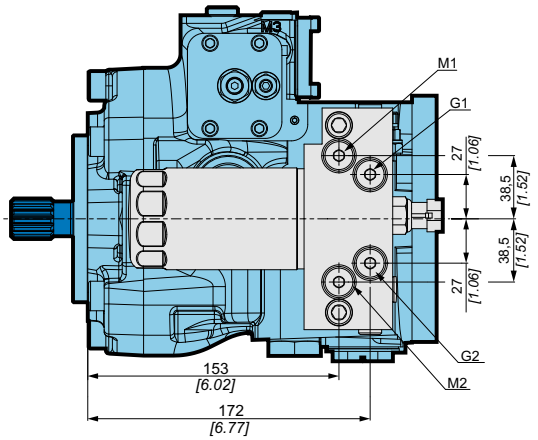


Normally closed contact.
Thread of the clogging indicator is internally connected to the ground.



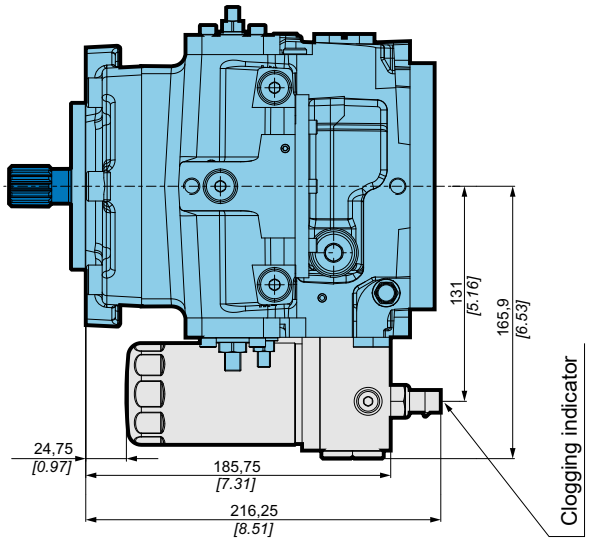


This option is not compatible with option SS (Speed sensor T4).


In case of tandem pump use, each pump must be equipped with it´s own filter and charge pump.



External connections for filter

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														F3

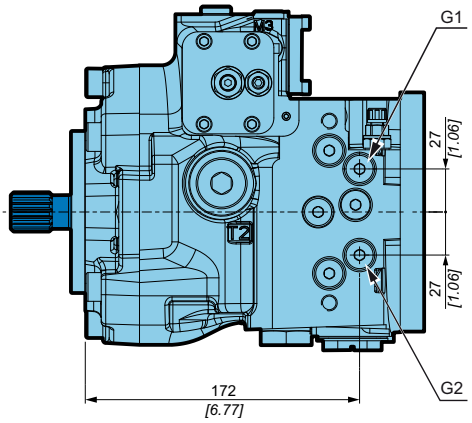


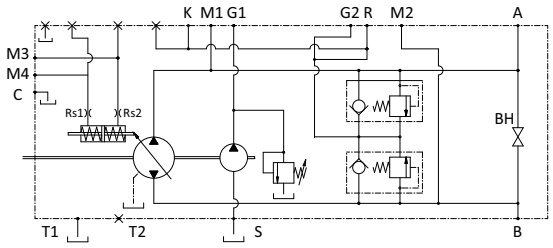

G1 = to filter on line
G2 = Return from filter on line

SAE flange ports


P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														FS

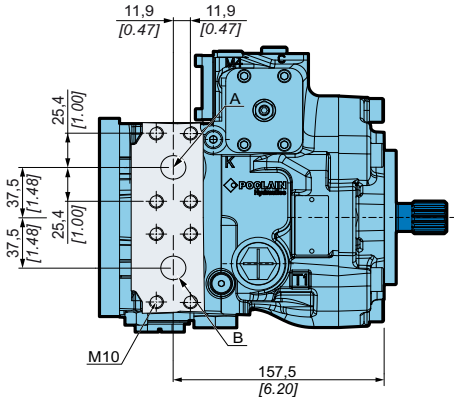


Port	Function	SAE flange
A-B	Services	PN400-DN19
C	Case pressure	13G-G1/4
G1/G2	Auxiliary/Charge pressure	13G-G1/4
M1/M2	A/B pressure	13G-G1/4
M3/M4	Servo control	13G-G1/4
K	External servo pilot	10G-G1/8
R	Servo pilot pressure	13G-G1/4
S	Suction	34G-G1
T1/T2	Drain	27G-G3/4

UNF threads ports

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														FU



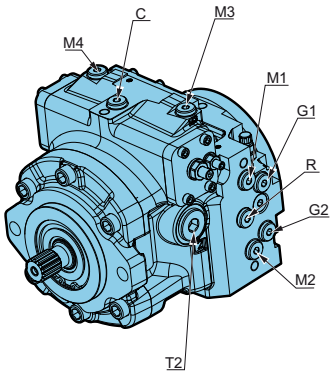

Port	Function	UNF ISO 11926-1
A/B	Services	1”5/16-12 UNF-2B
C	Case pressure	7/16-20 UNF-2B
G1/G2	Auxiliary/Charge pressure	7/16-20 UNF-2B
M1/M2	A/B pressure	7/16-20 UNF-2B
M3/M4	Servo control	7/16-20 UNF-2B
K	External servo pilot	7/16-20 UNF-2B
R	Servo pilot pressure	7/16-20 UNF-2B
S	Suction	1”5/16-12 UNF-2B
T1/T2	Drain	1”1/16-12 UNF-2B

C **Special fittings needed to ensure compatibility with option SS (Speed sensor T4). Consult your Poclain Hydraulics application engineer.**

Finishing coat

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														PA


The pumps can be delivered with finishing coat when requested. Standard paint is RAL 9005 (black color).


Consult your Poclain Hydraulics application engineer for other colors of topcoat.


Flushing valve

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														VS

The PM30 can be provided with a flushing valve to discharge the oil inside the pump casing through a relief valve of the flushing valve. The exchange valve is useful in case the temperature of the oil in the closed circuit is too high.

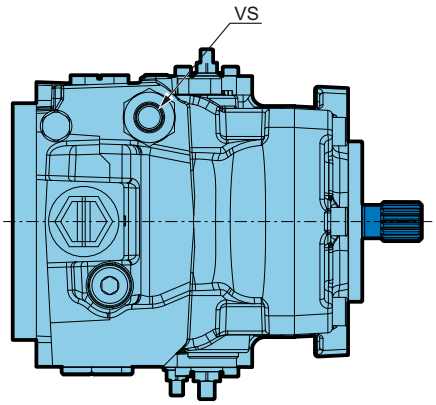

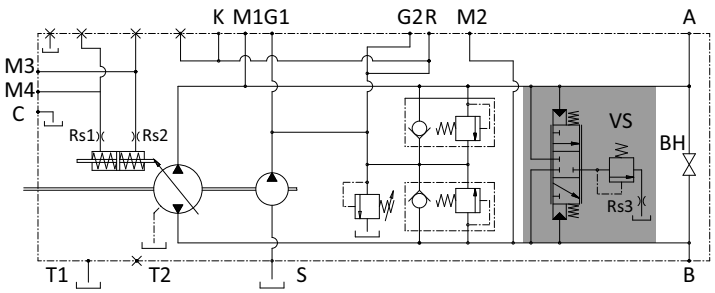

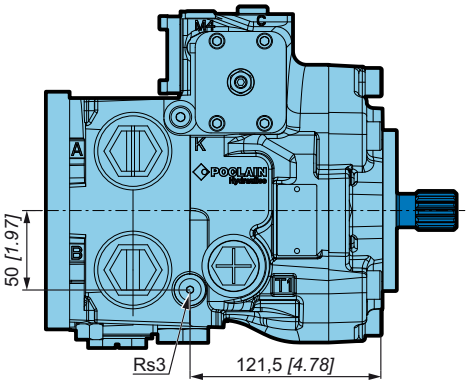

Flushing flow L/min *[gal/min]*

		Orifice diameter* Rs3 mm *[inch]*		
		1,4 *[0.055]*	1,8 *[0.071]*	2,2 *[0.087]*
Delta pressure bar *[PSI]*	20 *[290]*	2,8 *[0.75]*	4,5 *[1.19]*	5,5 *[1.46]*
	25 *[363]*	3,6 *[0.96]*	5,9 *[1.55]*	7,2 *[1.90]*
	30 *[435]*	4,3 *[1.13]*	7,0 *[1.85]*	8,5 *[2.26]*

*Standard setting of orifice 2,2 mm


Refer to Poclain Hydraulics service manual for info about restrictor Rs3 exchange.


Contact you Poclain Hydraulics application engineer for restrictor Rs3 selection.

Neutral position switch

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
						A								MI

The PM30 with Mechanical servo control A (page 27) can be provided with a micro switch to avoid engine start in case the control lever is not centered (zero position).

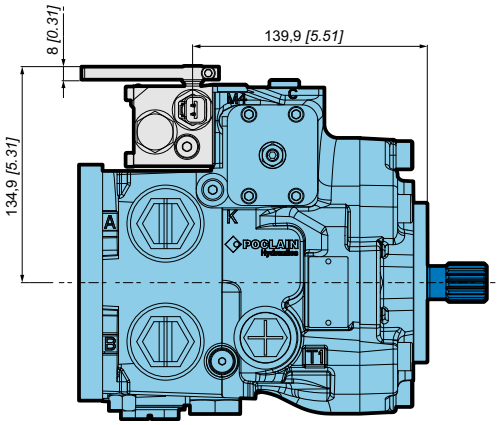

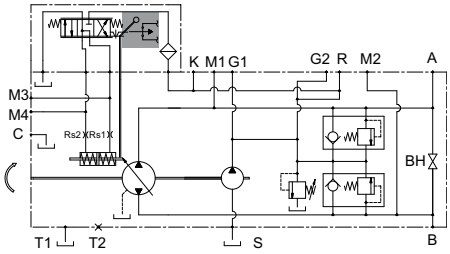



Electrical characteristics	
Type of connector	Deutsch DT04-2P
Output	NC and NO
Cable connections	PG 13,2
Max. current	10 A
Electric load type	Resistive
Operating temperature	from -25°C to 80°C *[-13°F to 176°F]*
Type of protection	IP 67

VPU valve

P	M	3	0			A					VPU
1	2	3	4	5	6	7	8	9	10	11	


The PM30 with Mechanical servo control A (page 27) can be provided with a VPU valve. Without current, the VPU disconnects the servo control from the charge pressure and engages negative brake.

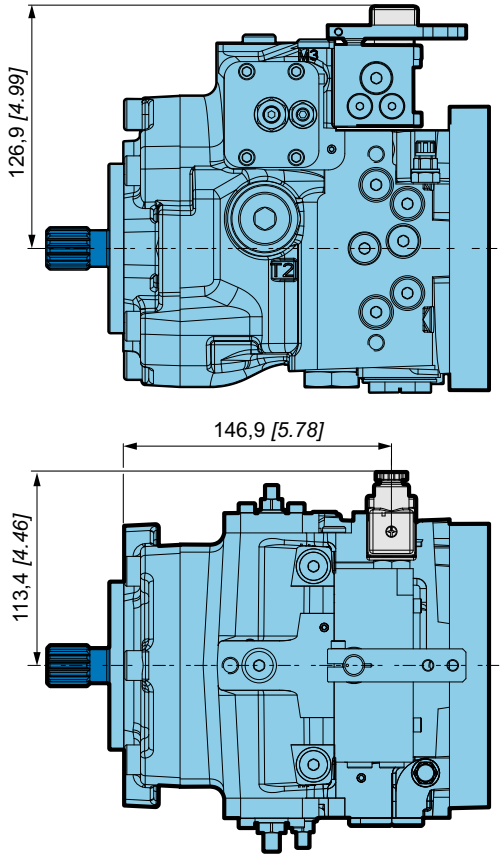

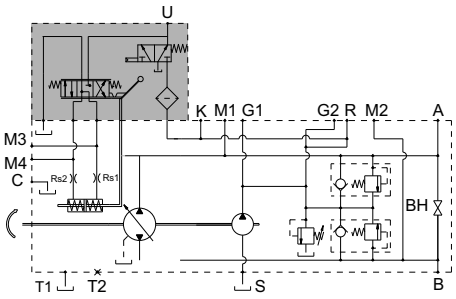

Coil specification	
Type of connector	DIN 43650
Nominal voltage	12V DC
Power	18W
Type of protection	IP 65
Ambient temperature range	from -30°C to 60°C *[-22°F to 140°F]*
Magnet wire insulation	Class H -> 200°C *[392°F]*
Heat insulation	Class H -> 180°C *[356°F]*
Mass	0,19 kg *[0.42 lb]*
Lead wires	600V rating with strain relief


Connector specification	
AC rated voltage	250V max.
DC rated voltage	300V max.
Pin contact rated flow	10A
Pin contact max. flow	16A
Max. cable section	1,5 mm² *[0.002 in²]*
Ø Cable gland PG09-M16x1,5	6 to 8 mm *[0.24 to 0.31 in]*
Type of protection	IP65 EN60529
Insulation class	VDE 0110-1/89
Operating temperature	from -40°C to 90°C *[-40°F to 194°F]*





VPU valve


1	2	3	4	5	6	7	8	9	10	11	
P	M	3	0			S					VPU

The PM30 pump with Hydraulic servo control S (page 29) can be provided with a VPU valve. Without current, the VPU disconnects the servo control from the charge pressure and engages negative brake.

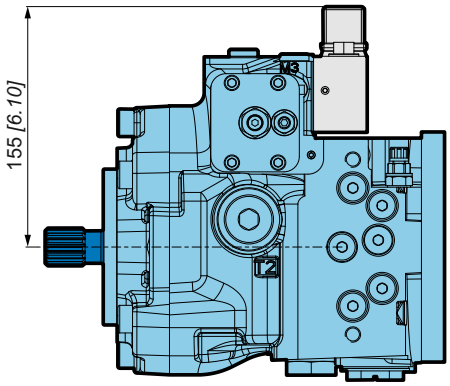

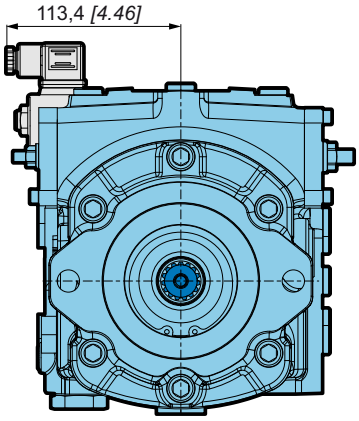

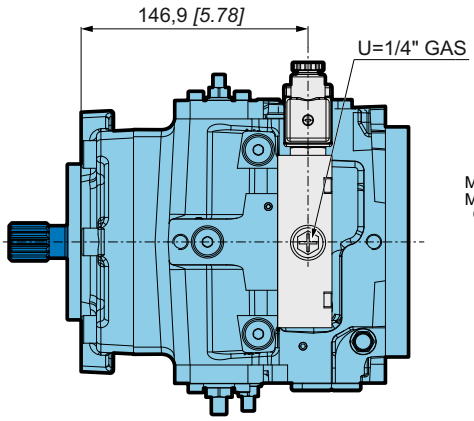

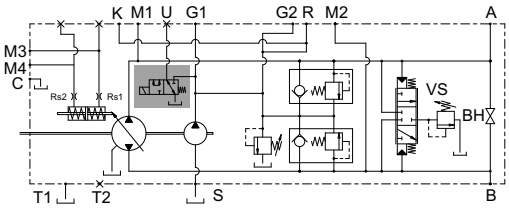


Coil specification	
Type of connector	DIN 43650
Nominal voltage	12V DC
Power	18W
Type of protection	IP 65
Ambient temperature range	from -30°C to 60°C *[-22°F to 140°F]*
Magnet wire insulation	Class H -> 200°C *[392°F]*
Heat insulation	Class H -> 180°C *[356°F]*
Mass	0,19 kg *[0.42 lb]*
Lead wires	600V rating with strain relief

Connector specification	
AC rated voltage	250V max.
DC rated voltage	300V max.
Pin contact rated flow	10A
Pin contact max. flow	16A
Max. cable section	1,5 mm² *[0.002 in²]*
Ø Cable gland PG09-M16x1,5	6 to 8 mm *[0.24 to 0.31 in]*
Type of protection	IP65 EN60529
Insulation class	VDE 0110-1/89
Operating temperature	from -40°C to 90°C *[-40°F to 194°F]*

Speed sensor

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
				☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	SS

The PM30 can be provided with a speed sensor T4.

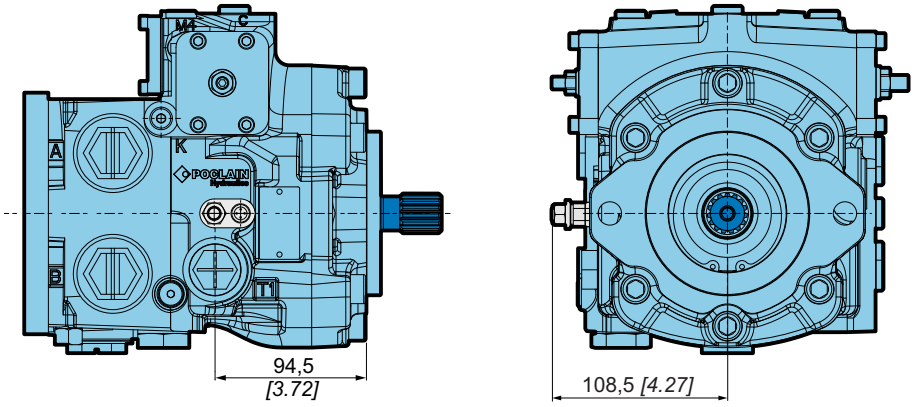

See the Mobile Electronics No. A01889D technical catalogue for the sensor specifications and its connection.

Speed sensor sends a signal of 9 pulses / revolution.

This option is not compatible with “speed regulation loop with 2 sensors”.

This option is not compatible with options F0 and F2 (page 78).

Fluorinated elastomer seals

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
				☐	☐	☐	☐	☐	☐	☐	☐	☐	☐	EV

The PM30 can be provided with fluorinated elastomer seals. Standard NBR sealing are designed to resist to temperature up to 90°C *[194°F]* and to HV type oils. If your application is outside these limits, fluorinated elastomer seals might be needed.


For application of this option please contact your Poclain Hydraulics application engineer.

Brake inching


The PM30 with Hydraulic automotive control D (page 33) can be provided with the B1/B2 brake inching. Its function is to reduce the displacement of pump. Reduction is achivied via brake pedal (connected to Z port). The pedal type VB3-010 (only inching function or inching and sevice brake function) can be provided upon request.





B1 **Hydraulic inching spring Ø1,3 mm *[dia. 0.05 in]***

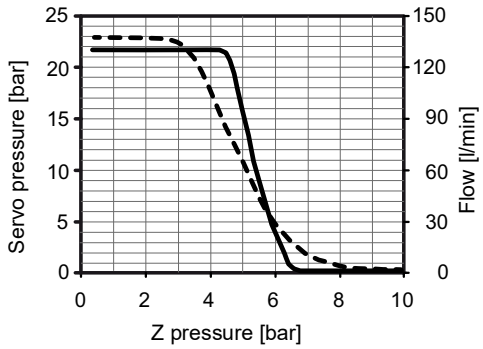



B2 **Hydraulic inching spring Ø1,5 mm *[dia. 0.06 in]***

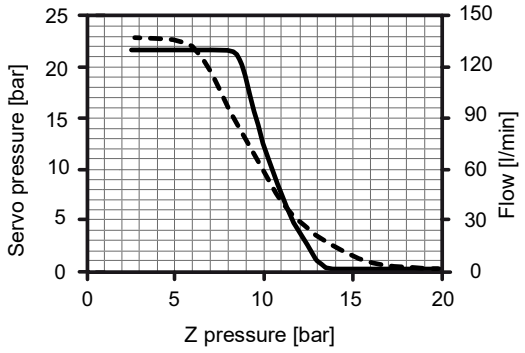



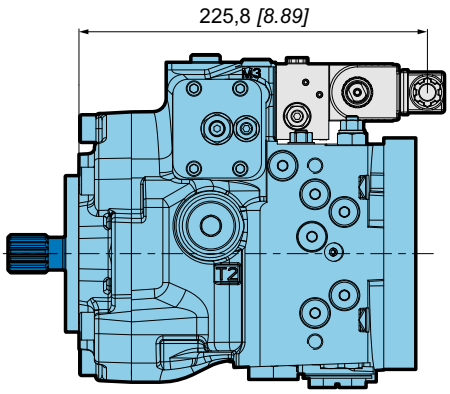

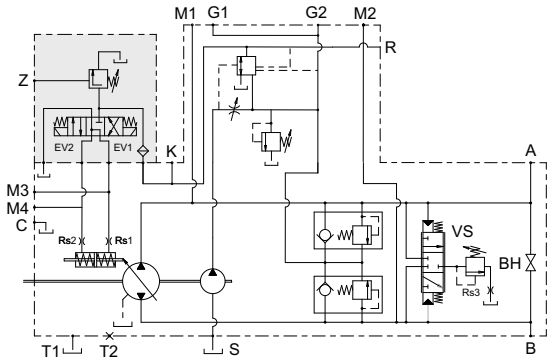

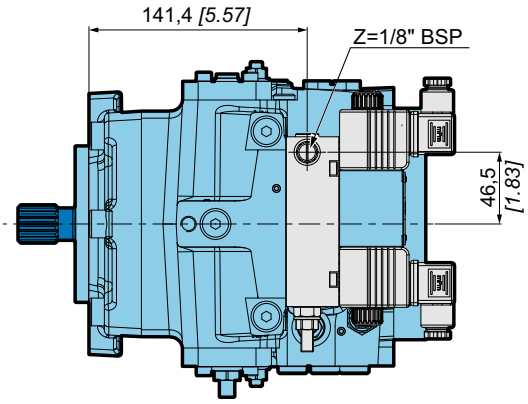

Solenoids specification		
Operating voltage	12 VDC ± 10%	24 VDC ± 10%
Current	1500 mA	750 mA
Resistance at 20°C *[68°F]*	5,3 Ω ± 7%	21,2 Ω ± 7%
Connector type	DIN 43650	
Power	27 W	
Type of protection	IP65	
Mass	0,215 kg *[0.47 lb]*	


The hydraulic inching valve B1/B2 does not provide any sealing between closed loop circuit and pilot circuit. When choosing this function, please be sure that oil to pilot the inching is coming from the same tank as the closed loop.


Anti-stall valve

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														SD

The PM30 can be provided with anti-stall valve SD. It consists a cartridge valve (same cartridge valve as automotive control) which provides a pressure signal for the servo piston of the pump related to the speed of engine.
Its function is to reduce pressure for servo piston in case of engine overload and consequent rpm reduction. As a result the pump de-strokes with an anti-stall effect.

For application of this option please contact your Poclain Hydraulics application engineer.

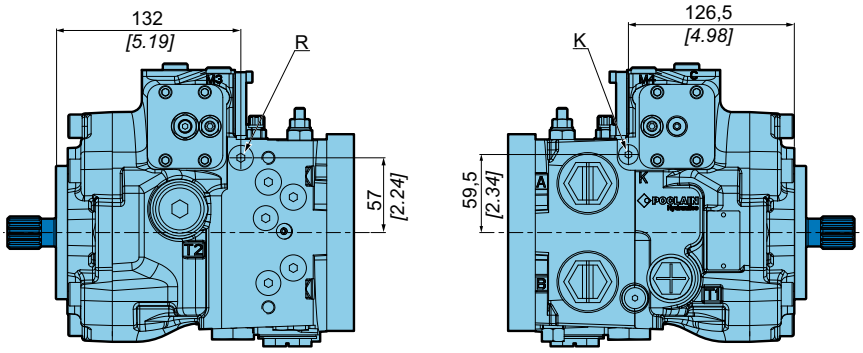

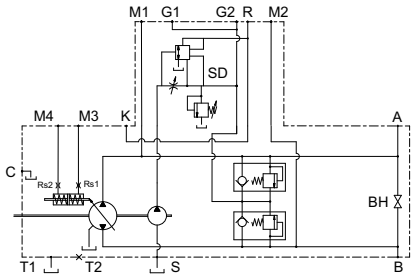



Special version

P	M	3	0	1	2	3	4	5	6	7	8	9	10	11
														ES

Special version is intended for all configurations accepted by Poclain but not explicitly reported on this catalogue.

Consult your Poclain Hydraulics application engineer for other possibilities.





POCLAIN
Hydraulics

Poclain Hydraulics reserves the right to make any modifications it deems necessary to the products described in this document without prior notification.The information contained in this document must be confirmed by Poclain Hydraulics before any order is submitted.
Illustrations are not binding.
The Poclain Hydraulics brand is the property of Poclain Hydraulics S.A.

06/10/2026
Not available
B24995S
Not available
Not available
Not available
Not available
Not available
Not available

www.poclain.com