

DESCRIPTION

Shut - off valves series “EZVL” are produced with connections G 3/8, G 1/2 and G 1 and they are fit to be locked in the exhaust position by means of a standard padlock.They are in compliance with ATEX directive, 2GD category, upon request.






TECHNICAL DATA

Maximum pressure	16 bar
Working temperature	0 ÷ +50 °C (–10 °C with dry air)
Fluid	Filtered, lubricated and unlubricated compressed air
Flow rate at 6 bar ΔP=1 bar	G 3/8 = 2400 Nl/min G 1/2 = 3150 Nl/min G 1 = 4250 Nl/min
Port size	G 3/8 - G 1/2 - G 1
Type of mounting	Modular and in-line

DIMENSIONS AND WEIGHTS - EZVL

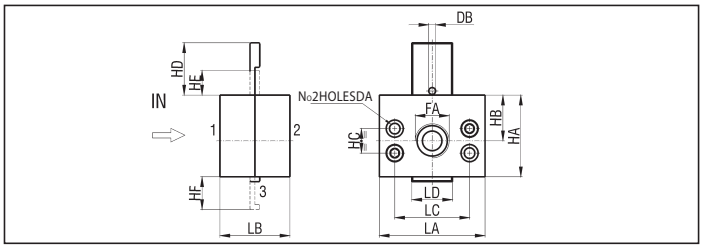

MATERIALS

Body	Anodized aluminium alloy
Seals	NBR rubber
Slider	Anodized aluminium alloy

TYPE	DA	DB	FA	HA	HB	HC	HD	HE	HF	LA	LB	LC	LD	WEIGHT *(g)*
EZVL/3	5,5	4,2	G 3/8	50	25	-	36	15	21	50	39	35	25	260
EZVL/2	6,5	4,2	G 1/2	50	28	15	32	15	20	65	43	46	25	370
EZVL/1	6,1	4,2	G 1	60	30	-	34	15	22	80	60	60	25	700