

BV2N SERİSİ HİDROLİK 2 YOLLU KÜRESEL VANALAR - NPT

BV2N Serisi Hidrolik 2 Yollu Küresel Vanalar, akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler.
BV2N Serisi Hidrolik 2 Yollu Küresel Vanalarda içteki küre çelik olup, sert kromla kaplanmış ve delrinle (POM) yataklandırılmıştır.
BV2N Serisi Hidrolik 2 Yollu Küresel Vanalar hidrolik ve diğer sanayi yağlarının yanı sıra akaryakıt, LPG, CNG ve diğer gaz geçişlerinde de kullanılırlar.

Gövde Malzemesi	Otomat Çeliği
Küre Malzemesi	Sert Krom Kaplı Çelik
Vida Ölçüsü	NPT
Küre Yataklaması	Delrin (POM)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Özel Hallerde	VİTON (-30 °C - +225 °C)
Kullanım Alanı	Kazı makineleri, plastik baskı kalıp makineleri, kimyasal üretim tesisleri, vinçler, kamyonlar ve genel hidrolik uygulamalar.




BV2N SERIES HYDRAULIC 2-WAY BALL VALVES - NPT


BV2N Series Hydraulic 2-Way Ball Valves are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.
BV2N Series Ball Valves can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated steel and delrin (POM) seated.
Ball Valves are suitable for LPG, CNG and other gas applications, as well as hydraulic and other industrial fluids.


Body Material	Carbon steel
Ball Material	Hard chrome coated carbon steel.
Thread Size	NPT
Ball Seats	Delrin (POM)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Upon Request	VITON (-30 °C - +225 °C)
Applications	Excavators, plastic injection mould machines, chemical processing plants, cranes, tankers, dump trucks and general hydraulic applications





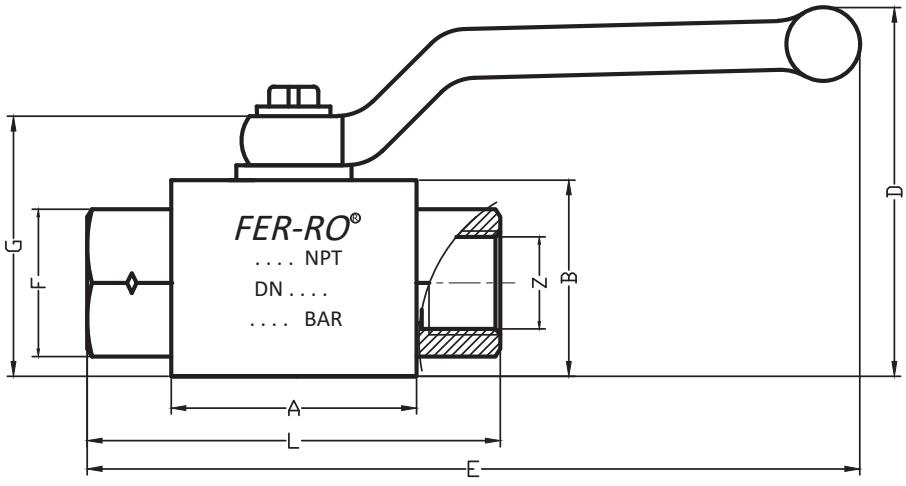

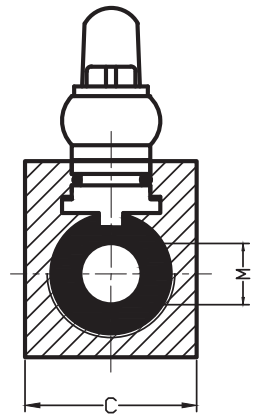



Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçücü (Thread Size) Z	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)								
			A	B	C	D	E	F	G	L	M
BV2N14N	1/4" BSP	500	45	35	30	77	142	24	48	75	DN 10
BV2N38N	3/8" BSP	500	45	35	30	77	142	24	48	75	DN 10
BV2N12N	1/2" BSP	500	50	40	35	82	147	30	53.50	84	DN 13
BV2N34N	3/4" BSP	400	60	55	45	111	221	38	73	96	DN 20
BV2N1N	1" BSP	400	70	60	55	116	235	46	78	118	DN 25
BV2N114N	1 1/4" BSP	380	70	60	55	116	235	50	78	134	DN 25
BV2N112N	1 1/2" BSP	380	70	60	55	116	235	55	78	140	DN 25

