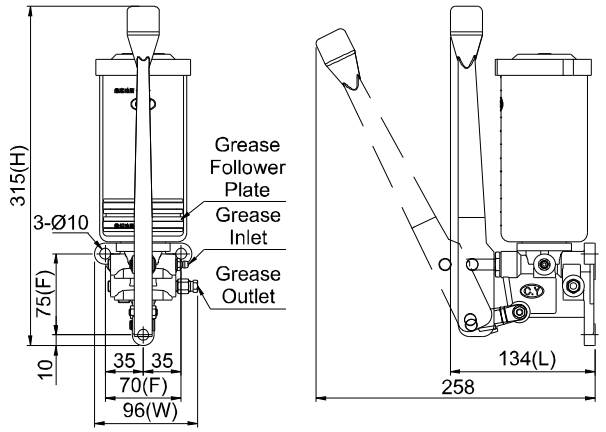
CLHA Resistance Type Grease Manual Lubricator



CLHA-35-R-D-1



CLHA-20-R-D-1



Dimensional Drawing of CLHA-20-R-D-1

◆Features

1. CLHA discharges grease whenever its handle is pulled and pushed back.
2. CLHA has a grease follower plate tightly fit with the grease tank that pushes grease downwards while discharging so no grease remains inside the tank.
3. The outlet of CLHA can be on either the right side or the left side of the handle. A dual-outlet model is also available for selection.
4. CLHA is suitable for machines that do not require continuous lubrication, such as press machines and woodworking machines.

◆Technical Data & Dimensional Data

Model	Tank Capacity	Fixed Bracket	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	Max. Discharge Volume	Max. Operating Pressure	Discharge Bore	Suitable Viscosity	N.W. (kg)
CLHA-10	300cc	X	134	96	315	70x75	2cc/stroke	100 kgf/cm²	Ø4 Ø6 Ø8 PT1/8	Grease NLGI 000-0	1.08
CLHA-20	600cc	X	134	96	315						1.11
CLHA-35	1000cc	O	166	113	340						1.61
CLHA-40	800cc	X	134	96	325						1.14
CLHA-50	2000cc	O	166	130	391						2.09

◆Order Code

CLHA - 20 — R — D — 1

Tank Capacity	
10	300cc
20	600cc
35	1000cc
40	800cc
50	2000cc

Outlet Side	
L	Left Outlet
R	Right Outlet
D	Dual Outlets


Outlet Adapter	
D	Straight Adapter
H	Elbow Adapter

Discharge Bore			
0	Ø4	4	Ø8
1	Ø6	5	Ø8 W/Pressure Gauge
2	Ø4 W/Pressure Gauge	6	PT1/8
3	Ø6 W/Pressure Gauge	7	PT1/8 W/Pressure Gauge

◆Related Products


P. 85


P. 81


P. 82



P. 83


P. 111


P. 113


P. 131


P. 126


P. 125