

CRASD SERİSİ HİDROLİK YÜKSEK BASINÇ ÇİFT ETKİLİ ALÜMİNYUM SİLİNDİRLER

- CRASD Serisi çift etkili alüminyum silindirler hafif yapılarından dolayı kolaylıkla taşınma fonksiyonuna sahiptirler.
- Hızlı geri dönüş sağlayan çift etkili yapı.
- Eksantrik yükü absorbe ederek etkisini düşüren ve aşınmayı azaltan destek keçesi
- Silindirin ömrünü uzatan uzun ömürlü ve pasa karşı dayanıklı sert kaplama yüzey.
- Çelik taban
- Çift etkili
- Takılıp çıkarılabilen sertleştilmiş yivli başlık
- Kirliliği önleyen ve silindirin ömrünü arttıran toz keçesi.
- Tüm modellerde HP700N38FN (3/8” NPTF 700 Bar) Yüksek basınç dişi otomatik rekor ve toz kapağı,

CRASD SERIES HYDRAULIC HIGH PRESSURE DOUBLE ACTING ALUMINIUM CYLINDERS


- CRASD Series double acting aluminum cylinders has lightweight design to provide easy to carry function.
- Double acting operation for fast return
- The exclusive Guide Ring design absorbs eccentric loading and reduces wear.
- Corrosion resistant & durable hard-coat finish extends cylinder life
- Easy to carry handles
- Steel base plate
- Double-acting
- Hardened
- Piston wiper reduces contamination and extends cylinder life
- HP700N38FN (3/8” NPTF 700 Bar) high pressure coupler and dust cap included on all models







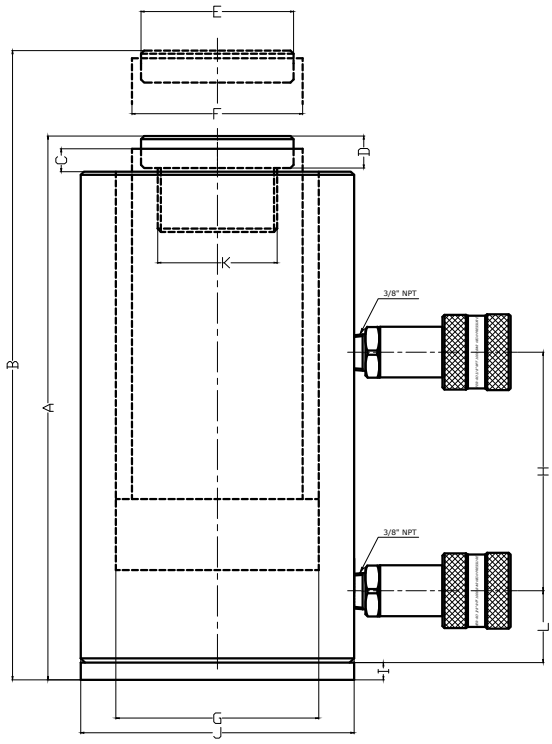

Teknik Özellikler
Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Ton (Ton)	Strok (Stroke)	Ölçüler - mm (Dimensions - mm)												Yağ Kapasitesi (Lt)
				A	B	C	D	E	F	G	H	I	J	K	L	
CRASD25-55	700 Bar	25 Ton	55 mm	234	289	2.5	10	58	60	75	118	6	108	M38x2.5	21.50	0.170
CRASD25-115	700 Bar	25 Ton	115 mm	294	409	2.5	10	58	60	75	178	6	108	M38x2.5	21.50	0.350
CRASD25-165	700 Bar	25 Ton	165 mm	344	509	2.5	10	58	60	75	228	6	108	M38x2.5	21.50	0.500
CRASD25-215	700 Bar	25 Ton	215 mm	394	609	2.5	10	58	60	75	278	6	108	M38x2.5	21.50	0.650
CRASD25-265	700 Bar	25 Ton	265 mm	444	709	2.5	10	58	60	75	328	6	108	M38x2.5	21.50	0.800
CRASD25-315	700 Bar	25 Ton	315 mm	494	809	2.5	10	58	60	75	378	6	108	M38x2.5	21.50	0.950
CRASD25-365	700 Bar	25 Ton	365 mm	544	909	2.5	10	58	60	75	428	6	108	M38x2.5	21.50	1.100
CRASD50-55	700 Bar	50 Ton	55 mm	229	284	2.5	3.5	71.5	80	95	118	6	128	-	33.50	0.350
CRASD50-115	700 Bar	50 Ton	115 mm	289	404	2.5	3.5	71.5	80	95	178	6	128	-	33.50	0.750
CRASD50-165	700 Bar	50 Ton	165 mm	339	504	2.5	3.5	71.5	80	95	228	6	128	-	33.50	1.050
CRASD50-215	700 Bar	50 Ton	215 mm	389	604	2.5	3.5	71.5	80	95	278	6	128	-	33.50	1.370
CRASD50-265	700 Bar	50 Ton	265 mm	439	704	2.5	3.5	71.5	80	95	328	6	128	-	33.50	1.700
CRASD50-315	700 Bar	50 Ton	315 mm	489	804	2.5	3.5	71.5	80	95	378	6	128	-	33.50	2.000
CRASD50-365	700 Bar	50 Ton	365 mm	539	904	2.5	3.5	71.5	80	95	428	6	128	-	33.50	2.300
CRASD75-55	700 Bar	75 Ton	55 mm	221	276	2.5	3.5	71.5	90	116	109	8	148	-	33.50	0.600
CRASD75-115	700 Bar	75 Ton	115 mm	281	396	2.5	3.5	71.5	90	116	169	8	148	-	33.50	1.100
CRASD75-165	700 Bar	75 Ton	165 mm	331	496	2.5	3.5	71.5	90	116	219	8	148	-	33.50	1.550
CRASD75-215	700 Bar	75 Ton	215 mm	381	596	2.5	3.5	71.5	90	116	269	8	148	-	33.50	2.050
CRASD75-265	700 Bar	75 Ton	265 mm	431	696	2.5	3.5	71.5	90	116	319	8	148	-	33.50	2.500
CRASD75-315	700 Bar	75 Ton	315 mm	481	796	2.5	3.5	71.5	90	116	369	8	148	-	33.50	3.000
CRASD75-365	700 Bar	75 Ton	365 mm	531	896	2.5	3.5	71.5	90	116	419	8	148	-	33.50	3.500
CRASD100-55	700 Bar	100 Ton	55 mm	230	285	2.5	3.5	71.5	100	135	121	8	178	-	33.50	0.700
CRASD100-115	700 Bar	100 Ton	115 mm	290	405	2.5	3.5	71.5	100	135	181	8	178	-	33.50	1.500
CRASD100-165	700 Bar	100 Ton	165 mm	340	505	2.5	3.5	71.5	100	135	231	8	178	-	33.50	2.200
CRASD100-215	700 Bar	100 Ton	215 mm	390	605	2.5	3.5	71.5	100	135	281	8	178	-	33.50	2.800
CRASD100-265	700 Bar	100 Ton	265 mm	440	705	2.5	3.5	71.5	100	135	331	8	178	-	33.50	3.500
CRASD100-315	700 Bar	100 Ton	315 mm	490	805	2.5	3.5	71.5	100	135	381	8	178	-	33.50	4.000
CRASD100-365	700 Bar	100 Ton	365 mm	540	905	2.5	3.5	71.5	100	135	431	8	178	-	33.50	4.700
CRASD150-55	700 Bar	150 Ton	55 mm	240	295	2.5	3.5	71.5	120	165	134	8	208	-	33.50	1.000
CRASD150-115	700 Bar	150 Ton	115 mm	300	415	2.5	3.5	71.5	120	165	194	8	208	-	33.50	2.200
CRASD150-165	700 Bar	150 Ton	165 mm	350	515	2.5	3.5	71.5	120	165	244	8	208	-	33.50	3.200
CRASD150-215	700 Bar	150 Ton	215 mm	400	615	2.5	3.5	71.5	120	165	294	8	208	-	33.50	4.100
CRASD150-265	700 Bar	150 Ton	265 mm	450	715	2.5	3.5	71.5	120	165	344	8	208	-	33.50	5.000
CRASD150-315	700 Bar	150 Ton	315 mm	500	815	2.5	3.5	71.5	120	165	394	8	208	-	33.50	6.100
CRASD150-365	700 Bar	150 Ton	365 mm	550	915	2.5	3.5	71.5	120	165	444	8	208	-	33.50	7.000