

4 HOLES ISO 4 PORTS UNIDIRECTIONAL GEAR PUMP
4 DELİKLİ ISO 4 PORTLU TEK YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity	VG= 10 cSt ÷ 100 cSt				
Max kinematic viscosity suggested at the start-up	VG= 750 cSt				
Viscosity index suggested VI > 100	Working temperature -15°C +100°C				
Oil filtering	> 200 bar: 10 µm < 200 bar: 25 µm				
Inlet pressure	-0,3 ÷ 2 bar				

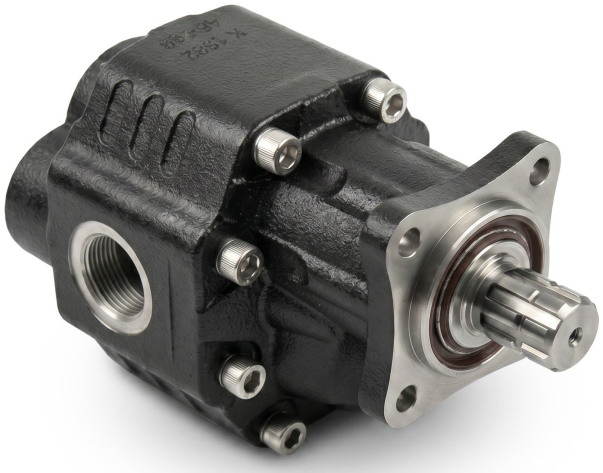

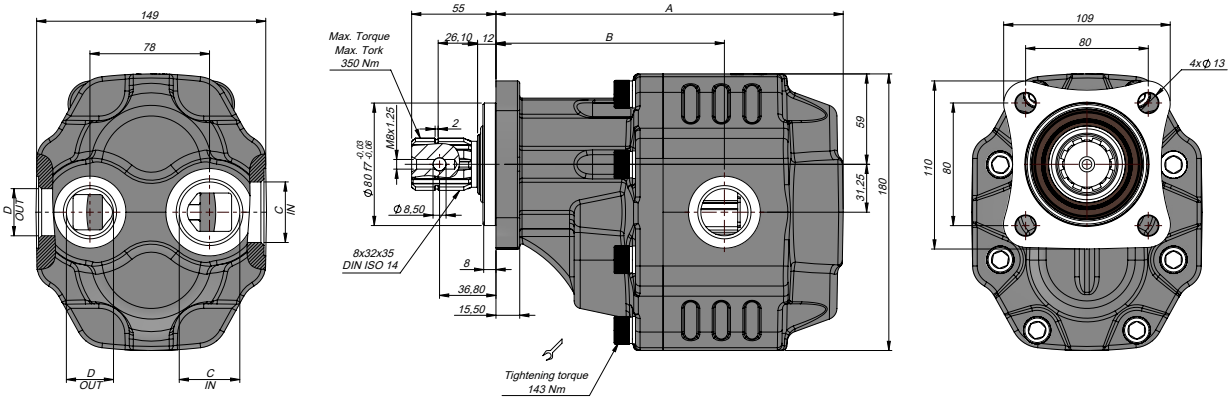

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol / Left	Sağ /Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	D
G40063SF115	G40063SF125	63	290	315	325	1800	2700	300	209.5	139	G1"	G3/4"
G40073SF115	G40073SF125	73	280	300	315				213.5	139		
G40087SF115	G40087SF125	87	260	280	290				218.5	144	G1 1/4"	G1"
G40109SF115	G40109SF125	109	250	270	280				226.5	149		
G40116SF115	G40116SF125	116	240	260	270	1500			226.5	149		
G40133SF115	G40133SF125	133	220	250	260		2500		235.5	150	G1 1/2"	
G40151SF115	G40151SF125	151	180	210	220				241.5	153		