

FCV SERİSİ VOLAN TİP HIZ AYAR VALFLERİ (ÇEKSİZ)

FCV serisi Volan Tip Hız Ayar Valfleri (Çeksiz), çift yönde akışkanın basınç ve hızını kontrol etmeye yarayan bir valf türüdür. Mil üzerinde bulunan gövde, vidalı bir şekilde ileri geri ayarlanarak akışkanın yağ geçişi belirlenir. Mil üzerinde bulunan kontra somun sıkılarak belirlenen akış geçiş ayarının titreşimden kaynaklanan oynamaları ve debi değişiklikleri engellenerek akışkanın gücünü hassas şekilde koruyup kontrol eder ve kusursuz ayar yapılmasını sağlar.


Malzeme	Otomat Çeliği
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Kullanım Alanı	Genel hidrolik uygulamaları



FCV SERIES VOLAN TYPE FLOW CONTROL VALVES (WITHOUT CHECK)


The FCV series Volan Type Flow Control Valves (Without Check) is a type of Valve for controlling the pressure and speed of the fluid in the double direction. The body on the shaft is set back and forth with a screw to determine the oil passage of the fluid. The control nut on the shaft protects and controls the power of the fluid precisely and ensures perfect adjustment by preventing vibration-induced changes in the flow passage setting.


Material	Carbon Steel
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Applications	General hydraulic applications

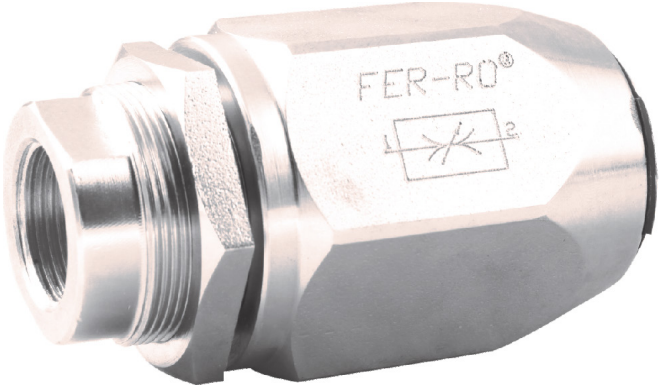





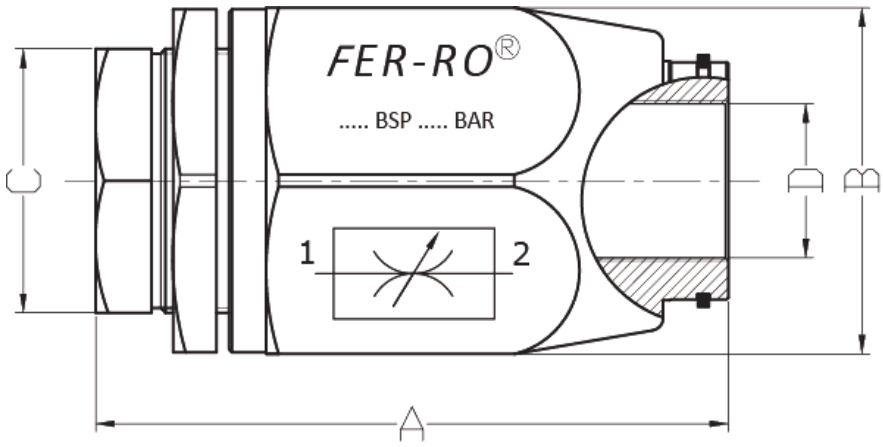

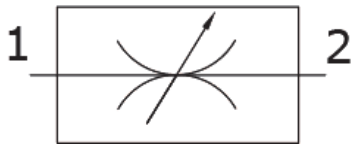

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Size) D	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions) - mm		
			A	B	C
FCVG14N	1/4"BSP	430	70	AA 32	AA 24
FCVG38N	3/8"BSP	410	81,50	AA 38	AA 30
FCVG12N	1/2"BSP	380	85	AA 41	AA 32
FCVG34N	3/4"BSP	320	110	AA 55	AA 41
FCVG1N	1"BSP	300	133	AA 65	AA 50
FCVG114N	1-1/4"BSP	280	-	-	-
FCVG112N	1-1/2"BSP	260	-	-	-
FCVG2N	2"BSP	230	-	-	-