4 HOLES ISO BI-DIRECTIONAL GEAR PUMP


4 DELİKLİ ISO ÇİFT YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100		Working temperature -15°C +100°C			
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

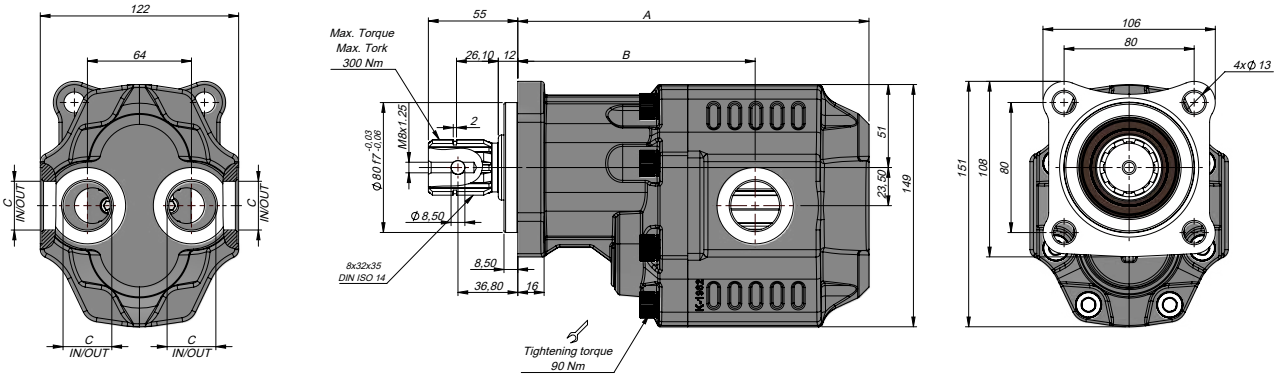

Kod Code	İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G300345F135	34	240	250	260	2200	2800	300	186	130.5	G3/4"	
G300435F135	43	230	240	250	2000	2500		192	135.5		
G300515F135	51	220	230	240				197	135.5	G1"	
G300615F135	61	210	230	235	1900			205	142		
G300735F135	73	210	225	230				210	144		
G300825F135	82	205	225	230				216	146		