

M14 DIRECT ACTING MAIN RELIEF VALVE FOR M MANIFOLDS



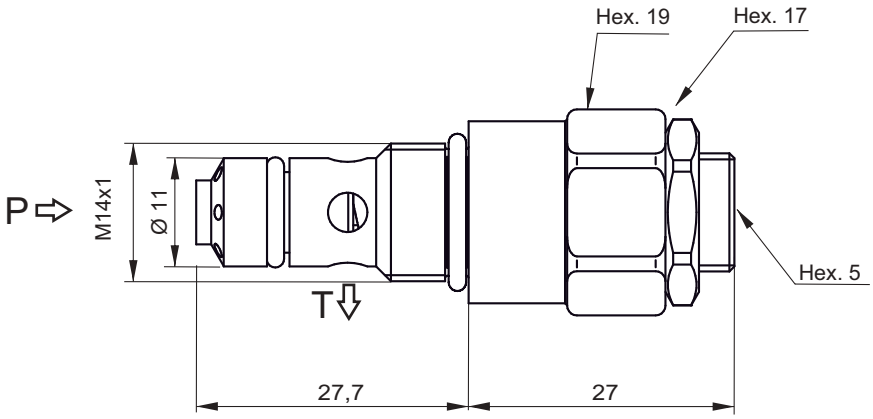



Main features

Max pressure	280 bar
Weight	0.06 Kg
Max flow	15 l/min
Tightening torque	25 Nm
Fluid temperature	-30°C ÷ +80°C
Filtration	ISO 4406

Spare part code

VMDC — **Direct acting main relief valve**

15 — **Nominal size:** 15 = 15 l/min


C — **Working range:** B = 5 ÷ 280 bar

1 — **Options:** 1 = screw (std)


Assembly code

DM_280

Minimum setting pressure

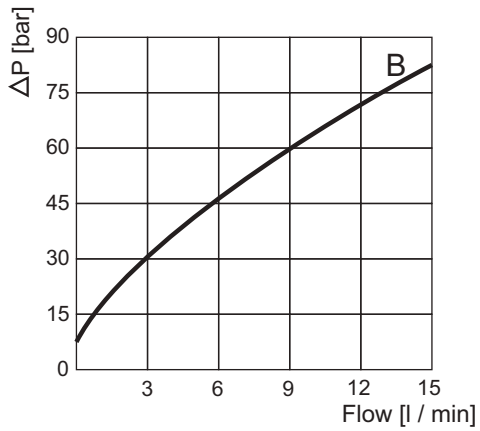

Pressure vs flow

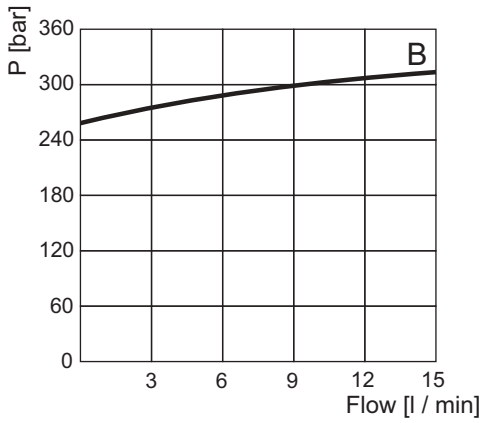

Note: Values measured on valve alone (no cavity) with an oil viscosity of 46 cSt at 50 °C. Pressure drop may change depending on fluid viscosity and temperature