
FLOW CONTROL VALVE


(Electro-Proportional Flow Control Valve, Normally Open Throttle)

Ordering Code:	**PFH-13A-X-Y-Z**

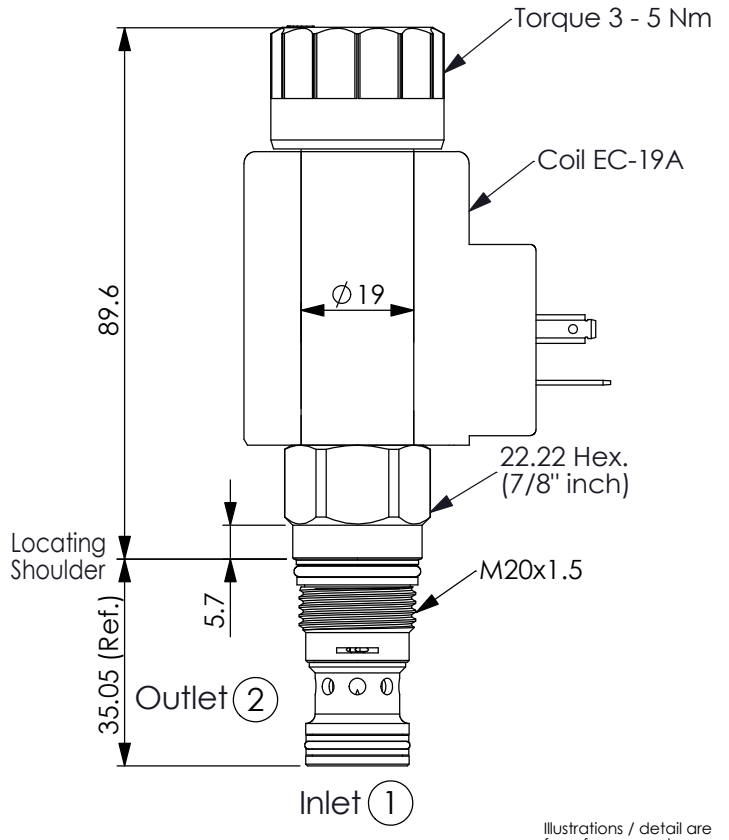


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

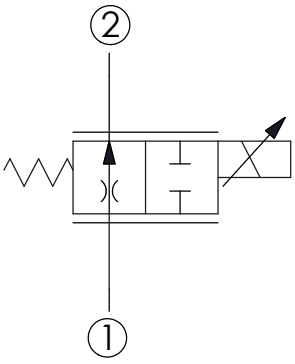

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	28	l/min
Cavity-Tooling:	13A-2	
Installation torque:	40 - 50	Nm
Linearity (with dither)		<2%
Repeatibility (with dither)		<2%
Hysteresis (with dither)		<4%
Hysteresis with DC input		<8%
Deadband, nominal (as a percentage of input)		25%
Weight:(with Coil)	0.53	kg
(without Coil)	0.30	kg

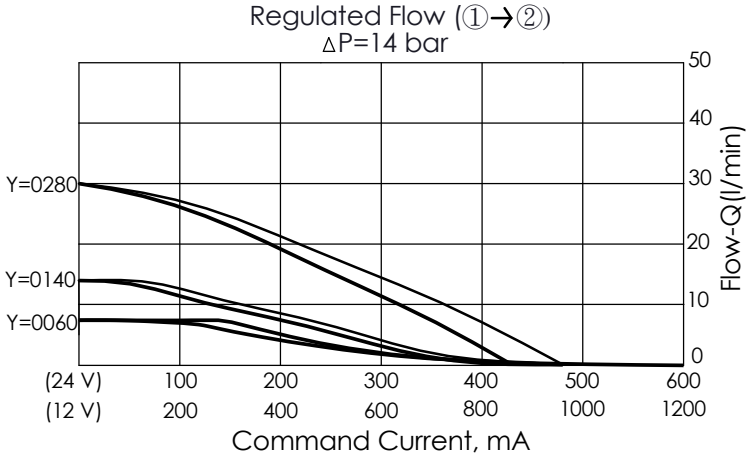

If you need more information
Please contact our sales department

X	OPERATION	
2D	2 Ports、22 Watt. Coil ∅19 mm tube	

Y	FLOW	
	NOMINAL CAPACITY	
0060	0.4~6 LPM	
0140	0.6~14 LPM	
0280	0.8~28 LPM (Standard)	

Z	OPTIONS	
N	Non-adjustable 	
P	Push Style Manual Override 	