DPC PRODUCT

dpc@dpc.com.tw



K*

Product description

- Modular design.
- Non-rising adjusting knob.
- Relieving piston design
- Lubricator can be filled under pressure.


Specifications

Name	K-856	KS-856
Port size	1/4" , 3/8", 1/2"	
Port size of pressure gauge	1/4"	
Max. supply pressure (bar)	9.5	
Operating pressure range (bar)	0.5-7	
Ambient and media temperature	5 ~ 60 ℃	
Filtration	40 μ (Standard) , 5μ(Optional)	
Oil mist removal rate	ISO VG32	
Bowl capacity (Filter)	90 c.c.	40 c.c.
Bowl capacity (Lubricator)	160 c.c.	90 c.c.

K-856 / Dimensions (mm)




FRL
Weight (KG)
2.53
2.78 (1/2")

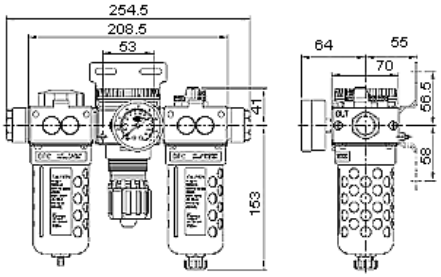




FR&L
Weight (KG)
1.75
2.00 (1/2")

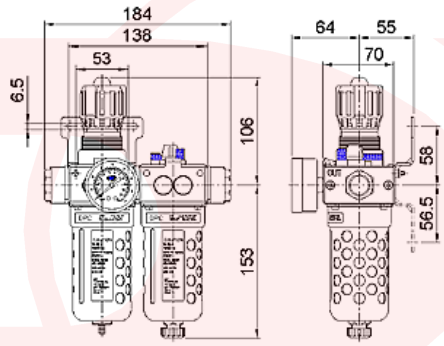




Filter & Regulator
Weight (KG)
0.98
1.23 (1/2")

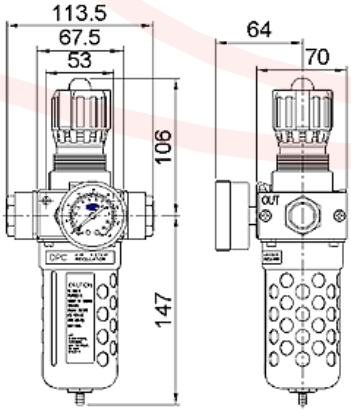

KS-856 / Dimensions (mm)




FRL
Weight (KG)
2.38
2.63 (1/2")

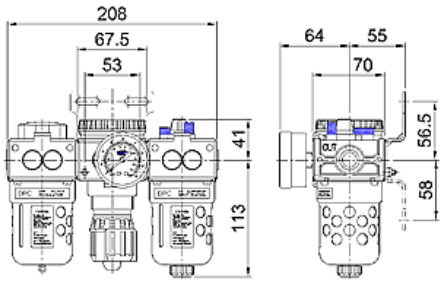




FR&L
Weight (KG)
1.60
1.85 (1/2")

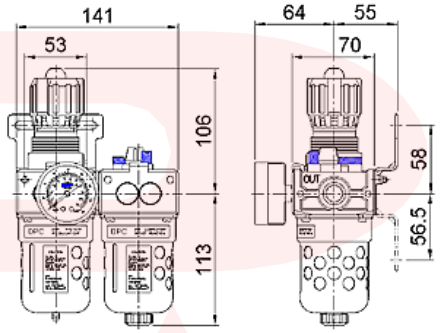




Filter & Regulator
Weight (KG)
0.91
1.16 (1/2")

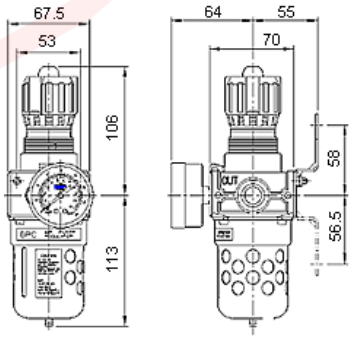

K-856 / Dimensions (mm)




Filter
Weight (KG)
0.78
1.03 (1/2")

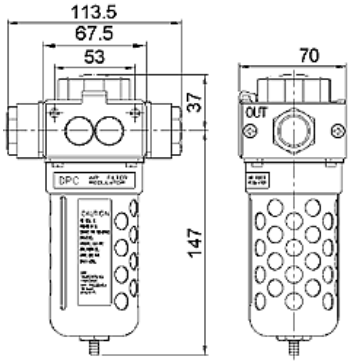




Regulator
Weight (KG)
0.70
0.95 (1/2")

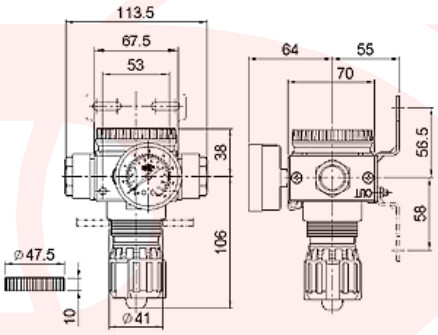




Lubricator
Weight (KG)
0.71
0.96 (1/2")

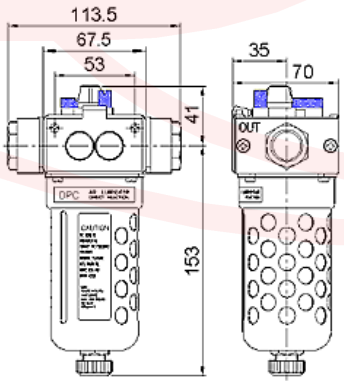

KS-856 / Dimensions (mm)




Filter
Weight (KG)
0.79
1.04 (1/2")

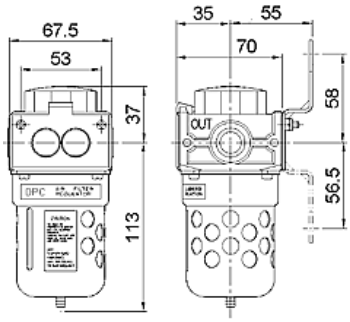



Lubricator
Weight (KG)
0.64
0.89 (1/2")



FENG TIAN INDUSTRIAL CO., LTD.

CHING MEI ELECTRICAL MACHINE INDUSTRIAL CO., LTD.

HUANG SHIANG SHANGHAI PNEUMATIC INC.

Copyright © 2015 DPC Ind.