

ACCUMULATOR SENSE, PUMP UNLOAD VALVE

Ordering Code:	QP-10W-X-Y-Z

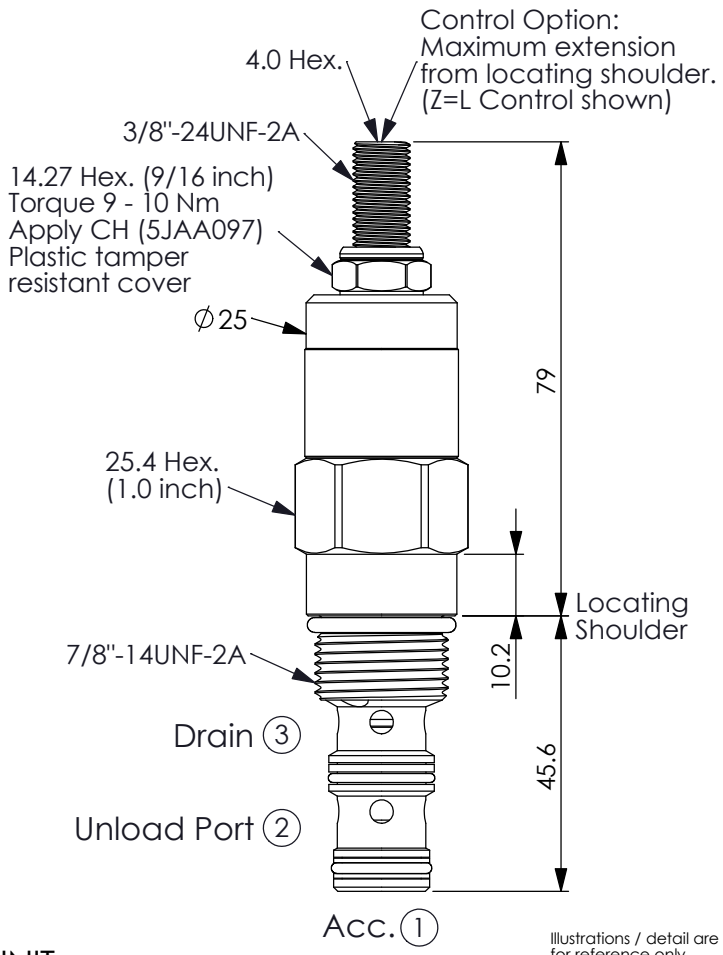


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.




Typical Circuit

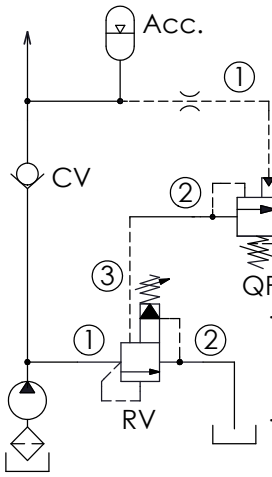

· Recommend With RV Series, Relief Valve, Fast-Acting. Example: RV11A30-Y-Z-85

· Please kindly contact Winner if you need detailed information.

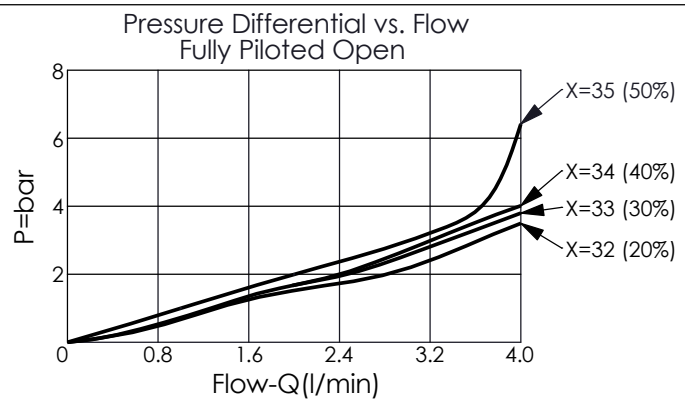

TECHNICAL DATA

Max.Operating pressure:	350	bar
Rated flow:	4	l/min
Cavity-Tooling:	10W-3	
Installation torque:	35 - 45	Nm
Weight:	0.25	kg

Note: Careful consideration should be given when selecting an adjustment range. System pressure drops and flows tend to affect the operation of unloading valves.

Y	SPRINGS	
	ADJUSTMENT RANGES	
A	70 - 210 bar (70 bar Standard Setting)	
B	30 - 105 bar (70 bar Standard Setting)	
D	18 - 55 bar (25 bar Standard Setting)	
W	100 - 280 bar (210 bar Standard Setting)	

X	OPERATION	
31	10% Nominal Differential	
32	20% Nominal Differential	
33	30% Nominal Differential	
34	40% Nominal Differential	
35	50% Nominal Differential	

· If you need to control precisely, please select QP-11A-3A(32)(33)(35).

Z	OPTIONS	
L	Leakproof hex. socket screw. 