
4 HOLES K KEYED UNIDIRECTIONAL GEAR PUMP


4 DELİKLİ K KAMALI TEK YÖNLÜ DİŞLİ POMPA



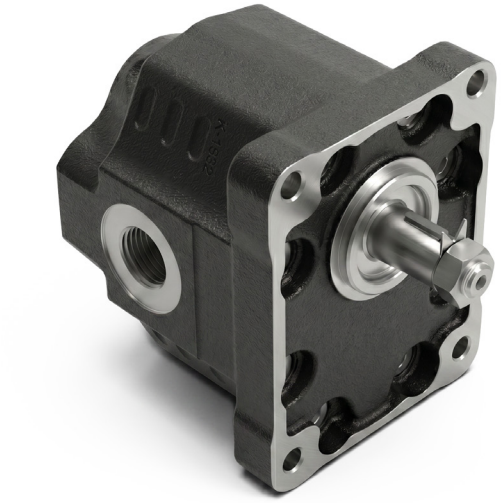

HİDROLİK SEMBOL
HYDRAULIC SYMBOL

Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100		Working temperature -15°C +100°C			
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

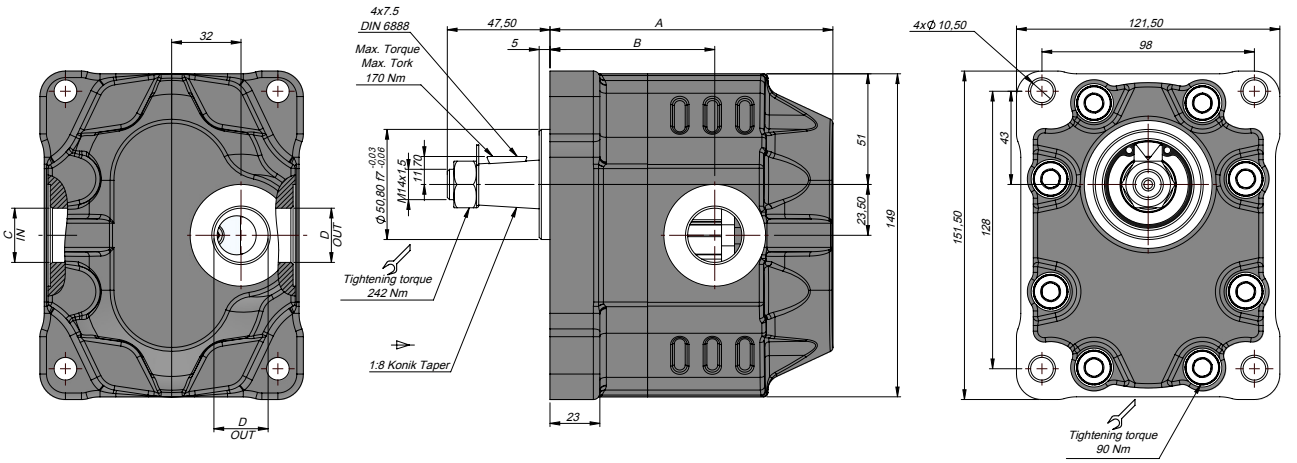

Kod Code		İletim hacmi Displacement	Max. Sürekli Basıncı Max. Continuous pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
Sol/Left	Sağ/Right	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	RPM	(mm)	(mm)	C	D
G30017KK611	G30017KK621	17	290	315	325	2500	3000	300	112	65	G1/2"	G1/2"
G30022KK611	G30022KK621	22							118	70	G3/4"	
G30027KK611	G30027KK621	27							123	71		
G30034KK611	G30034KK621	34	280	300	310	2200	2800		129	76		G3/4"
G30043KK611	G30043KK621	43	270	290	300	2000	2500		134	76		
G30051KK611	G30051KK621	51	240	260	280				142	82.5	G1"	
G30061KK611	G30061KK621	61	220	240	250	1900			154.5	84.50		
G30073KK611	G30073KK621	73	205	225	230				153	86.5	G1 1/4"	G1"
G30082KK611	G30082KK621	82							166	100.5	G1 1/4"	G1" G3/4" (Alternative)
G30100KK611	G30100KK621	100	180	200	220	1500	1800		182	104.5		
G30125KK611	G30125KK621	125	160	180	200				183.5	104.5		