

FLOW CONTROL VALVE
(Fully Adjustable Needle)

Ordering Code:	**NV-17E-X-Y-Z**

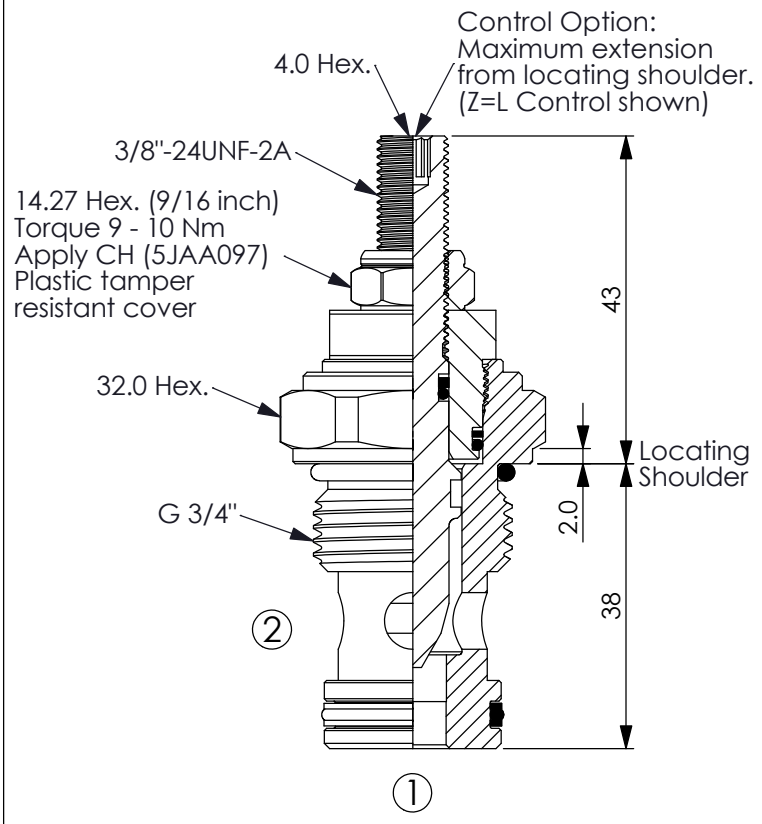

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.




TECHNICAL DATA

Max. operating pressure:	350	bar
	(Refer To Performance Chart)	
Rated Flow:	58	l/min
	(Refer To Performance Chart)	
Cavity-Tooling:	17E-2	
Installation torque:	45 - 55	Nm
Weight:	0.20 (**Z**=L)	kg




Performance Chart

FULLY OPEN RESTRICTOR-FLOW IN BOTH DIRECTIONS

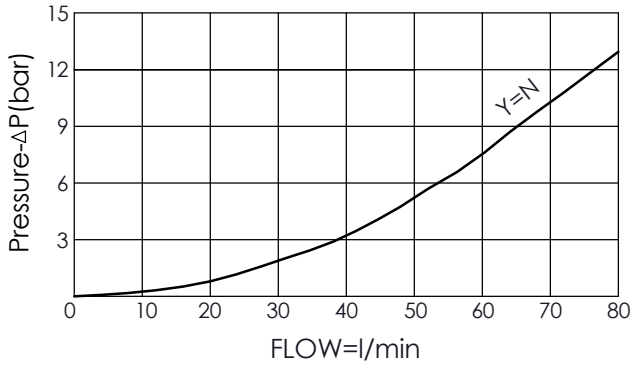

X	**OPERATION**	
20	Needle Valve	

Y	**MAXIMUM NOMINAL ORIFICE**	
N	∅ 7.2 mm	

Z	**OPTIONS**		
L	Leakproof hex. socket screw.		
E	Handknob and locknut.		
B	Handknob and aluminum locknut.		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)	