

BV2AWMN SERİSİ SU VE HAVA 2 YOLLU MADENCİLİK KÜRESEL VANALARI (BSP – Rd)



BV2AWMN Serisi Su ve Hava 2 Yollu Madencilik Küresel Vanalar, akışkanın açma ve kısılmasında kullanılırlar. Kolayca açılıp kapanabilmeleri akışkan geçişinin rahat olmasını sağlar. Volumetrik yapılarından dolayı hızlı ve verimli çalışırlar ve akışkanda oluşabilecek kavitasyonları engellerler. İstenildiğinde kare pim üzerindeki kilitleme pulu yardımıyla açık veya kapalı olarak kilitlenebilirler. BV2AWMN Serisi Su ve Hava 2 Yollu Madencilik Küresel Vanalarda içteki küre malzemesi pirinçten olup, sert krom ile kaplanmıştır. BV2AWMN Serisi Su ve Hava 2 Yollu Madencilik Küresel Vanalar madencilik sektöründe su ve hava hatlarında kullanılırlar.

Gövde Malzemesi	Otomat Çeliği
Küre Malzemesi	Sert Krom Kaplı – Pirinç
Vida Ölçüsü	BSP – Rd (Yuvarlak diş)
Küre Yataklaması	Özel sızdırmazlık elemanı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III pasivasyon)
Kullanım Alanı	Su ve Hava hatlarının bulunduğu madencilik sektörü uygulamalarında




BV2AWMN SERIES 2 WAY MINING BALL VALVES (WATER & AIR APPLICATIONS) (BSP – Rd)

BV2AWMN Series 2-Way Mining Ball Valves (Water & Air Applications) are used to either shut-off or open of flow passage and their easy operation provides unrestricted flow. Due to their volumetric structure they work rapidly and efficiently, and prevent cavitation.
BV2AWMN Series 2-Way Mining Ball Valves (Water & Air Applications) can be locked in the open or closed position through locking washer on the circle pin. Internal ball is hard chrome coated brass.
BV2AWMN Series 2-Way Mining Ball Valves (Water & Air Applications) are suitable for water and air applications in mining sector.

Body Material	Carbon steel
Ball Material	Hard chrome coated brass
Thread Size	BSP – Rd (Round Thread)
Ball Seats	Special sealing equipments
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Applications	Mining sector applications including water and air lines references





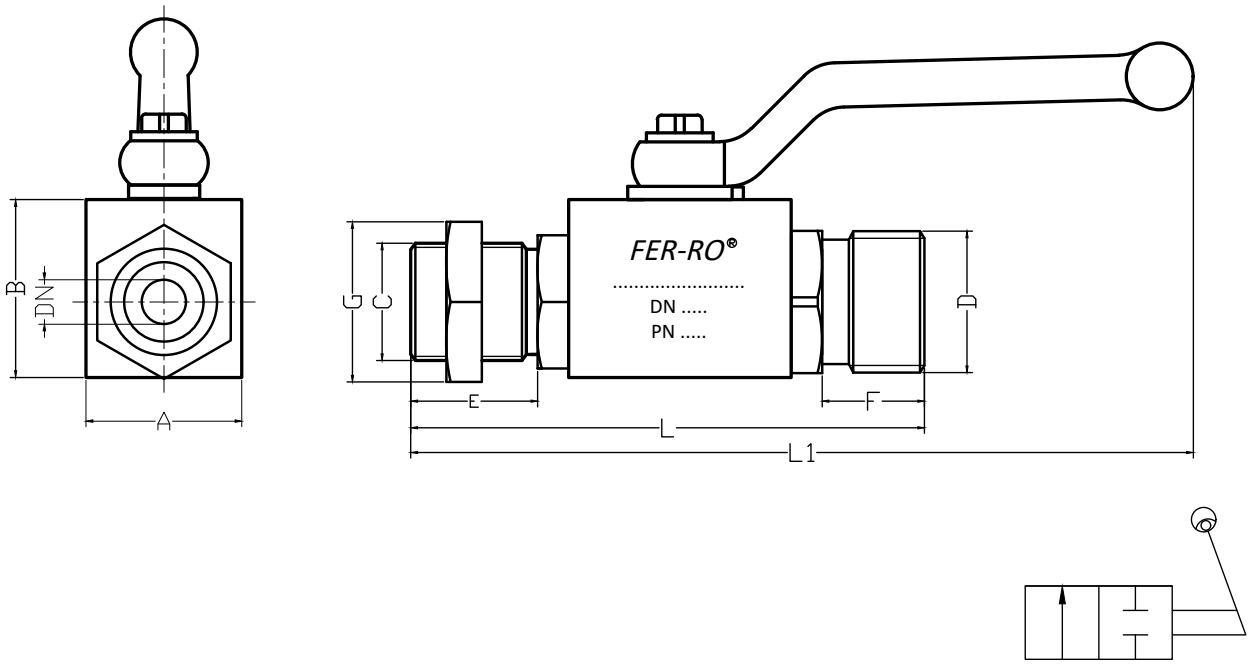

Teknik Özellikler
Technical Specifications

Kod (Code)	Akış Ölçüsü (Diameter) DN	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)								
			A	B	C	D	E	F	G	L	L1
BV2AWMNG12RD32DN10N	10	-	-	-	-	-	-	-	-	-	-
BV2AWMNG34RD32DN12N	12	300	35	40	3/4" BSP	Rd32x1/8"	28.50	23	AA 32	115.50	165
BV2AWMNG34RD32DN16N	16	250	40	45	3/4" BSP	Rd32x1/8"	28.50	23	AA 32	121.50	168
BV2AWMNG1RD32DN20N	20	-	-	-	1" BSP	Rd32x1/8"	-	-	-	-	-
BV2AWMNG1RD38DN20N	20	200	45	55	1" BSP	Rd38x1/8"	28.50	27	AA 41	131	238.50
BV2AWMNG114RD38DN25N	25	-	-	-	11/4" BSP	Rd38x1/8"	-	-	-	-	-
BV2AWMNG114RD46DN25N	25	-	-	-	11/4" BSP	Rd46x1/6"	-	-	-	-	-
BV2AWMNG112RD55DN32N	32	-	-	-	11/2" BSP	Rd55x1/6"	-	-	-	-	-