

MFCC SERİSİ NG06 MODÜLER ÇEKLİ HIZ AYAR VALFİ



NG06 Modüler çekli hız ayar valfleri akışkanın hızının bir yönde ayarlanmasını diğer yönde de çekvalfi açarak rahatça geçişini sağlayan valflerdir. NG06 Modüler Hız Ayar Valfleri pleyt üzerine bağlantı ile diğer valflerle uyumlu çalışmaktadır. Montaj yüzeyi NG06'dır. NG06 Modüler çekli hız ayar valfleri mobil ve diğer sanayi alanlarında geniş kapsamda kullanılmaktadır.

Malzeme	Alüminyum
Bağlantı Şekli	NG06 Bağlantılı
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kullanım Alanı	Genel hidrolik uygulamaları

MFCC SERIES NG06 MODULAR FLOW CONTROL VALVES (WITH CHECK)



NG06 Modular Flow Control Valves (with check) are valves that allow the fluid speed to be adjusted in one direction and pass comfortably by opening the check valve in the other direction. NG06 Modular Flow Control Valves are compatible with other valves by connecting to the subplates. Mounting surface is NG06. NG06 Modular Flow Control Valves (with check) are widely used in mobile and other industrial areas.


Material	Aluminium
Connection Type	NG06 Connection
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Applications	General Hydraulic Applications









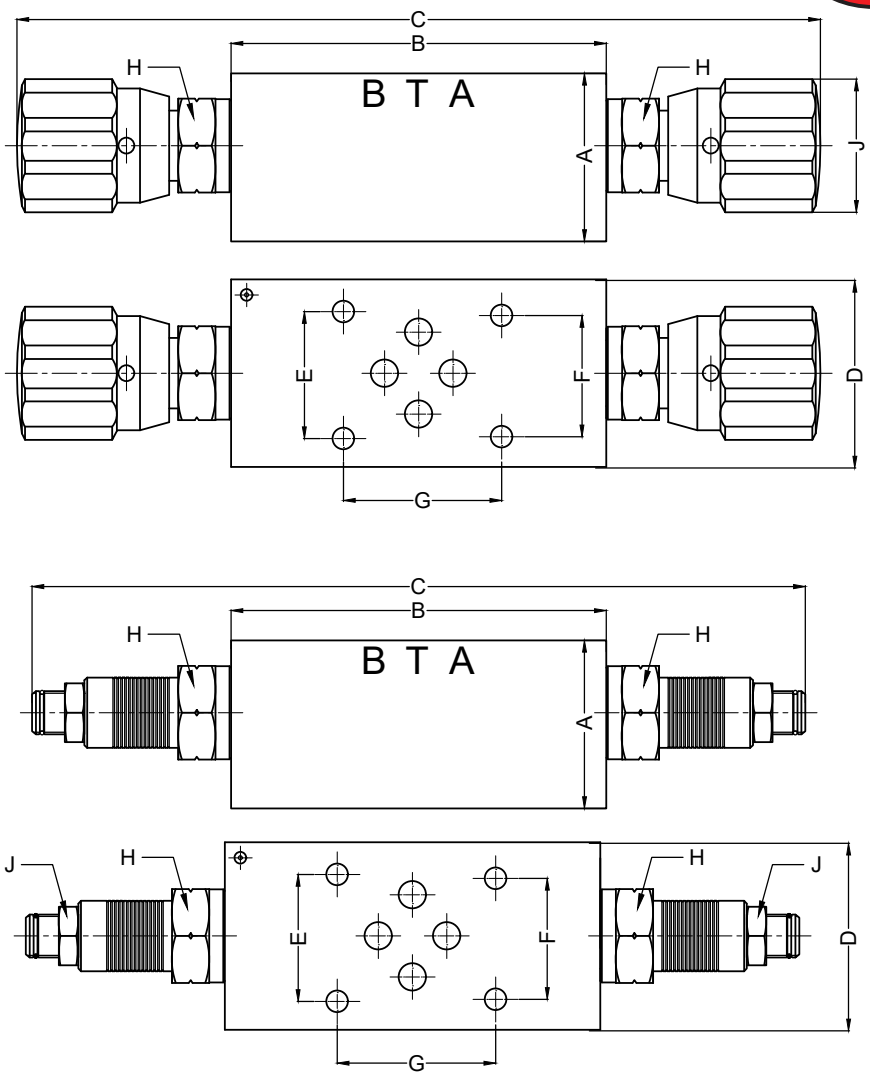

Teknik Özellikler
Technical Specifications

Kod (Code)	Bağlantı Ölçüsü (Connection Type)	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) Lt/Min	Ölçüler - mm (Dimensions - mm)								
				A	B	C	D	E	F	G	H	J
MFCCKNNG06N	NG06	350	40	43	96	223	48	32.5	31	40.5	AA24	Ø32
MFCCSHNG06N	NG06	350	40	43	96	222	48	32.5	31	40.5	AA24	AA15

