
AM5UD... MODULAR DIRECT CHECK VALVES CETOP 5

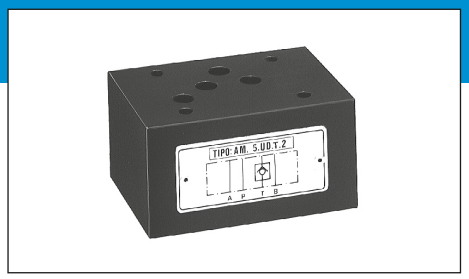

AM5UD...

SCREWS AND STUDS	SECT. D 36

AM5UD type modular check valves allow free flow in one direction, while a conical seated poppet prevents flow in the opposite direction.
They are available on single A, B, P and T lines, and on double A and B, P and T lines (see hydraulic symbols).


1 bar springs are standard, while 5 bar rated springs are available on request.

Max. operating pressure	350 bar
Minimum opening pressure spring 1	1 bar
Minimum opening pressure spring 5	5 bar
Max. flow	80 l/min
Hydraulic fluids	Mineral oils DIN 51524
Fluid viscosity	10 ÷ 500 mm^2/s
Fluid temperature	-25°C ÷ 75°C
Ambient temperature	-25°C ÷ 60°C
Max. contamination level	class 10 in accordance with NAS 1638 with filter $ß_{25}≥75$
Weight	2,1 Kg


ORDERING CODE

AM	Modular valve
5	CETOP 5/NG10
UD	Direct check valve
**	Control on lines **A / B / P / T / AB / PT**
*	Minimum opening pressure **1** = 1 bar **5** = 5 bar
**	**00** = No variant **V1** = FKM
2	Serial No.


PRESSURE DROPS



HYDRAULIC SYMBOLS

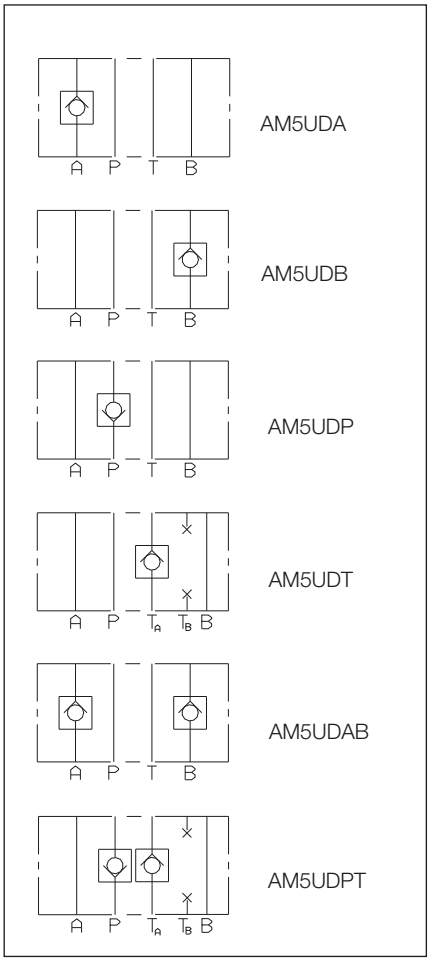

OVERALL DIMENSIONS

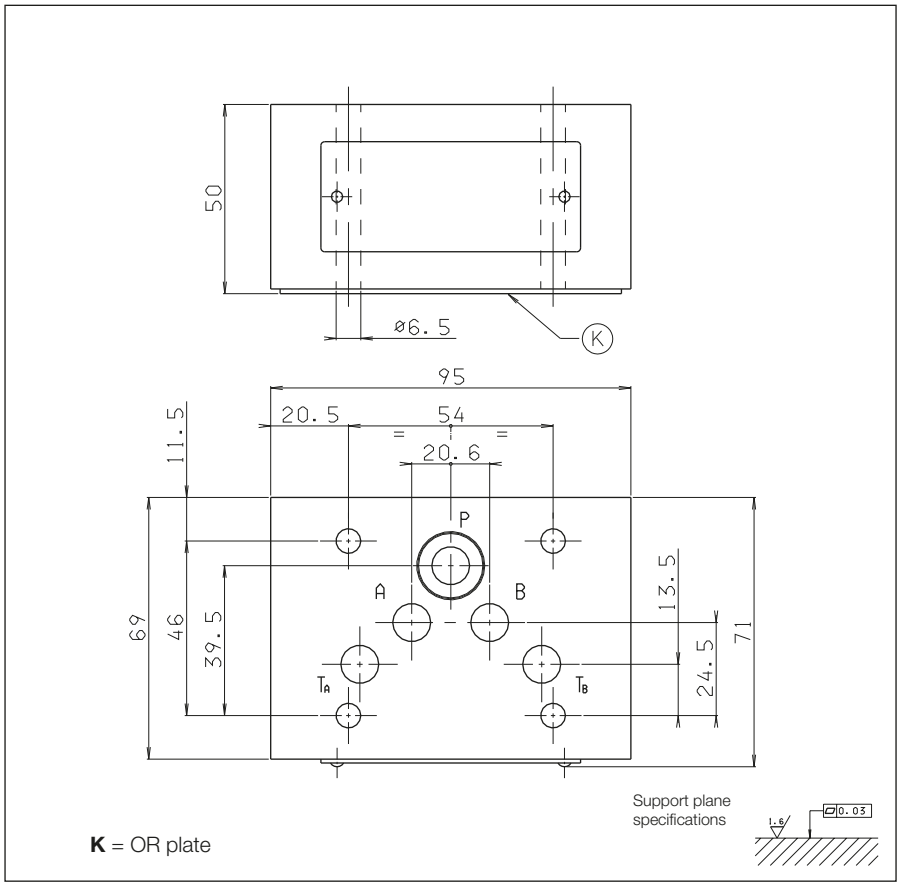

K = OR plate