

SAE08 MAIN CHECK VALVE



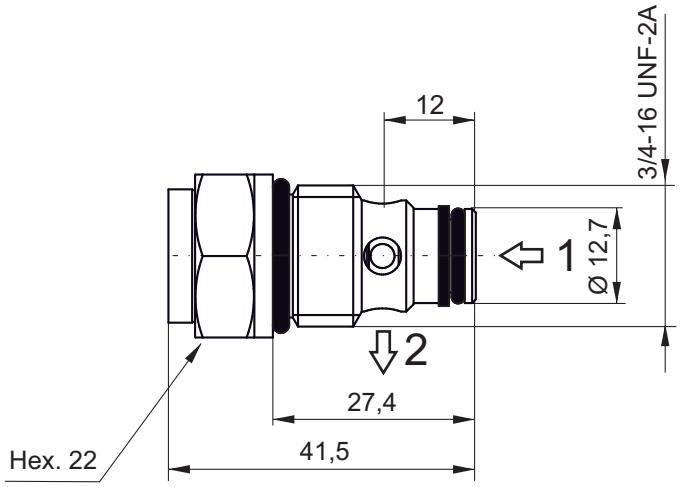



Main features

Max pressure	350 bar
Weight	0.052 Kg
Max flow	25 l/min
Tightening torque	25 Nm
Fluid temperature	-30°C ÷ +80°C
Cracking pressure	0,5 bar
Filtration	ISO 4406

Spare part code

VUC — **Check valve**

20C — **Nominal size:** 20


***** — **Options:**
- = no options
FP = pressure port closed with a 1/4 BSP plug

Assembly code

JC*

where * is the option

Pressure drop diagram

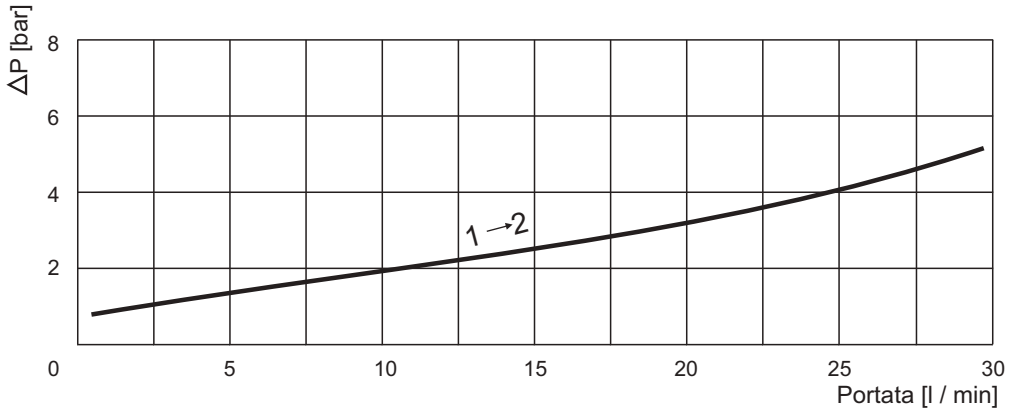

Note: Values measured on valve alone (no cavity) with an oil viscosity of 46 cSt at 50 °C. Pressure drop may change depending on fluid viscosity and temperature