3 HOLES UNI BI-DIRECTIONAL GEAR PUMP


3 DELİKLİ UNI ÇİFT YÖNLÜ DİŞLİ POMPA



HİDROLİK SEMBOL
HYDRAULIC SYMBOL



Fluid	Mineral or synthetic compatible with the following seals: NBR, FKM, FPM, Nylon				
Kinematic viscosity suggested	Average ambient temp. (°C)	< -10	-10÷10	10÷35	> 35
	VG (cSt = mm2/s)	22	32	46	68
Optimal kinematic viscosity			VG= 10 cSt ÷ 100 cSt		
Max kinematic viscosity suggested at the start-up			VG= 750 cSt		
Viscosity index suggested VI > 100		Working temperature		-15°C +100°C	
Oil filtering			> 200 bar: 10 µm < 200 bar: 25 µm		
Inlet pressure			-0,3 ÷ 2 bar		

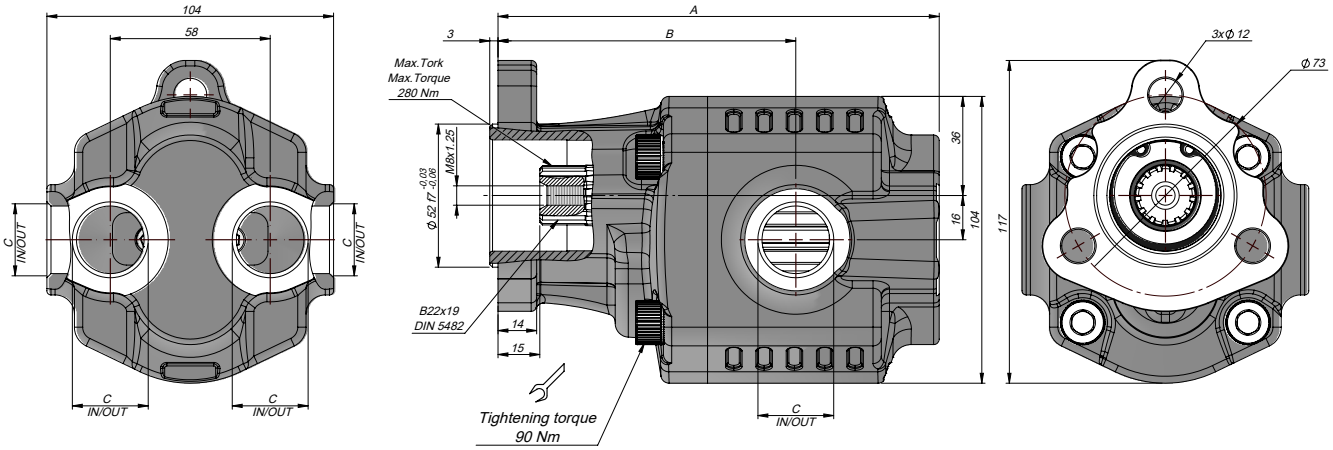

Kod Code	İletim Hacmi Displacement	Max. Sürekli Basıncı Max. Continuous Pressure	Maks. Aralıklı Basınç Max. Intermittent Pressure	Maks. Anlık Basınç Max. Peak Pressure	Maks. Sürekli Hız Max. Continuous Speed	Maks. Aralıklı Hız Max. Intermittent Speed	Min. Hız Min. Speed	A	B	Giriş Inlet	Çıkış Outlet
BD	(cm³/rev)	(100%)(BAR)	(20 sec.max)(BAR)	(6 sec.max)(BAR)	(RPM)	(RPM)	(RPM)	(mm)	(mm)	C	C
G20006UF731	6	280	310	325	2200	3000	300	130	96	G1/2"	G1/2"
G20010UF731	10							136	102		
G20016UF731	16							143	102		
G20020UF731	20	260	280	290				146	102		
G20025UF731	25	220	250	260				152	106	G3/4"	G3/4"
G20032UF731	32	190	210	220	2000	2800		160	108		
G20040UF731	40	160	180	190	1800	2500		171	119		