

SOLENOID OPERATED VALVE
Continuous Duty Coils-ED 100%

Ordering Code:	**EC-19A-X-Y-Z**

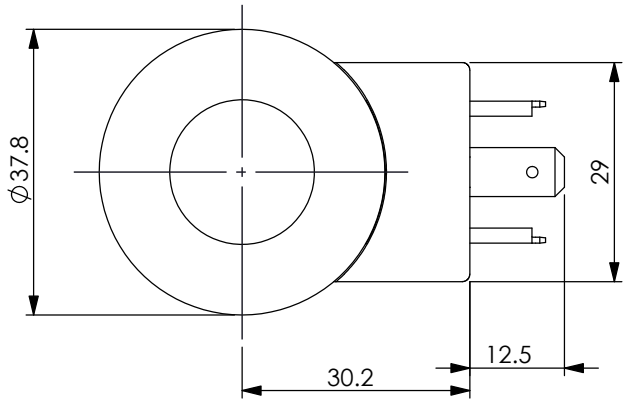


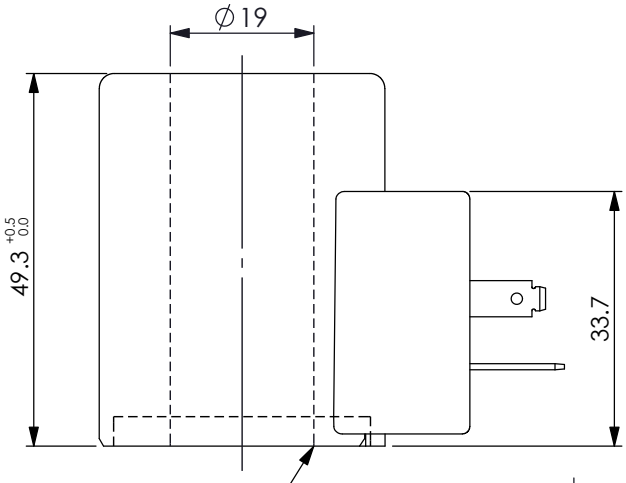

While installing, please be sure that this side is toward to the solenoid cartridge valve.

Illustrations / detail are for reference only. Data subject to change.

UNIT:mm

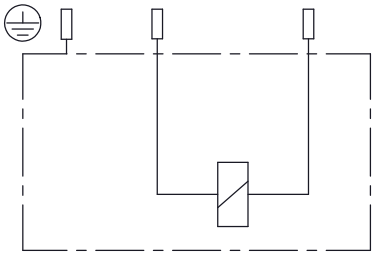

TECHNICAL DATA

Weight:	0.24 kg
HEAT INSULATION CLASS H:	
356°F	(180°C)
Ambient temperature range:	
-22+140°F	(-30+60°C)

Available on request:
Different Voltages -
Different connectors.

Inlet voltage fluctuations must not exceed ± 10% of nominal voltage to obtain correct operation and long life of coils.

Connector Environment Rating: IP65

Winner Coil Using Notice:
Please refer Winner technical information.
(T.101.105.E Winner Coil Using Notice)

CE approved, **UKCA** approved

X	Nominal Power (W) (At rated voltage)	
220	22 Watt.	

∗The nominal power (W) at maximum current with proportional control is 9 watt.

Y	Connections	
H	Connessione A EN 175301-803 ISO 4400 (DIN 43650)	

Z	Voltage (V) Nominal	Resistance (Ω) 20~25 °C	Maximum Current (A) (Proportional Control)	
E	12V DC	6.4±8%	1150 mA	
D	24V DC	26.2±5%	590 mA	