


PRD SERİSİ HİDROLİK İKİZ DİREKT EMNİYET VALFLERİ

PRD serisi Hidrolik İkiz Direkt Emniyet Valfleri çapraz tanklı iki emniyet valfinden oluşur. Bu valf hidrolik motor yada aktüatörün 2 port (çıkış)'un belirli bir ayarda basıncı bloke etmesine yarar. Ani basınç şoklarına karşı ideal bir koruma sağlar. Hidrolik devrede 2 portunda da ayrı ayrı basınç ayarı imkanı sağlar.

Malzeme	Alüminyum
Vida Ölçüsü	BSP (İsteğe Bağlı: NPT, Metrik)
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Isıl İşlem	İç parçalarda
Kullanım Alanı	Genel hidrolik uygulamaları

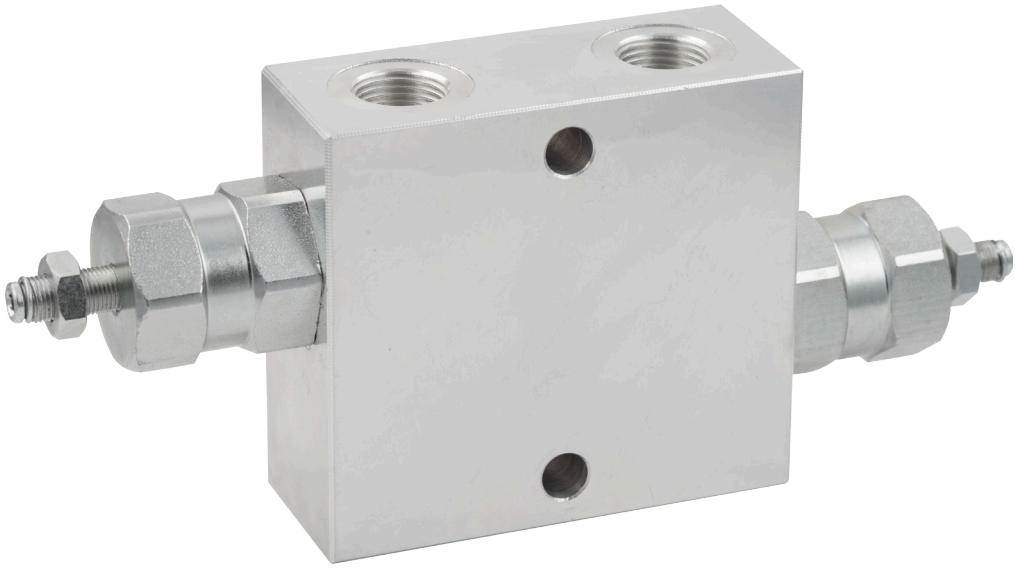


PRD SERIES HYDRAULIC DOUBLE PRESSURE RELIEF VALVES

PRD series Hydraulic Double Pressure Relief Valves consist of two safety valves with cross tanks. This valve serves to block the pressure of 2 ports (output) of the hydraulic motor or actuator at a certain setting. It provides ideal protection against sudden pressure shocks. It provides pressure adjustment at 2 ports in the hydraulic circuit separately.

Material	Aluminium
Thread Size	BSP (Upon Request: NPT, Metric)
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Heat Treatment	Internal parts
Applications	General Hydraulic Applications






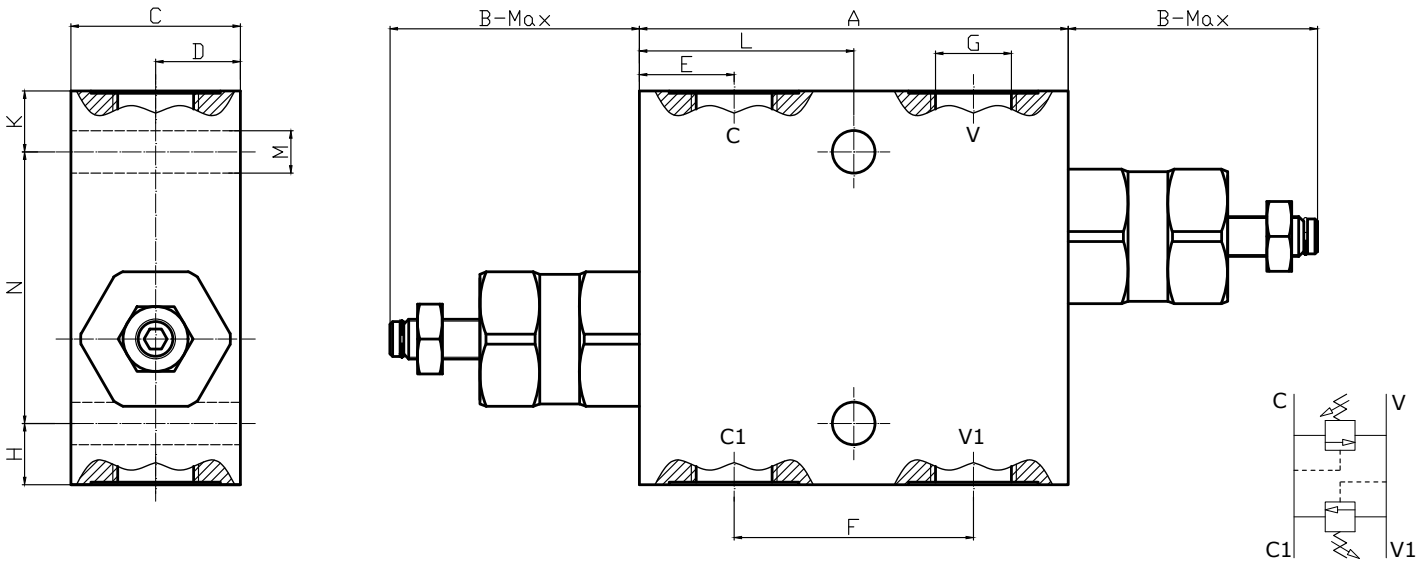

Teknik Özellikler
Technical Specifications

Kod (Code)	Vida Ölçüsü (Thread Type) G	Çalışma Basıncı (Working Pressure) Bar	Max. Yağ Akışı (Max. Flow) L/Min	Ölçüler - mm (Dimensions - mm)										
				A	B	C	D	E	F	H	K	L	M	N
PRDSHG14N	1/4" BSP	50 - 380	45	-	-	-	-	-	-	-	-	-	-	-
PRDSHG38N	3/8" BSP	50 - 380	45	86	50	34	17	19	48	12.25	12.25	43	Ø8.50	54.50
PRDSHG12N	1/2" BSP	50 - 380	45	86	50	34	17	19	48	12.25	12.25	43	Ø8.50	54.50
PRDSHG34N	3/4" BSP	50 - 380	80	-	-	-	-	-	-	-	-	-	-	-

1/4" BSP - 3/8" BSP - 1/2" BSP

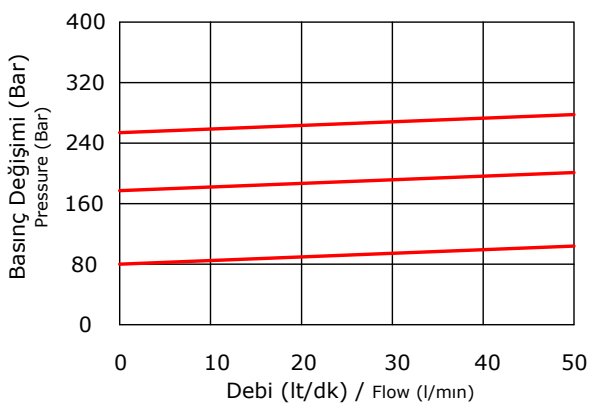

3/4" BSP

