
RELIEF VALVE
(Pilot Operated Balanced Piston)


Ordering Code:	**RP-10W-X-Y-Z**

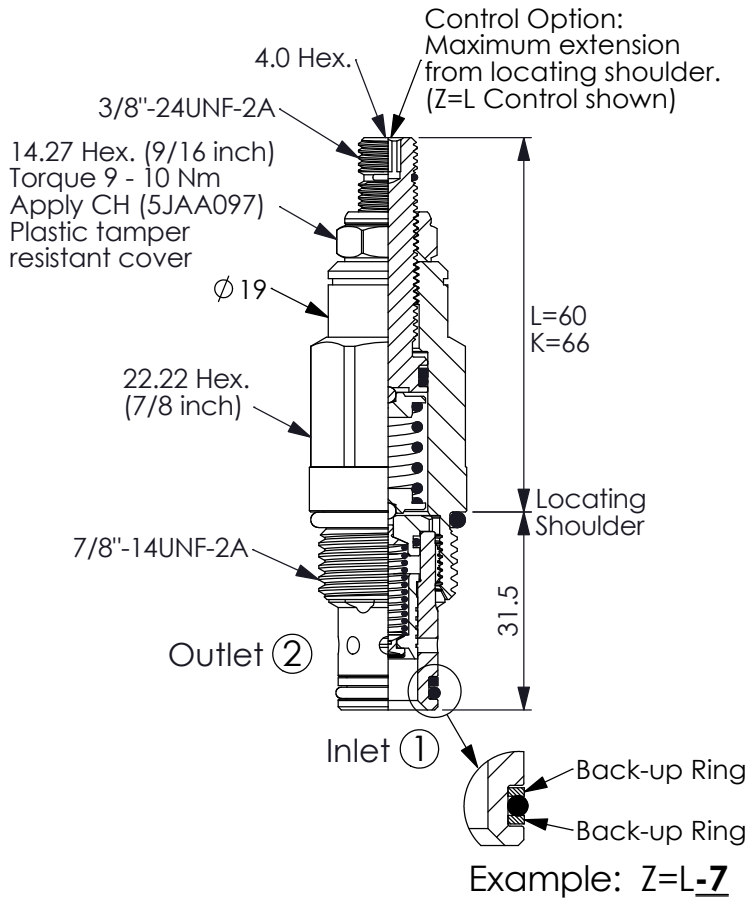

Example: Z=L**-7**


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.

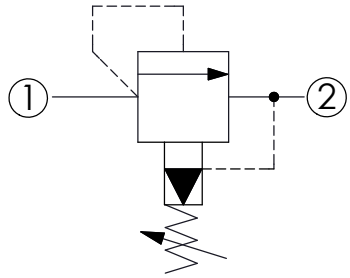

TECHNICAL DATA




Max. Operating pressure:	350	bar
Rated flow:	95	l/min
Cavity-Tooling:	10W-2	
Installation torque:	35 - 45	Nm
Weight:	0.16 (**Z**=L)	kg

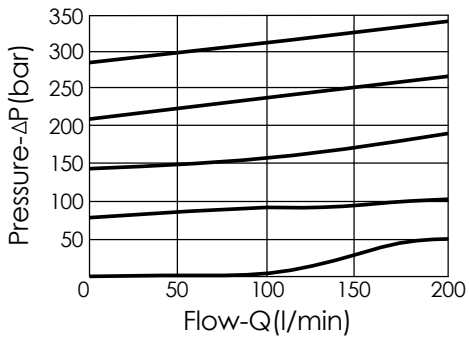

X	**OPERATION**	
20	① to ② (P to T)	

- Response Time-Typical (10 ms)
- Maximum Leakage Approximately (33 cc/min./70 bar)

Y	**SPRINGS** ADJUSTMENT RANGES	
A	7 - 210 bar (70 bar Standard Setting)	
B	3.5 - 105 bar (70 bar Standard Setting)	
C	10.5 - 420 bar (70 bar Standard Setting)	
D	1.7 - 55 bar (28 bar Standard Setting)	
E	1.7 - 28 bar (14 bar Standard Setting)	
H	2 - 210 bar (70 bar Standard Setting)	
W	10.5 - 315 bar (70 bar Standard Setting)	

Z	**OPTIONS**	
L	Leakproof hex. socket screw. 	
L-7	Leakproof hex. socket screw. Double Back-up Ring 	
K	Handknob with Lock Knob. (Order Code: 6ZAK001) 	
C	Stainless Steel Tamper Resistant Cover. 	
BA	Handknob and aluminum locknut. 