

MODULAR MANIFOLDS NG6 (CETOP 3), REAR PORTS




Dimensions in mm (inches)

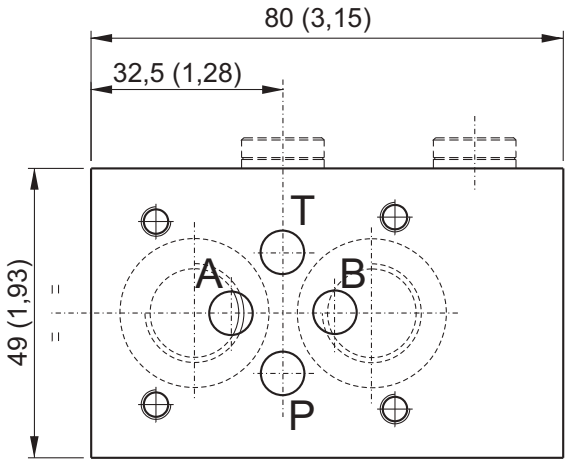

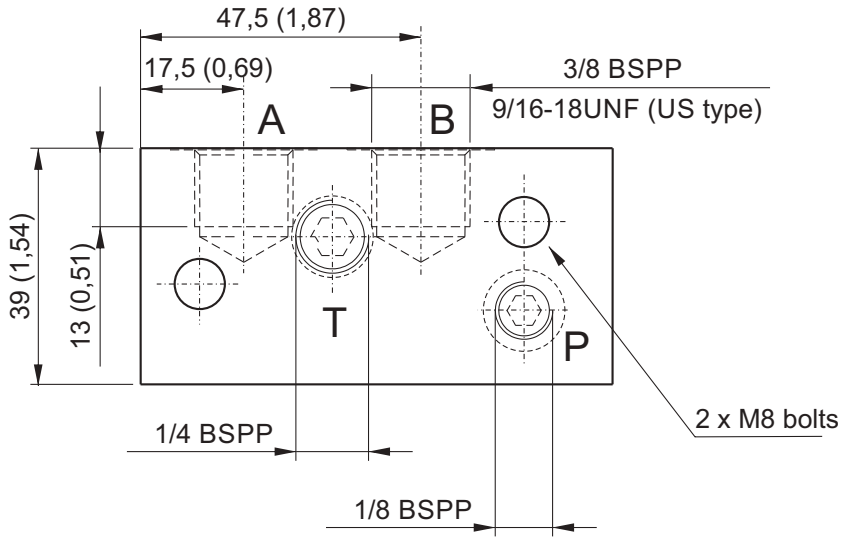


Main features

Max pressure	350 bar
Weight	0,37 Kg (0,82lb)
Fixing bolts	2 M8 tie - rods steel class 8.8 or above



Parallel connection	Spare part code
Rear ports	**E60403001**
Rear ports US execution	**E60403001US**

Option 1/4"BSP P port:



Spare part code
PORTMF0001

Note: Recommended tightening torque for M8 bolts: 16 Nm. Attention! Do not use tie-rods less than 8.8.
*: US execution with 9/16-18UNF SAE06 exit ports
To add external manifolds to a PPC assembly code, just add their spare part codes at the end of the PPC code. eg: PPC-0,8 12DC-MB-J-K0,6-V200-G-RETURN KIT-1,5L+**E60403004**+**E60403001.**
The Cetop attachment is on motor side. With AC motor frames bigger than 71 and DC motors bigger than dia. 125mm, always add a spacer manifold (see E60403004 code in F section) below the Cetop manifold to avoid interference between the valve and the motor.
Code does not include the Cetop solenoid valve. See NG6 (Cetop 3) valves table in section G.