

RELIEF VALVE
(Direct Acting, Guided Poppet)

Ordering Code:	**RD-30R-X-Y-Z**

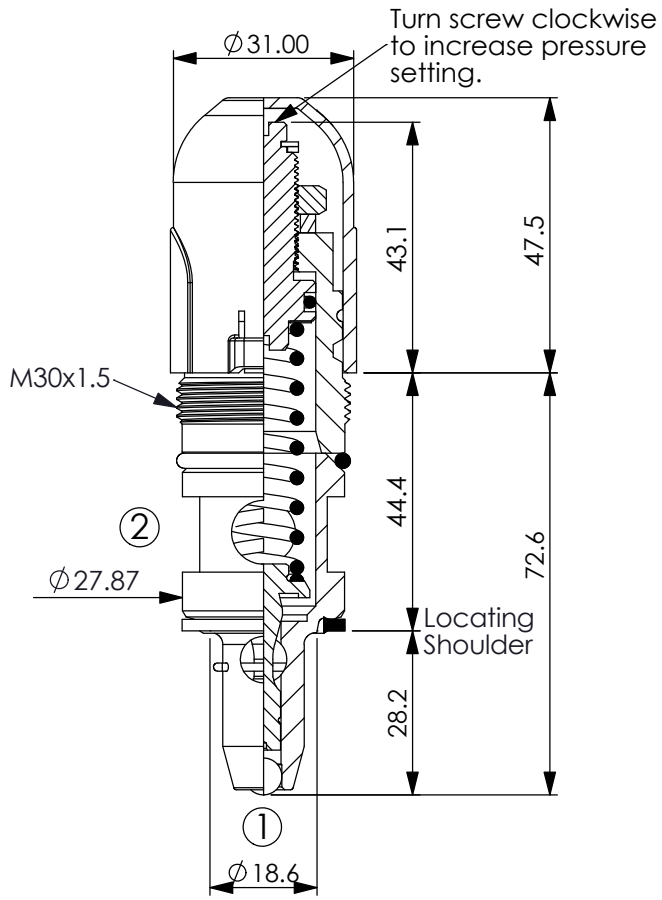


UNIT:mm

Illustrations / detail are for reference only. Data subject to change.



TECHNICAL DATA


Max. Operating pressure:	350	bar
Rated flow:	120	l/min
Cavity-Tooling:	30R-2	
Installation torque:	60 - 70	Nm
Weight:	0.26 (**Z**=L) 0.27 (**Z**=D)	kg

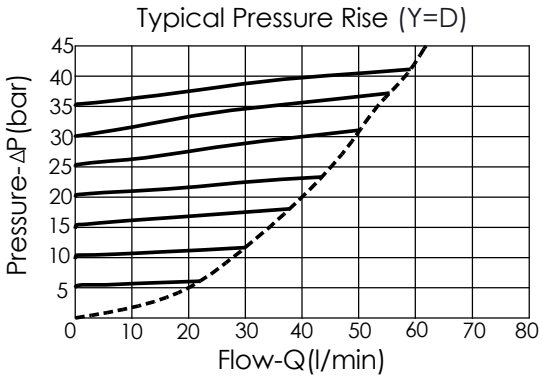

X	OPERATION	
20	① to ② (P to T)	

· Maximum Leakage Approximately (5 drops/min. to 85% of nominal setting)

Y	PRESSURE SETTING	
D	15 - 55 bar (28 bar Standard Setting)	
E	5 - 28 bar (14 bar Standard Setting)	
W	55 - 315 bar (70 bar Standard Setting)	

Z	OPTIONS		
L	Leakproof hex. socket screw.		
D	Plastic Cover.	