BM3...


BM	Multi station subplate (standard versions are supplied in cast iron material)
3	CETOP 3/NG6
**	**50** = Connected in parallel with pressure relief valve and rear connectors **70** = Connected in parallel with pressure relief valve and side connectors **52** = Connected in series with pressure relief valve and rear connectors **72** = Connected in series with pressure relief valve and side connectors **60** = Connected in parallel without pressure relief valve and side connectors
*	No. of valve seats **2 / 3 / 4 / 5 / 6 / 7 / 8**
*	Type of adjustment (omit for BM360 version) **M** = Plastic knob **C** = Grub screw
*	Setting range (omit for BM360 version) **1** = max. 50 bar **(white spring)** **2** = max. 150 bar **(yellow spring)** **3** = max. 320 bar **(green spring)**
**	**00** = No variant **AL** = in aluminium material versions (recommended pressure max. 230 bar)
1	Serial No.

• The minimum permissible setting pressure depending on the spring: see cartridge valve type CMP10... Sect. F 30

F


BM360 CONNECTED IN PARALLEL WITHOUT PRESSURE RELIEF VALVE

Type	A	B	Weight(Kg)
BM360/2	120	108	3,6
BM360/3	170	158	5,1
BM360/4	220	208	6,7
BM360/5	270	258	8.2
BM360/6	320	308	9,7
BM360/7	370	358	11,2
BM360/8	420	408	12,6

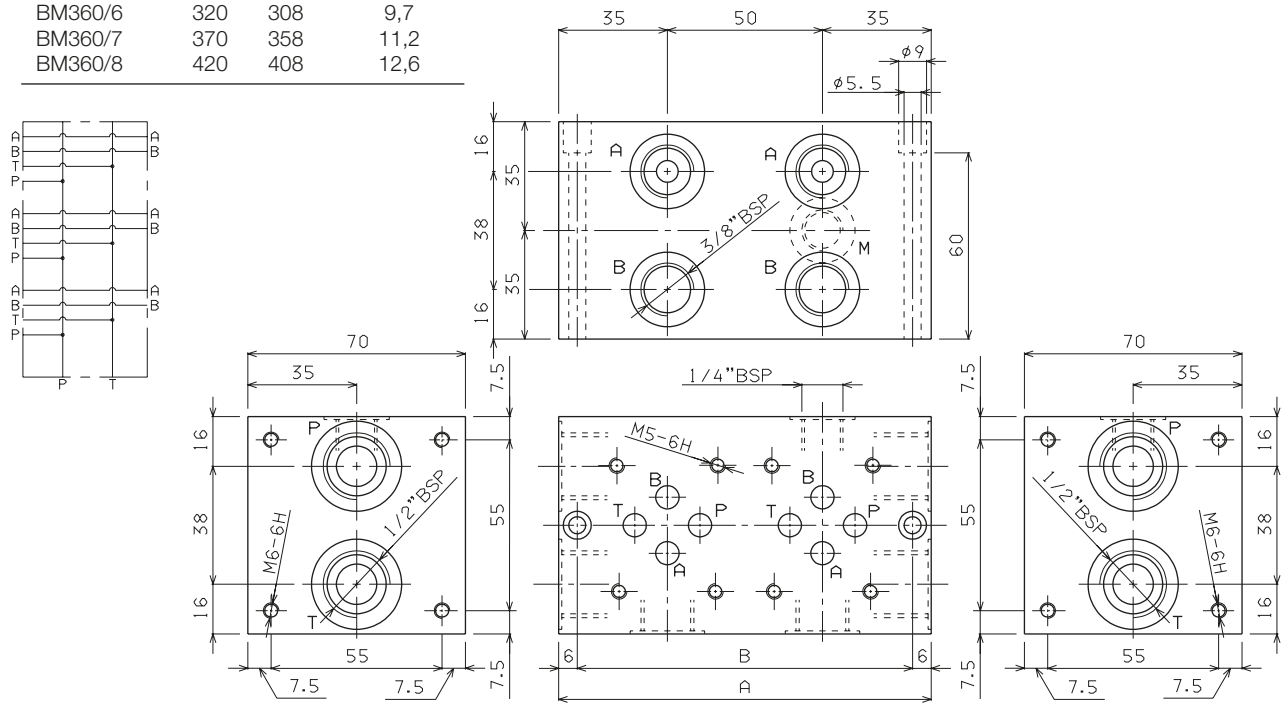

Fixing screws M5x70 ISO 4762


BM350 CONNECTED IN PARALLEL WITH PRESSURE RELIEF VALVE

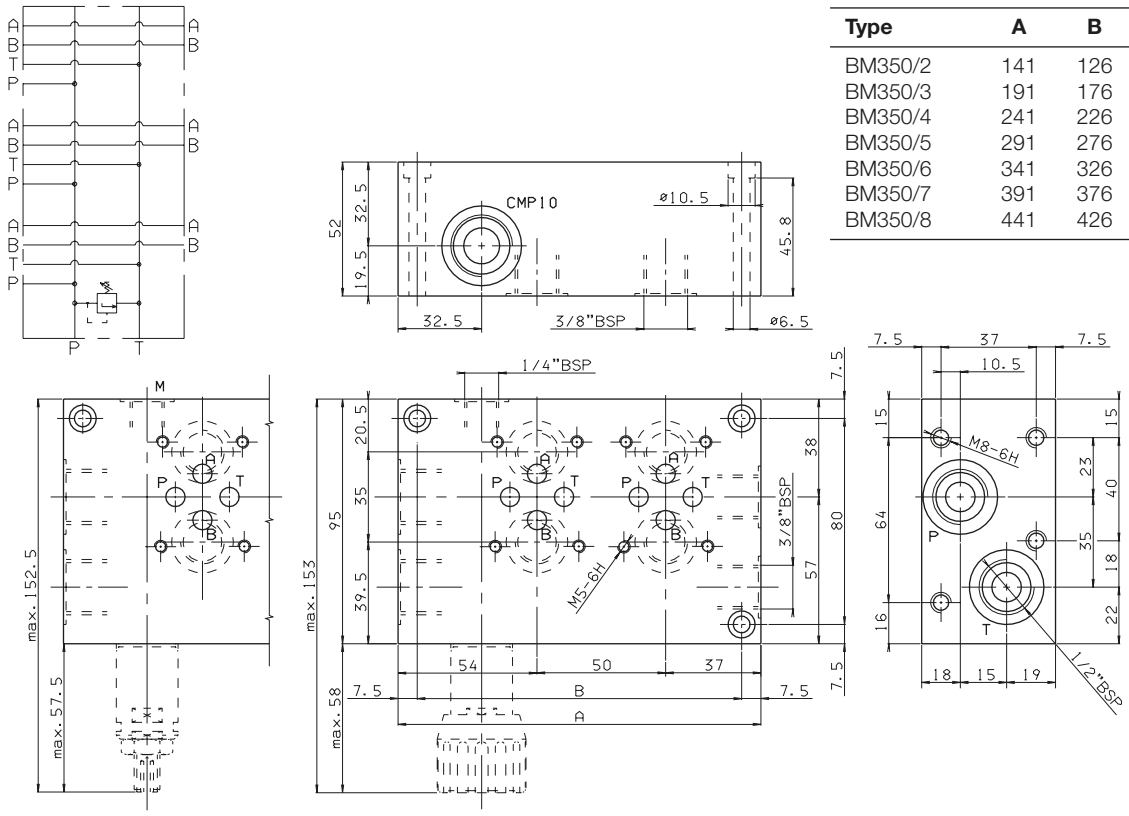

Type	A	B	Weight(Kg)
BM350/2	141	126	4,6
BM350/3	191	176	6,1
BM350/4	241	226	7,6
BM350/5	291	276	9,1
BM350/6	341	326	10,6
BM350/7	391	376	12,1
BM350/8	441	426	13,6

Fixing screws M6x55 ISO 4762

BM370 CONNECTED IN PARALLEL WITH PRESSURE RELIEF VALVE

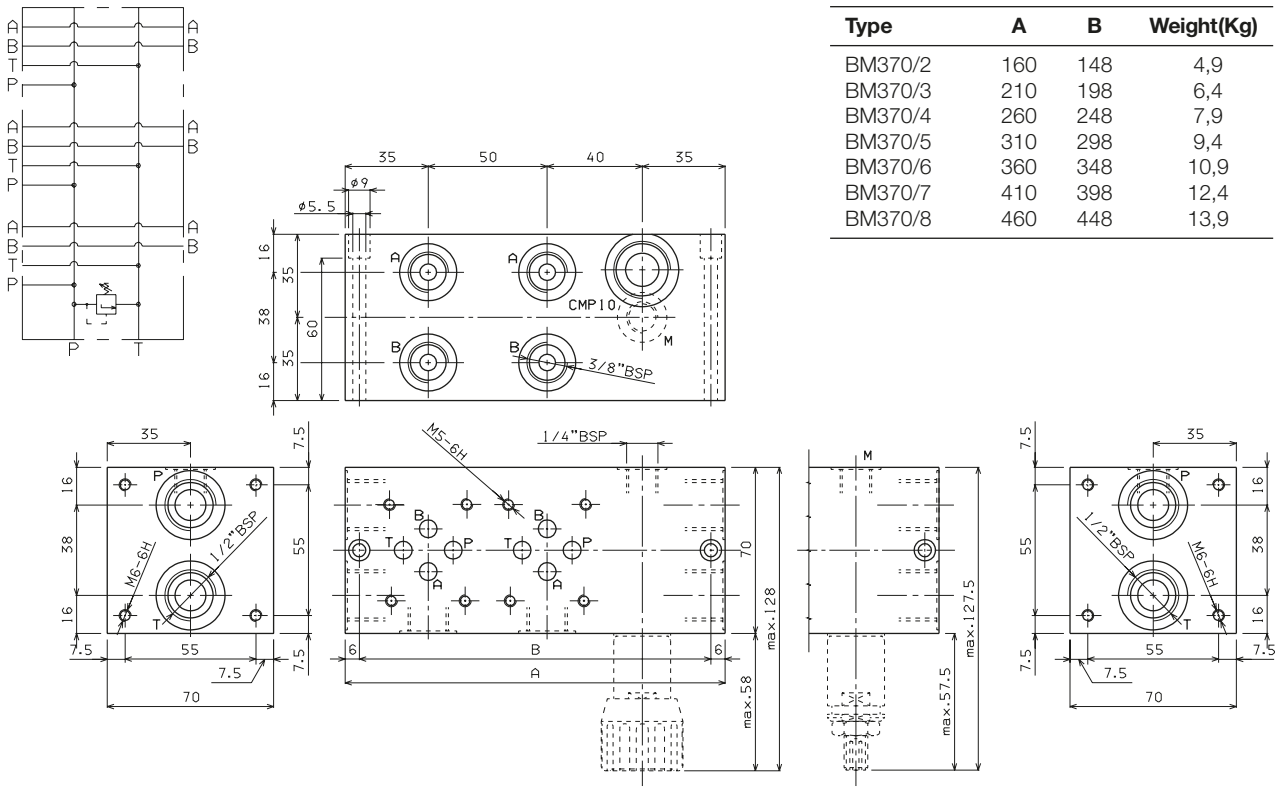


Type	A	B	Weight(Kg)
BM370/2	160	148	4,9
BM370/3	210	198	6,4
BM370/4	260	248	7,9
BM370/5	310	298	9,4
BM370/6	360	348	10,9
BM370/7	410	398	12,4
BM370/8	460	448	13,9

Fixing screws M5x70 ISO 4762

F


BM352 CONNECTED IN SERIES WITH PRESSURE RELIEF VALVE

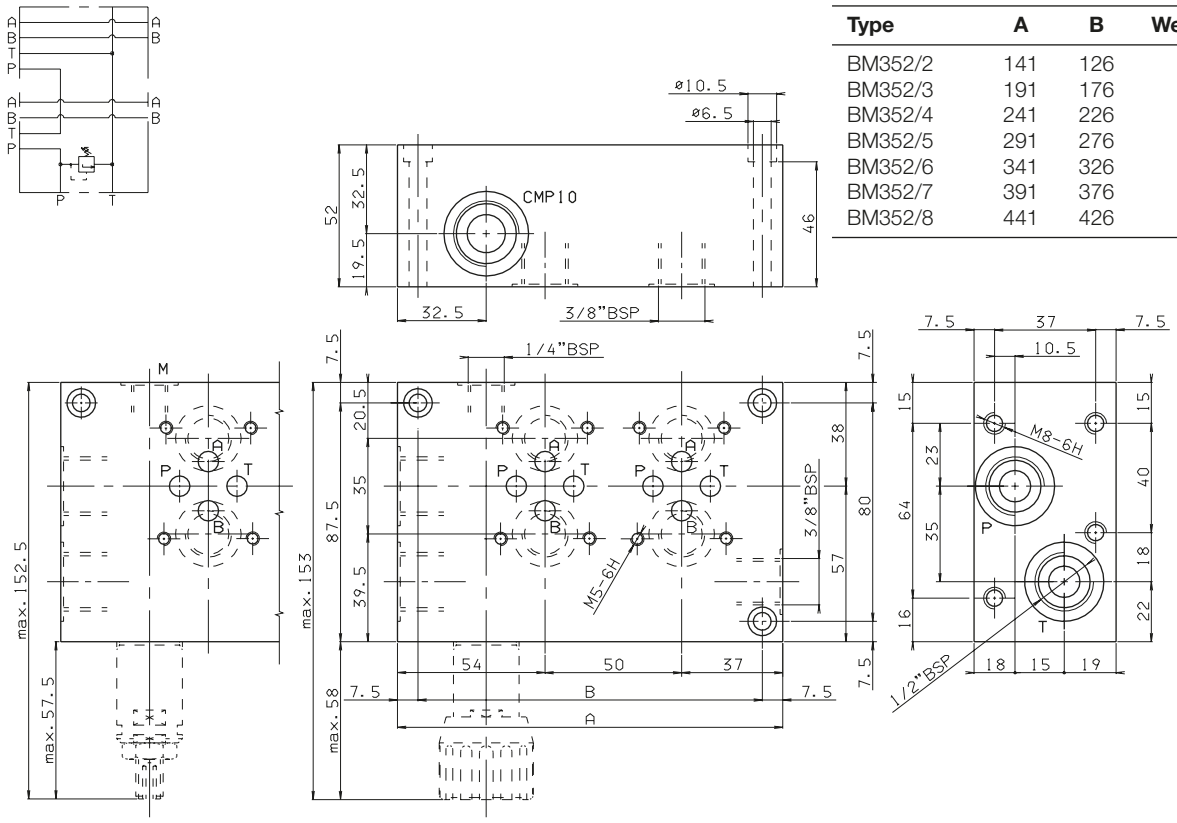

Type	A	B	Weight(Kg)
BM352/2	141	126	4,6
BM352/3	191	176	6,3
BM352/4	241	226	7,6
BM352/5	291	276	9,2
BM352/6	341	326	10,7
BM352/7	391	376	12,2
BM352/8	441	426	13,7

Fixing screws M6x55 ISO 4762

BM372 CONNECTED IN SERIES WITH PRESSURE RELIEF VALVE

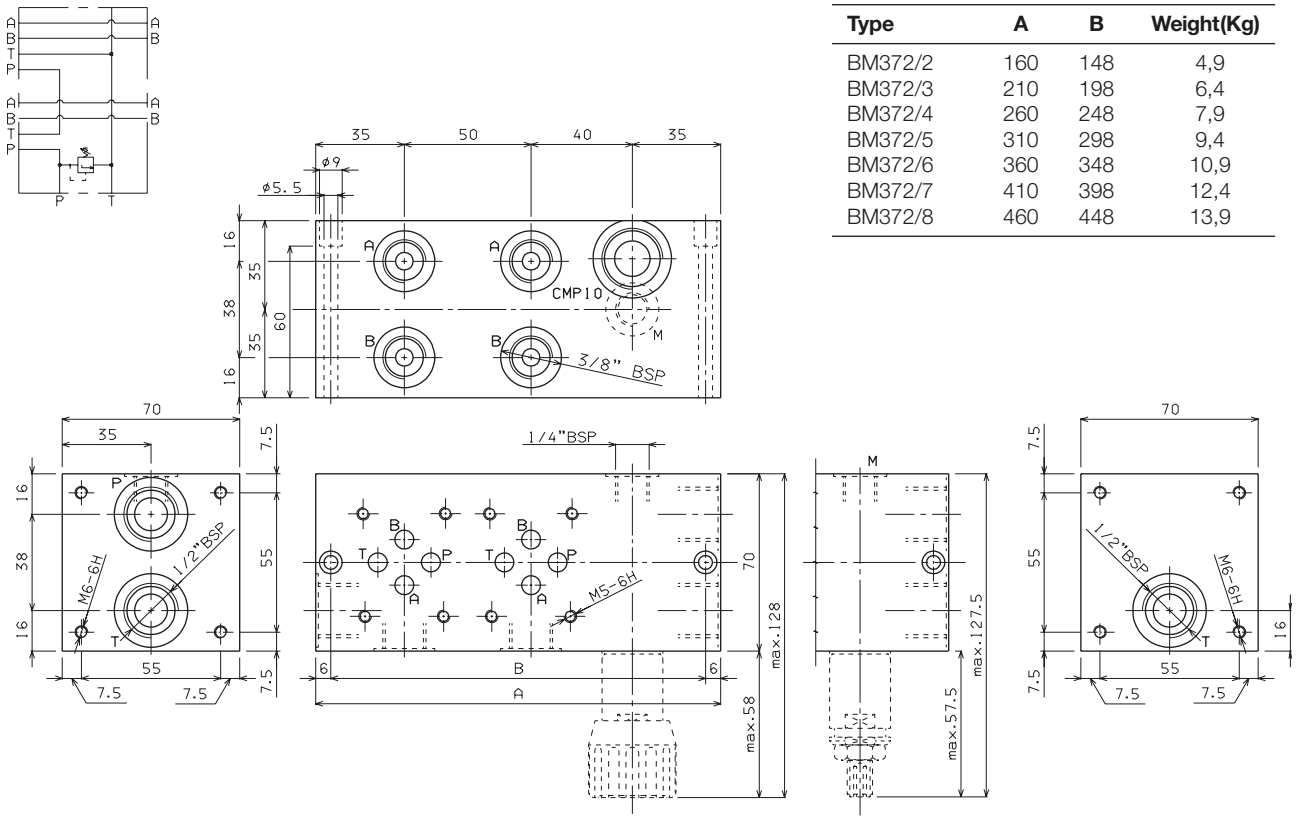

Type	A	B	Weight(Kg)
BM372/2	160	148	4,9
BM372/3	210	198	6,4
BM372/4	260	248	7,9
BM372/5	310	298	9,4
BM372/6	360	348	10,9
BM372/7	410	398	12,4
BM372/8	460	448	13,9

Fixing screws M5x70 ISO 4762