Oil Level Indicator

Monitor the oil level in your machinery.



FEATURES:

- Attaches to drain port, providing a 360° view for oil level measurement and color
- Includes red and green level markers for upper and lower limits or to designate running and idle oil level
- Stainless steel fitting package available
- Option to use with a non-desiccant breather (ND-2) or to create closed loop back to equipment desiccant breather and/or adapter kit with Headspace Vent Kit

MATERIALS & COMPONENTS:

- **Body:** Transparent Polyamide


CHEMICAL COMPATIBILITY

Compatible with all mineral oils and most synthetic oils (Contact Des-Case technical support for chemical compatibility inquiries)

[1]PERFORMANCE SPECIFICATIONS:

Recommended Temperature Range	-40°F to 200°F (-40°C to 93°C)
Maximum Operating Pressure	65 psi (4.48 bar)

[1]**NOTE:** Small variations in the manufacturing process can be common and will be within the allowable engineering tolerances. All above data is nominal and provided for information only and subject to change. All metric conversions are approximate.

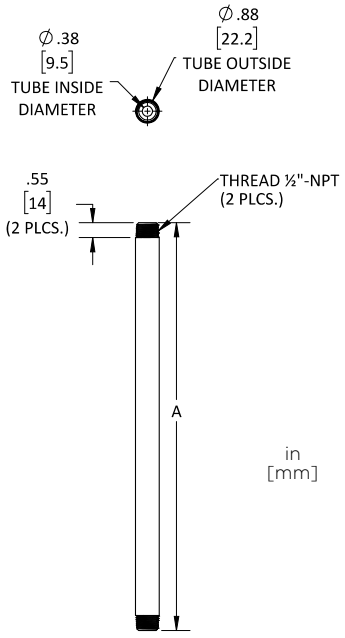

DIMENSIONS:

Part Code	A
	Inch / mm
DC-OLI3	3 / 76.2
DC-OLI6	6 / 152.4
DC-OLI9	9 / 228.6
DC-OLI12	12 / 304.8
DC-OLI5	15 / 381

TS1040_EN_061025

Typical Applications:

- Pumps
- Gearboxes
- Oil Reservoirs

Typical Industries:

- Pulp & Paper
- Food & Beverage
- Petrochemical & Refinery

© 2025 Des-Case Corporation. All rights reserved. Des-Case ® is a registered trademark of Des-Case Corporation.

+1.615.672.8800 • +31 (0) 182.24.48.88