ROSS®

27 Series Classic Valves



Product Catalog

Inline Poppet Valves 27 Series
Product Overview

Directional Control Function

Directional control valves function is to control the direction of flow in the pneumatic circuit. Directional control valves are able to control the way the air passes. These valves can regulate the airflow being capable to stop fluid flow, allow fluid flow, and change the direction of fluid flow. These three functions usually operate in combination.

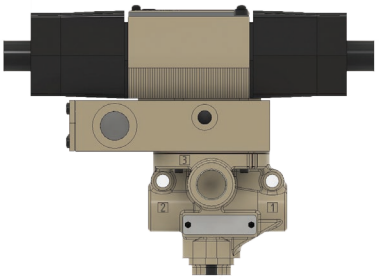
Solenoid Pilot Controlled	Direct Double Solenoid Pilot Controlled	Pressure Controlled
		

Illustration examples.

VALVE FEATURES

Poppet Design	Poppet construction for high dirt tolerance
Mounting Options	Can be mounted close to actuator, reducing length of pipe to be pressurized/exhausted on each cycle
Pilot Supply	Internal or external
High Velocity	Near zero leakage
Positive Sealing	No sliding action to prevent damage and wear
Reliability	Consistent response times over the life of the valve

Explosion-Proof solenoid pilot valves available, see valves for Hazardous Locations.

FM APPROVED

Actuation	Available Inlet Port Sizes									Functions			Maximum Flow C_v (Nl/min)	Page
	1/4	3/8	1/2	3/4	1	1-1/4	1-1/2	2	2-1/2	2/2	3/2	4/2		
Solenoid Pilot Controlled	●	●	●	●	●	●	●	●	●	●	●		71 (70000)	3 – 9
Direct Double Solenoid Controlled	●	●	●	●	●	●	●					●	34 (33000)	10 – 13
Pressure Controlled	●	●	●	●	●	●	●			●	●	●	71 (70000)	14 – 19
Accessories														20 – 21

© 2026, ROSS®. All Rights Reserved.

STANDARD SPECIFICATIONS

GENERAL	Function		2/2 Valve	Normally Closed	
				Normally Open	
			3/2 Valve	Normally Closed	
				Normally Open	
			4/2 Valve		
	Construction Design		Poppet		
	Actuation		Electrical	Solenoid Pilot Controlled	
				Direct Double Solenoid Pilot Controlled	
			Pneumatic	Pressure Controlled	
	Mounting	Type	Inline		
		Orientation	Any, preferably vertical		
	Connection		Threaded Port	NPT	
				G	
	Manual Override (Solenoid Controlled valves)		Flush; rubber, non-locking		
OPERATING CONDITIONS	Temperature	Solenoid Pilot Controlled	Ambient	40° to 120°F (4° to 50°C)	
			Media	40° to 175°F (4° to 80°C)	
		Pressure Controlled	Ambient	40° to 175°F (4° to 80°C)	
			Media		
	Flow Media		Filtered air		
	Operating Pressure		Body Size	3/8 through 1-1/4	15 to 150 psig (1 to 10 bar)
				2	30 to 150 psig (2 to 10 bar)
	Pilot Supply Pressure		Internal	Must meet minimum operating pressure	
			External	Must be equal to or greater than inlet pressure, and meet minimum operating pressure	

ELECTRICAL DATA FOR SOLENOID PILOT VALVES	Solenoids	Current Flow	Operating Voltage	Power Consumption (each solenoid)
		DC	24 volts	14 watts
		AC	110-120 volts, 50/60 Hz	87 VA inrush, 30 VA holding
			230-240 volts, 60 Hz	
		Rated for continuous duty		

CONSTRUCTION MATERIAL	Valve Body	Cast Aluminum	
	Poppet	Acetal and Stainless Steel	
	Seals	Nitrile Rubber	Buna-N

SAFETY DATA	Safety Integrity Level (SIL)	Certified by TÜV Rheinland in accordance to IEC 61508 and IEC 61511 safety integrity level 2 (SIL 2) and EN ISO 13849-1, PL c (with application specific diagnosis) in singular application with HFT = 0 and SIL 3 and PL d in redundant application with HFT≥1, for details see certificate.

IMPORTANT NOTE: Please read carefully and thoroughly all of the CAUTIONS, WARNINGS on the inside back cover.

PRODUCT CREDENTIALS

Safety Integrity Level	Declaration of Conformity		Certificate of Compliance
Per IEC 62061:2001			
SIL 2 Functional Safety	CE	EAC	CSA C US

Ordering Information

2/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 2-Way 2-Position Valves

	27	7	1	B	2001	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Solenoid Pilot

Valve Function	
2/2 Normally Closed	1
2/2 Normally Open	2

Revision Level

Body Size	Port Size In-Out	Internal Pilot Supply	External Pilot Supply
3/8	1/4	2001	2051
	3/8	3001	3051
	1/2	4011	4061
3/4	1/2	4001	4051
	3/4	5001	5051
	1	6011	6061
1-1/4	1	6001	6051
	1-1/4	7001	7051
	1-1/2	8011	8061
2	1-1/2	8001	8051
	2	9001	9051
	2-1/2	9011	9061

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.


Model Number examples: 2771B2001W, D2771B9061Z.

Size		Flow C_v (Nl/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	


* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.


Valve Schematic


Normally Closed



Normally Open



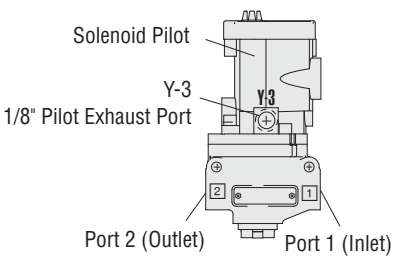

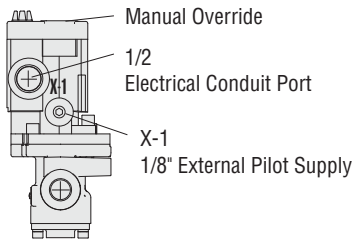


© 2026, ROSS®. All Rights Reserved.


2/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

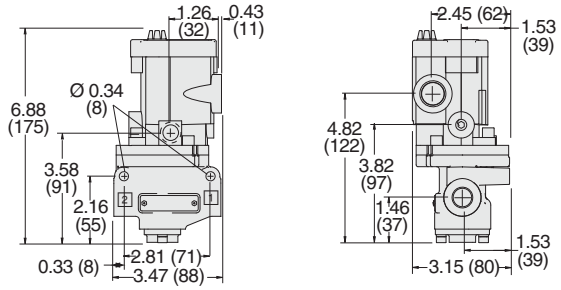


Body Size 3/4

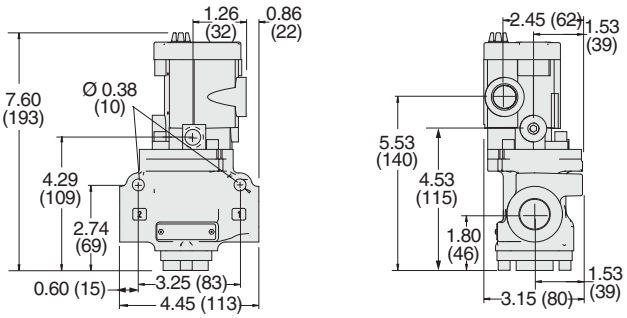

Body Size 1-1/4

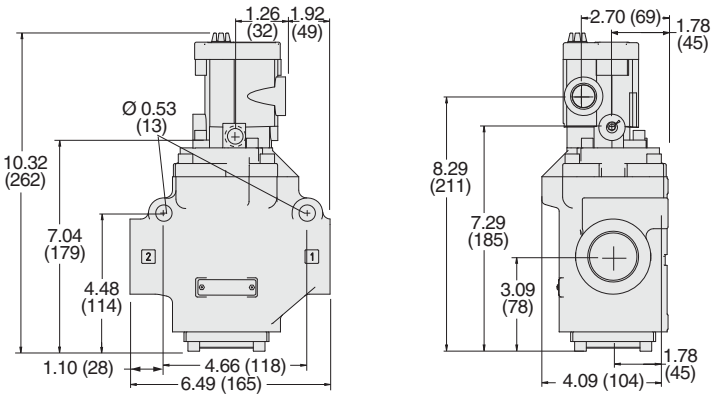

Body Size 2

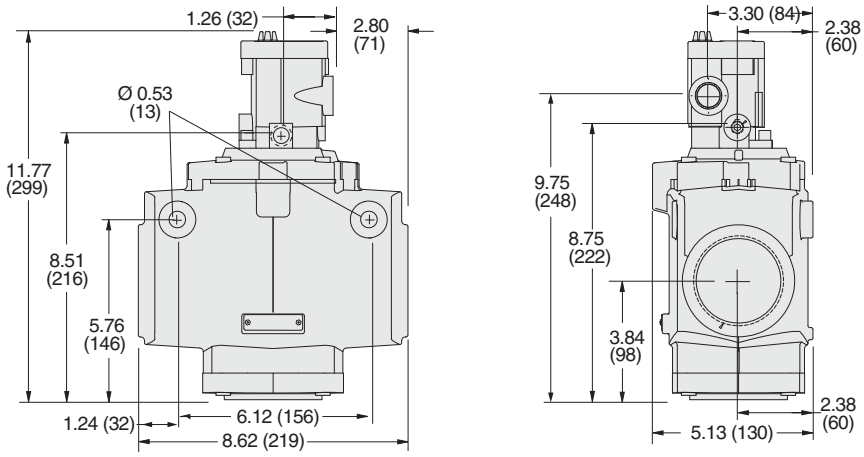

Downloadable CAD models available.

Ordering Information

3/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	7	3	B	2001	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Solenoid Pilot

Valve Function	
3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061
2	1-1/2	2-1/2	8001	8051
	2	2-1/2	9001	9051
	2-1/2	2-1/2	9011	9061

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.


Model Number examples: 2773B2001W, D2773B6061Z.

Size			Flow C_v (Nl/min)				Average Response Constants*					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	2.5 (1.2)
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	11	0.36	0.26	0.45	0.60	
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	11	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	28	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	28	0.15	0.15	0.19	0.16	
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	16.5 (7.4)
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04	
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.50	0.04	


* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.


Valve Schematic


Normally Closed



Normally Open



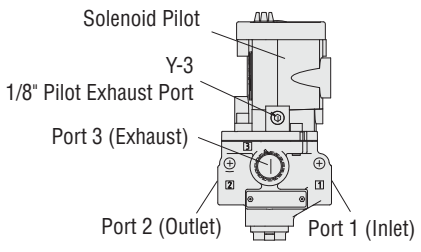

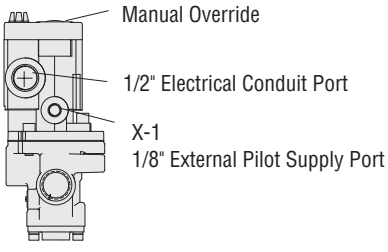


© 2026, ROSS®. All Rights Reserved.


3/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

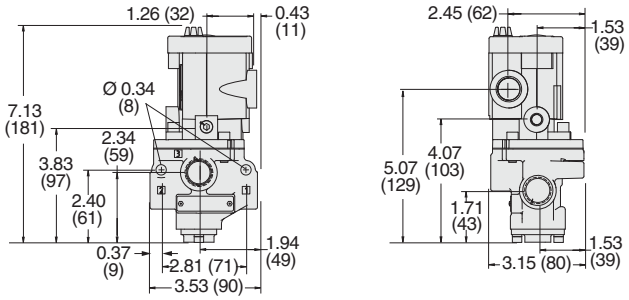


Body Size 3/4

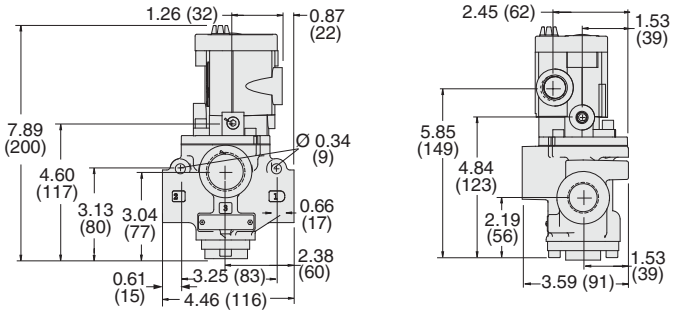

Body Size 1-1/4

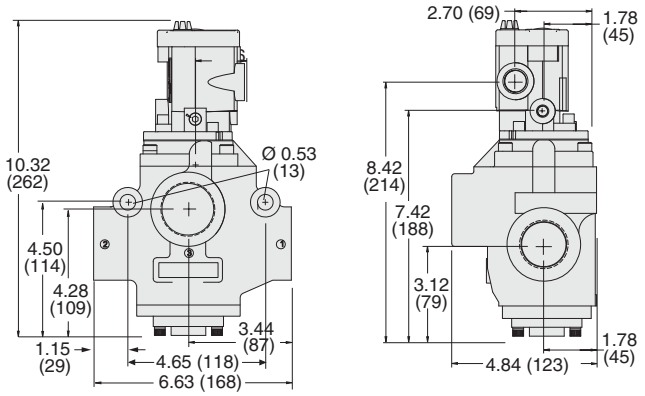

Body Size 2

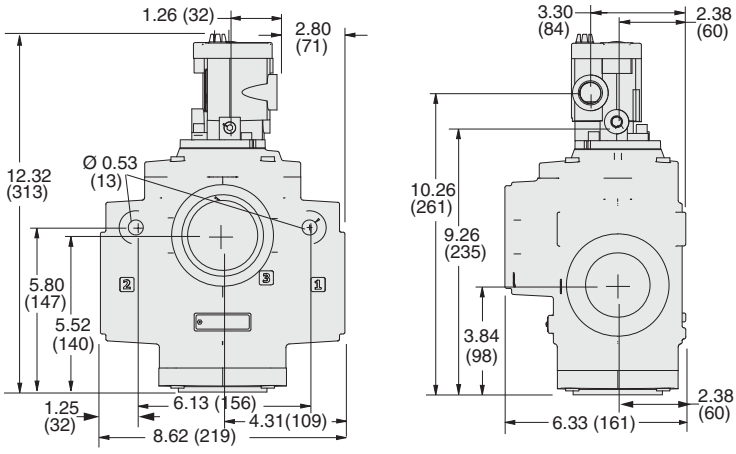

Downloadable CAD models available.

Ordering Information

4/2 Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

	27	7	6	B	2001	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Solenoid Pilot

Valve Function
4/2

Revision Level

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.


Body Size	Port Size		Internal Pilot Supply	External Pilot Supply
	In-Out	Exhaust		
3/8	1/4	1/2	2001	2051
	3/8	1/2	3001	3051
	1/2	1/2	4011	4061
3/4	1/2	1	4001	4051
	3/4	1	5001	5051
	1	1	6011	6061
1-1/4	1	1-1/2	6001	6051
	1-1/4	1-1/2	7001	7051
	1-1/2	1-1/2	8011	8061


Model Number examples: 2776B2001W, D2776B92051Z.

Size			Flow C_v (Nl/min)				Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2	2-3	1-4	4-3	M	F		
								1-2, 1-4	4-3, 2-3	
3/8	1/4	1/2	1.7 (1700)	2.3 (2300)	1.8 (1800)	2.8 (2800)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.6 (2600)	3.3 (3200)	2.9 (2900)	3.9 (3800)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.2 (4100)	4.2 (4100)	5.2 (5100)	10	0.89	0.73	
3/4	1/2	1	5.7 (5600)	7.0 (6900)	5.5 (5400)	7.3 (7200)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.4 (7300)	7.0 (6900)	7.3 (7200)	9.5 (9300)	26	0.36	0.55	
	1	1	7.9 (7800)	8.0 (7900)	8.0 (7900)	11 (11000)	26	0.35	0.50	
1-1/4	1	1-1/2	13 (13000)	21 (21000)	18 (18000)	22 (22000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	16 (16000)	22 (22000)	25 (25000)	26 (26000)	79	0.16	0.18	
	1-1/2	1-1/2	16 (16000)	22 (22000)	26 (26000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



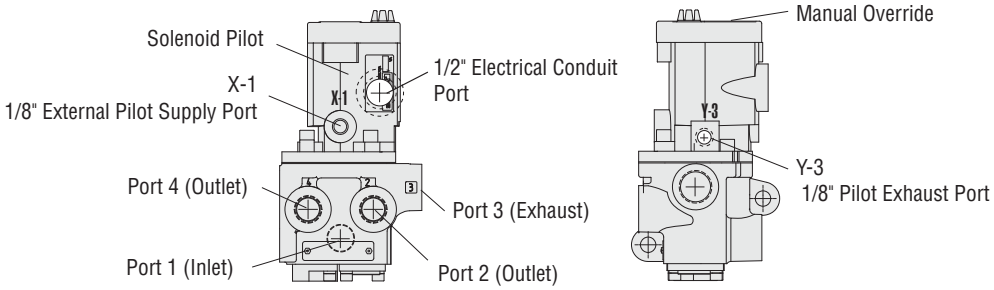


© 2026, ROSS®. All Rights Reserved.


4/2 Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

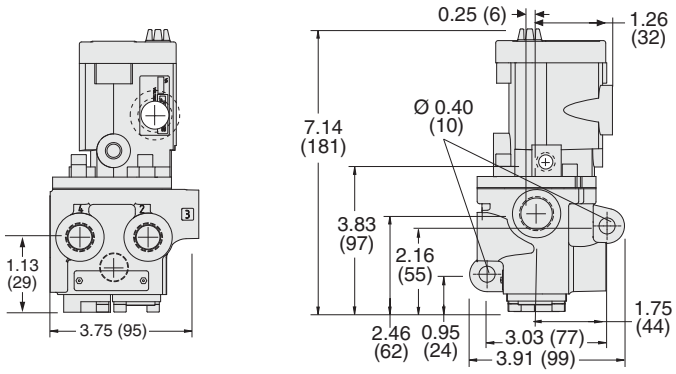

Body Size 3/4

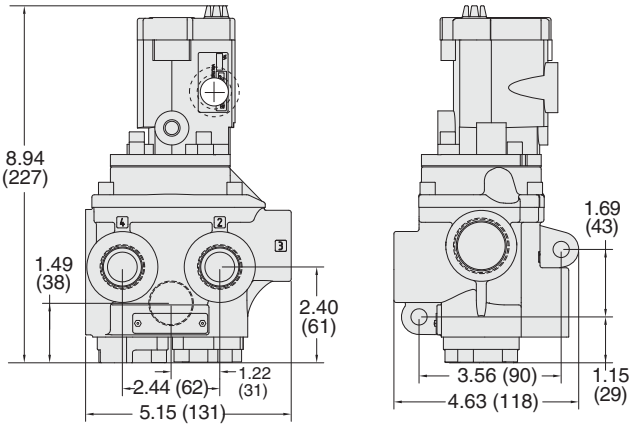

Body Size 1-1/4

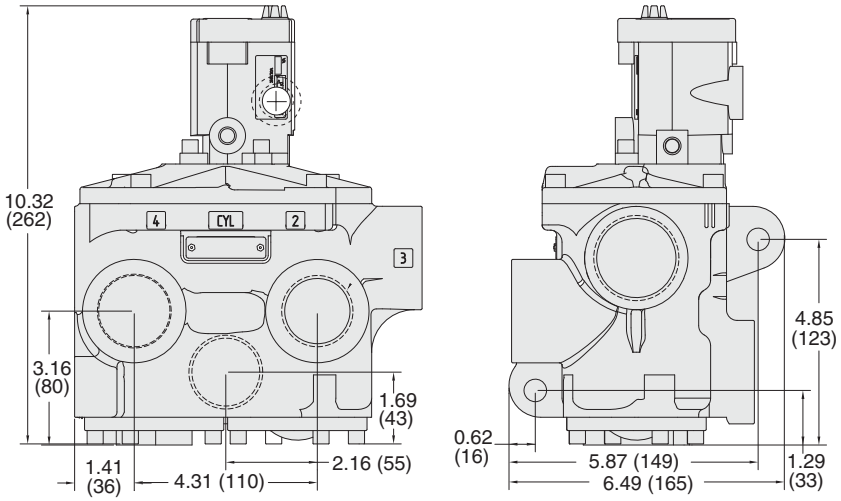

Downloadable CAD models available.

Ordering Information

3/2 Direct Double Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	7	3	B	2003	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Direct Solenoid Controlled

Valve Function	
3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013

* For models with external pilot supply consult ROSS.

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.


Model Number examples: 2773B2003W, D2773B8003Z.

Size			Flow C_v (Nl/min)				Average Response Constants*					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	2.5 (2500)	3.1 (3100)	2.3 (2300)	2.7 (2700)	10	0.90	0.80	0.99	0.88	2.5 (1.2)
	3/8	1/2	3.6 (3500)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.3 (3200)	5.3 (5200)	2.8 (2800)	3.2 (3100)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.3 (6200)	9.2 (9100)	6.3 (6200)	8.0 (7900)	11	0.43	0.27	0.46	0.60	3.3 (1.5)
	3/4	1	7.7 (7600)	11 (11000)	6.9 (6800)	7.4 (7300)	11	0.36	0.26	0.45	0.60	
	1	1	8.0 (7900)	12 (12000)	6.8 (6700)	7.5 (7400)	11	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	23 (23000)	34 (33000)	17 (17000)	24 (24000)	28	0.17	0.14	0.20	0.17	7.0 (3.2)
	1-1/4	1-1/2	30 (30000)	32 (31000)	19 (19000)	24 (24000)	28	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	31 (31000)	19 (19000)	23 (23000)	28	0.15	0.15	0.19	0.16	


* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.


Valve Schematic


Normally Closed



Normally Open



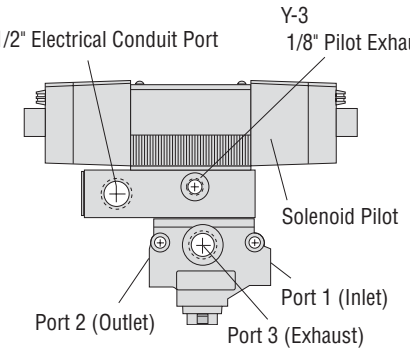




© 2026, ROSS®. All Rights Reserved.


3/2 Direct Double Solenoid Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

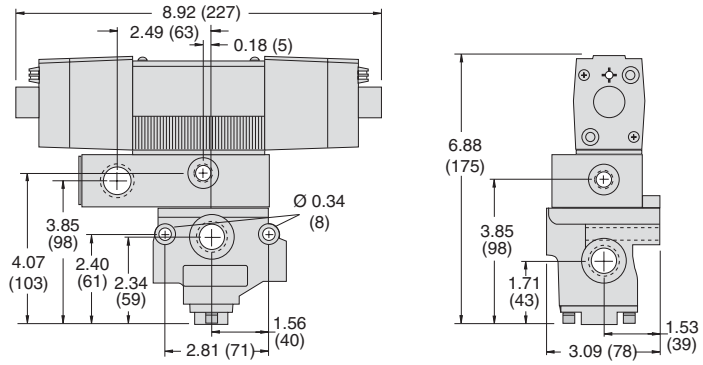

Body Size 3/4

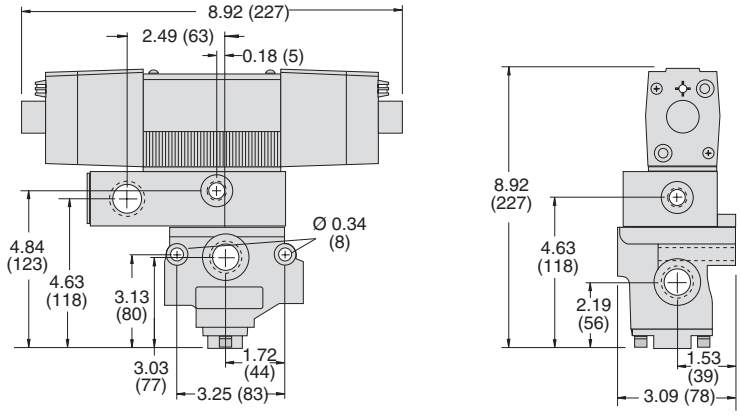

Body Size 1-1/4

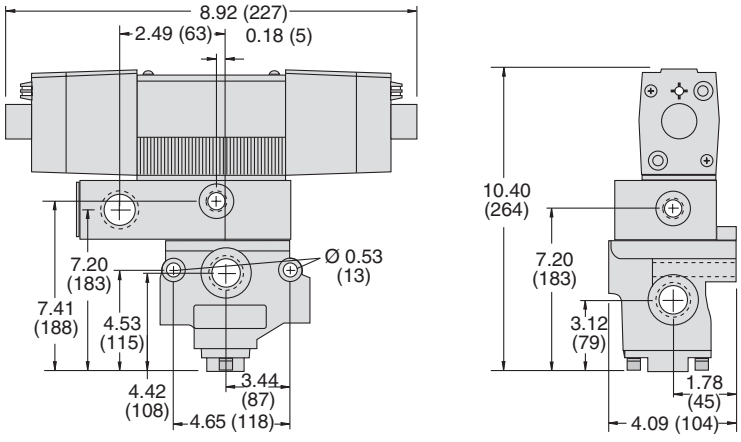

Downloadable CAD models available.

Ordering Information

4/2 Direct Double Solenoid Pilot Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

	27	7	6	B	2003	W

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Direct Solenoid Controlled

Valve Function
4/2

Revision Level

Current	Voltage*	
DC	24 V	W
AC	110-120 V, 50/60 Hz	Z
	230-250 V, 60 Hz	Y

* For other voltages consult ROSS.

Body Size	Port Size		Internal Pilot Supply*
	In-Out	Exhaust	
3/8	1/4	1/2	2003
	3/8	1/2	3003
	1/2	1/2	4013
3/4	1/2	1	4003
	3/4	1	5003
	1	1	6013
1-1/4	1	1-1/2	6003
	1-1/4	1-1/2	7003
	1-1/2	1-1/2	8013


* For models with external pilot supply consult ROSS.


Model Number examples: 2776B2003W, D2776B8003Z.

Size			Flow C_v (Nl/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2, 1-4	4-3, 2-3	M	F 1-2, 1-4	F 4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	3.0 (1.4)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	5.3 (2.4)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9900)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.17	0.22	11.3 (5.1)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.16	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



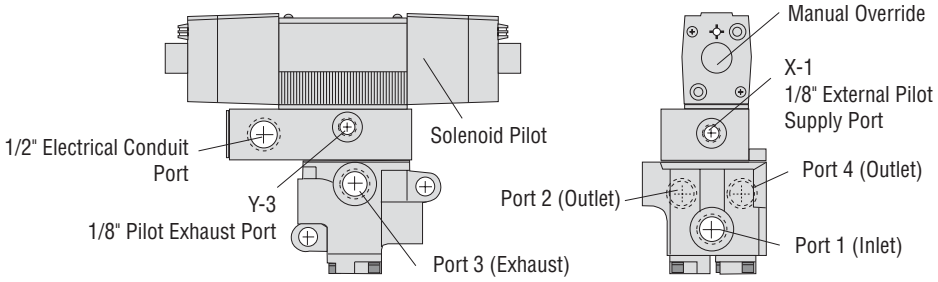


© 2026, ROSS®. All Rights Reserved.


4/2 Direct Double Solenoid Pilot Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

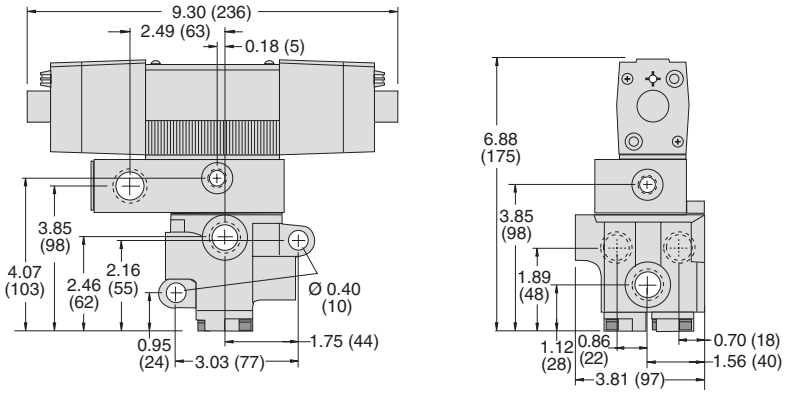

Body Size 3/4

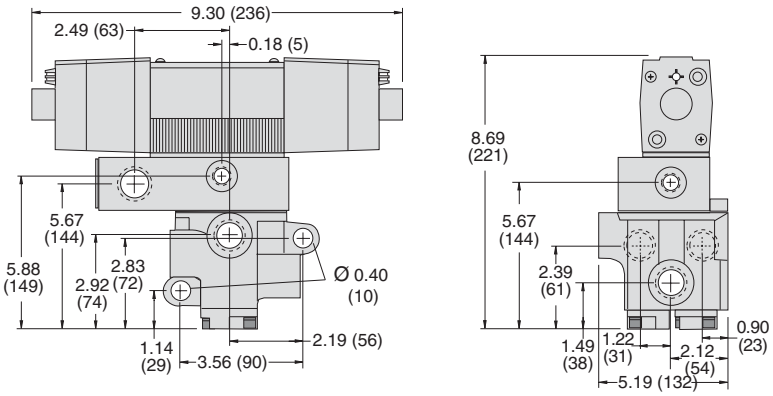

Body Size 1-1/4

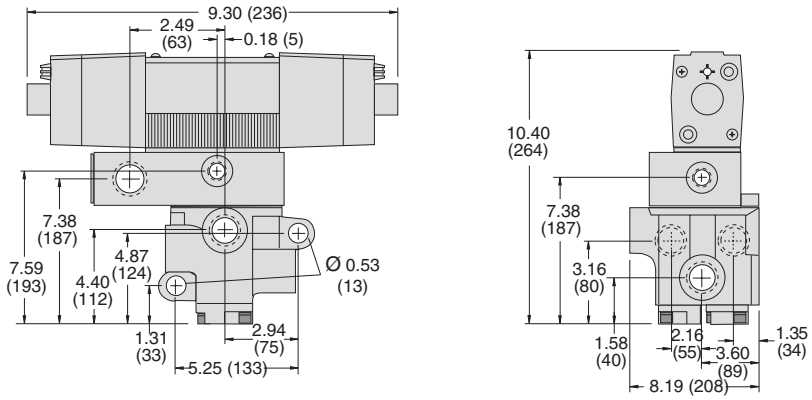

Downloadable CAD models available.

Ordering Information

2/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 2-Way 2-Position Valves

	27	5	1	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function	
2/2 Normally Closed	1
2/2 Normally Open	2

Revision Level



Body Size	Port Size In-Out	
3/8	1/4	2001
	3/8	3001
	1/2	4011
3/4	1/2	4001
	3/4	5001
	1	6011
1-1/4	1	6001
	1-1/4	7001
	1-1/2	8011
2	1-1/2	8001
	2	9001
	2-1/2	9011


Model Number examples: 2751A2001, D2751A6001.

Size		Flow C_V (Nl/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2	Normally Closed (NC)	Normally Open (NO)	M	F		
		1-2	1-2		NC	NO	
3/8	1/4	1.8 (1800)	1.8 (1800)	10	0.91	0.91	2.5 (1.2)
	3/8	3.2 (3100)	2.9 (2800)	10	0.70	0.76	
	1/2	3.9 (3800)	3.4 (3300)	10	0.64	0.72	
3/4	1/2	7.2 (7100)	6.5 (6400)	14	0.37	0.43	3.3 (1.5)
	3/4	9.1 (9000)	8.2 (8100)	14	0.34	0.39	
	1	9.9 (9700)	8.2 (8100)	14	0.34	0.37	
1-1/4	1	21 (21000)	21 (21000)	26	0.17	0.17	7.0 (3.2)
	1-1/4	30 (31000)	22 (22000)	26	0.15	0.19	
	1-1/2	32 (31000)	24 (24000)	26	0.15	0.18	
2	1-1/2	46 (45000)	46 (45000)	41	0.09	0.09	15.5 (6.9)
	2	59 (58000)	58 (57000)	41	0.07	0.07	
	2-1/2	66 (65000)	60 (59000)	41	0.07	0.06	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic

Normally Closed	Normally Open
	





© 2026, ROSS®. All Rights Reserved.

2/2 Pressure Controlled Valves


DIMENSIONS	Inches (mm)


Body Size 3/8







Body Size 3/4







Body Size 1-1/4

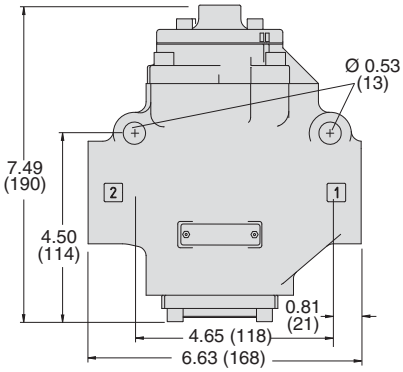

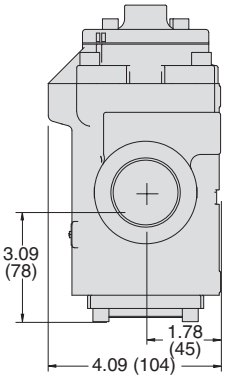

Body Size 2

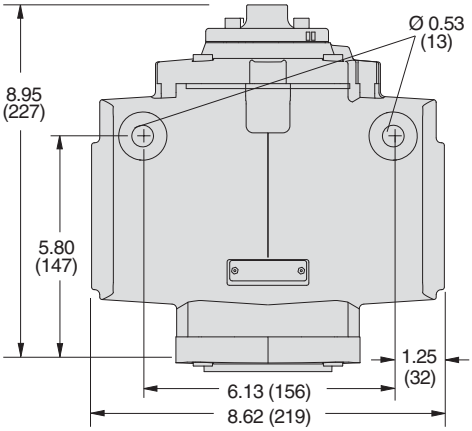

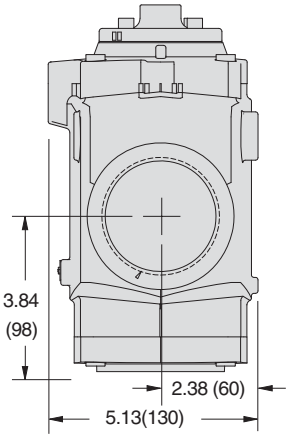

Downloadable CAD models available.

Ordering Information

3/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 3-Way 2-Position Valves

	27	5	3	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function	
3/2 Normally Closed	3
3/2 Normally Open	4

Revision Level

Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011
2	1-1/2	2-1/2	8001
	2	2-1/2	9001
	2-1/2	2-1/2	9011


Model Number examples: 2753A2001, D2753A6001.

Size			Flow C_v (Nl/min)				Average Response Constants*					≈ Weight lb (kg)
Body	Port 1, 2	Port 3	Normally Closed (NC)		Normally Open (NO)		M	F				
								NC		NO		
			1-2	2-3	1-2	2-3		1-2	2-3	1-2	2-3	
3/8	1/4	1/2	1.9 (1900)	3.3 (3200)	1.7 (1700)	3.0 (3000)	10	0.90	0.80	0.99	0.88	1.3 (0.6)
	3/8	1/2	2.9 (2800)	4.4 (4300)	2.8 (2800)	3.0 (3000)	10	0.70	0.50	0.90	0.77	
	1/2	1/2	3.8 (3800)	5.0 (4900)	3.0 (3000)	3.0 (3000)	10	0.75	0.50	0.90	0.76	
3/4	1/2	1	6.2 (6100)	9.4 (9300)	6.1 (6000)	8.0 (7900)	12	0.43	0.17	0.46	0.60	2.0 (0.9)
	3/4	1	8.2 (8100)	10 (9800)	7.7 (7600)	8.0 (7900)	12	0.36	0.26	0.45	0.60	
	1	1	9.1 (9000)	12 (12000)	8.3 (8200)	8.0 (7900)	12	0.34	0.25	0.40	0.59	
1-1/4	1	1-1/2	21 (21000)	27 (27000)	18 (18000)	20 (20000)	32	0.17	0.14	0.20	0.17	6.0 (2.7)
	1-1/4	1-1/2	29 (29000)	29 (29000)	21 (21000)	22 (22000)	32	0.15	0.15	0.19	0.17	
	1-1/2	1-1/2	30 (30000)	30 (30000)	21 (21000)	25 (25000)	32	0.15	0.15	0.19	0.16	
2	1-1/2	2-1/2	45 (44000)	75 (74000)	45 (44000)	53 (52000)	76	0.05	0.04	0.07	0.04	15.3 (6.9)
	2	2-1/2	57 (56000)	78 (77000)	55 (54000)	61 (60000)	76	0.05	0.04	0.05	0.04	
	2-1/2	2-1/2	66 (65000)	82 (81000)	61 (60000)	71 (70000)	76	0.05	0.04	0.05	0.04	


* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.


Valve Schematic

Normally Closed



Normally Open



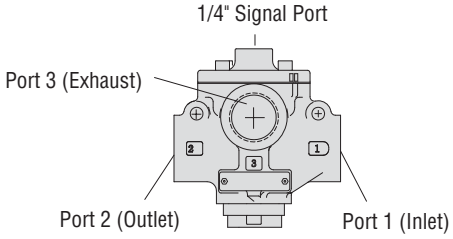


© 2026, ROSS®. All Rights Reserved.


3/2 Pressure Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

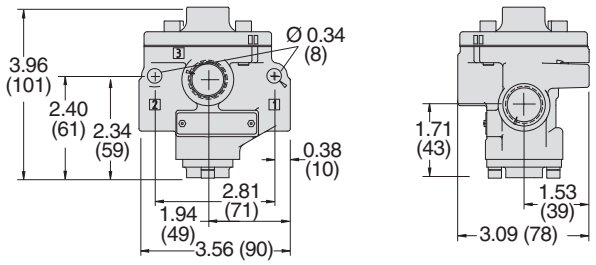


Body Size 3/4

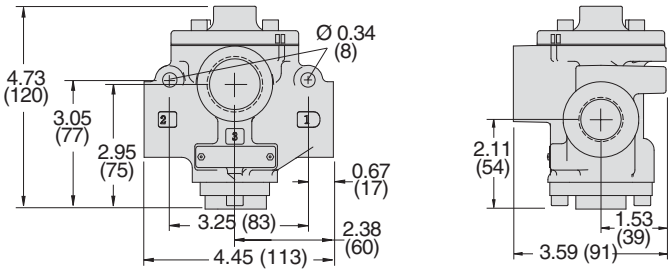

Body Size 1-1/4

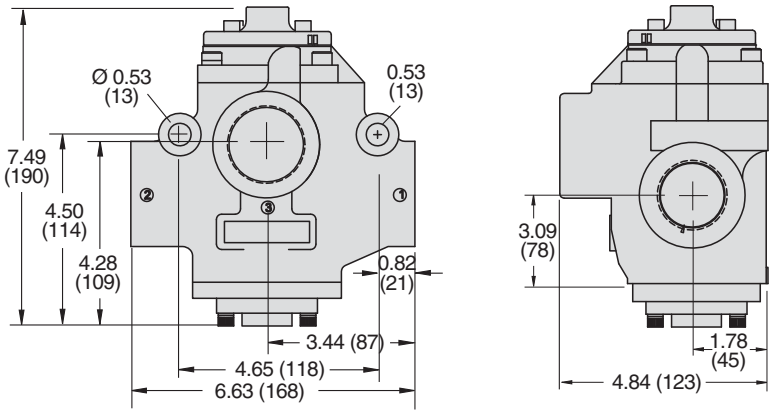

Body Size 2

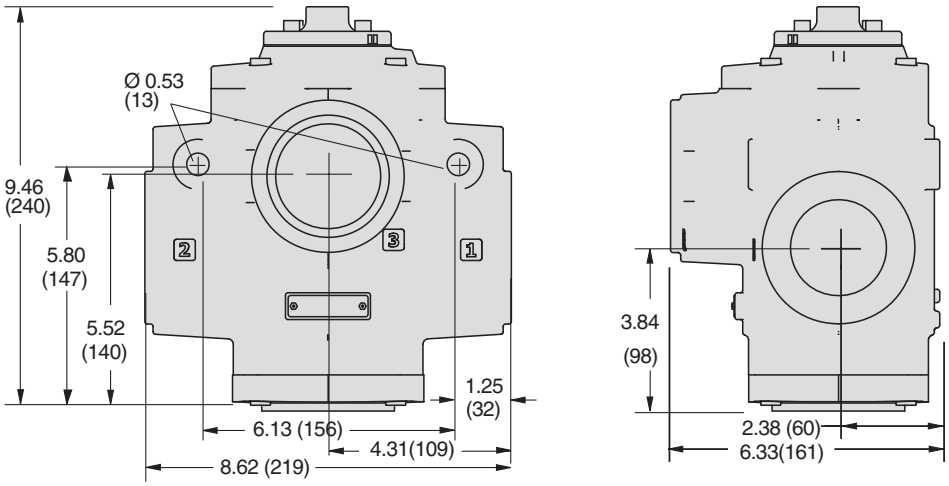

Downloadable CAD models available.

Ordering Information

4/2 Pressure Controlled Valves

MODEL NUMBER CONFIGURATOR — 4-Way 2-Position Valves

		27	5	6	A	2001

Port Thread	
NPT Leave Blank	
G	D

Series

Actuation
Pressure Controlled

Valve Function
4/2

Revision Level


Body Size	Port Size		
	In-Out	Exhaust	
3/8	1/4	1/2	2001
	3/8	1/2	3001
	1/2	1/2	4011
3/4	1/2	1	4001
	3/4	1	5001
	1	1	6011
1-1/4	1	1-1/2	6001
	1-1/4	1-1/2	7001
	1-1/2	1-1/2	8011


Model Number examples: 2756A2001, D2756A2001.

Size			Flow C_V (Nl/min)		Average Response Constants*			≈ Weight lb (kg)
Body	Port 1, 2, 4	Port 3	1-2, 1-4	4-3, 2-3	M	F 1-2, 1-4	F 4-3, 2-3	
3/8	1/4	1/2	2.1 (2100)	2.9 (2900)	10	0.92	0.92	1.8 (0.8)
	3/8	1/2	2.9 (2900)	4.2 (4100)	10	0.90	0.90	
	1/2	1/2	3.1 (3100)	4.3 (4200)	10	0.89	0.73	
3/4	1/2	1	5.6 (5500)	8.1 (8000)	26	0.50	0.66	4.3 (1.9)
	3/4	1	7.0 (6900)	9.3 (9200)	26	0.36	0.55	
	1	1	7.8 (7700)	10 (9800)	26	0.35	0.50	
1-1/4	1	1-1/2	19 (19000)	26 (26000)	79	0.22	0.22	10.3 (4.6)
	1-1/4	1-1/2	21 (21000)	27 (27000)	79	0.18	0.18	
	1-1/2	1-1/2	22 (22000)	27 (27000)	79	0.15	0.15	

* **Valve Response Time** – Response Time (msec) = M + (F • V). This is the average time required to fill a volume V (cubic inches) to 90% of supply pressure or to exhaust it to 10% of supply pressure. M and F values are shown above.

Valve Schematic



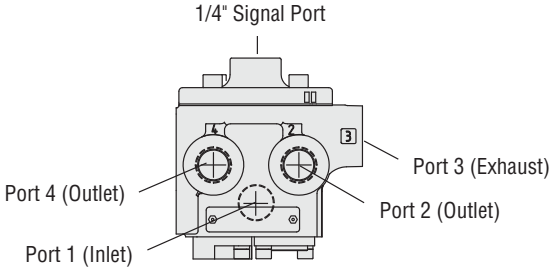


© 2026, ROSS®. All Rights Reserved.


4/2 Pressure Controlled Valves

DIMENSIONS	Inches (mm)


Body Size 3/8

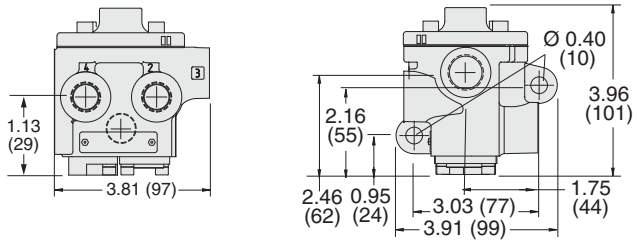

Body Size 3/4

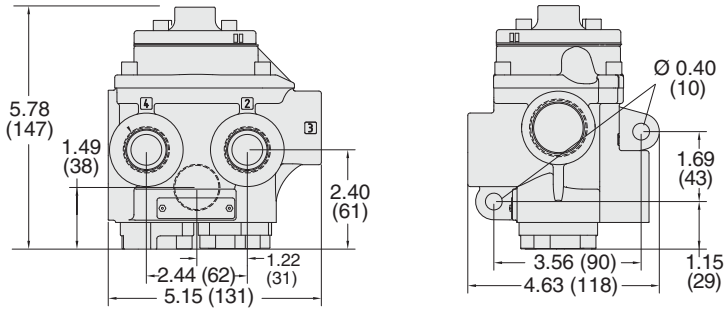

Body Size 1-1/4

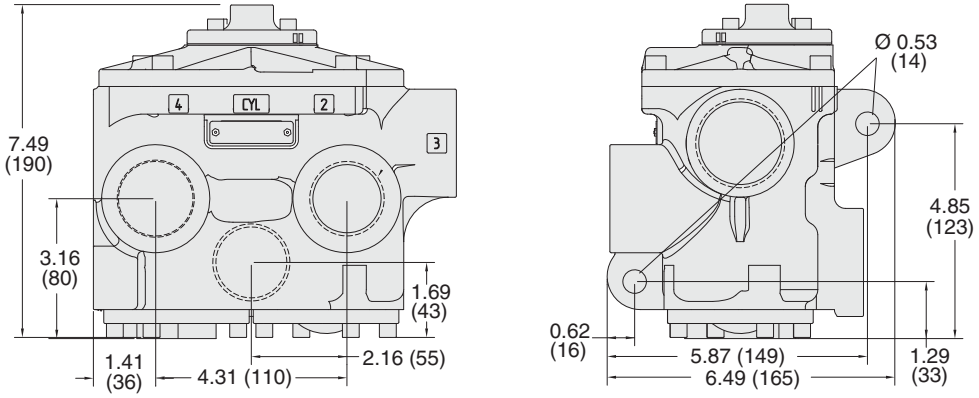

Downloadable CAD models available.

EXHAUST SILENCERS





Illustration example.

Silencers

SPECIFICATIONS	Silencer Material	Pressure Range psig (bar)	Schematic
	Aluminum	0-290 (0-20) maximum	

Port Size	Thread Type	Flow C_v (Nl/min)	Model Number		Dimensions inches (mm)		≈ Weight lb (kg)
			NPT Thread	R/Rp Thread	Length	Hex Size (D)	
1/2	Male	6.8 (6700)	5500A4003	D5500A4003	3.6 (9)	1.25 (32)	0.2 (0.1)
1	Male	18 (18000)	5500A6003	D5500A6003	5.4 (14)	2.0 (51)	0.9 (0.4)
1-1/2	Female	39 (38000)	5500A8001	D5500A8001	5.7 (14)	2.5 (64)	1.3 (0.6)
2-1/2	Female	104 (100000)	5500A9002	D5500A9002	4.0 (102)	5.7 (145)	2.9 (1.4)

FEMALE SILENCER CONNECTORS

Hex Nipples

Material	Fitting Pipe Size	Thread Type	Model Number		
			NPT Thread	BSPT Thread	
Steel	1-1/2	Male - Male	488J27	122J39	
	2-1/2	Male - Male	490J27	123J39	

© 2026, ROSS®. All Rights Reserved.

SOLENOID PILOT INDICATOR LIGHT KITS




Illustration example.

	Kit Number		
Indicator Light Kits	**24 V DC**	**110-120 V AC, 50-60 Hz**	**230 V AC, 50-60 Hz**
	862K87-W	862K87-Z	862K87-Y
	To visually verify valve operation, indicator light kits are available for single solenoid models. Indicator lights are standard on double solenoid valves. The indicator light is illuminated when the solenoid is energized.		

SOLENOID PILOT MANUAL OVERRIDE KITS

Flush Button	Extended Button	Extended Button with Palm
		

Illustration examples.

	Manual Override Type	Kit Number	
		Locking Type	**Non-Locking Type**
Manual Override Kits	Flush Button	792K87	–
	Extended Button	–	791K87
	Extended Button with Palm	–	984H87
	Flush rubber button, non-locking manual override is standard on single solenoid models. Flush metal-button, non-locking manual overrides are standard on direct double solenoid models. Each of the buttons in the override kits is made of metal and is spring-returned. The locking type button, however, can be kept in the actuated position by turning the slot in the top of the button with a screwdriver.		

Notes

© 2026, ROSS®. All Rights Reserved.

CAUTIONS, WARNINGS And STANDARD WARRANTY

ROSS OPERATING VALVE, ROSS CONTROLS®, ROSS DECCO®, AUTOMATIC VALVE INDUSTRIAL, and MASTER PNEUMATIC, collectively the "ROSS Global Family".

PRE-INSTALLATION or SERVICE

1. Before servicing a valve or other pneumatic component, be sure all sources of energy are turned off, the entire pneumatic system is shut down and exhausted, and all power sources are locked out (ref: OSHA 1910.147, EN 1037).

2. All ROSS Global Family Products, including service kits and parts, should be installed and/or serviced only by persons having training and experience with pneumatic equipment. Because any product can be tampered with and/or need servicing after installation, persons responsible for the safety of others or the care of equipment must check ROSS Global Family Products on a regular basis and perform all necessary maintenance to ensure safe operating conditions.

3. All applicable instructions should be read and complied with before using any fluid power system to prevent harm to persons or equipment. In addition, overhauled or serviced valves must be functionally tested prior to installation and use. If you have any questions, call your nearest ROSS Global Family location.

4. Each ROSS Global Family Product should be used within its specification limits. In addition, use only ROSS Global Family components to repair ROSS Global Family Products.

WARNINGS:
Failure to follow these instructions can result in personal injury and/or property damage.

FILTRATION and LUBRICATION

1. Dirt, scale, moisture, etc., are present in virtually every air system. Although some valves are more tolerant of these contaminants than others, best performance will be realized if a filter is installed to clean the air supply, thus preventing contaminants from interfering with the proper performance of the equipment. The ROSS Global Family recommends a filter with a 5-micron rating for normal applications.

2. All standard ROSS Global Family filters and lubricators with polycarbonate plastic bowls are designed for compressed air applications only. Use the metal bowl guard, where provided, to minimize danger from high pressure fragmentation in the event of bowl failure. Do not expose these products to certain fluids, such as alcohol or liquefied petroleum gas, as they can cause bowls to rupture, creating a combustible condition and hazardous leakage. Immediately replace crazed, cracked, or deteriorated bowls.

3. Only use lubricants which are compatible with materials used in the valves and other components in the system. Normally, compatible lubricants are petroleum base oils with oxidation inhibitors, an aniline point between 180°F (82°C) and 220°F (104°C), and an ISO 32, or lighter, viscosity. Avoid oils with phosphate type additives which can harm polyurethane components, potentially leading to valve failure which risks personal injury, and/or damage to property.

WARNINGS:
Failure to follow these instructions can result in personal injury and/or property damage.

AVOID INTAKE/EXHAUST RESTRICTION

1. Do not restrict air flow in the supply line. To do so could reduce the pressure of the supply air below minimum requirements for the valve and thereby causing erratic action.

2. Do not restrict a valve's exhaust port as this can adversely affect its operation. Exhaust silencers must be resistant to clogging and must have flow capacities at least as great as the exhaust capacities of the valves. Contamination of the silencer can result in reduced flow and increased back pressure.

WARNINGS:
Failure to follow these instructions can result in personal injury and/or property damage.

SAFETY APPLICATIONS

1. Mechanical Power Presses and other potentially hazardous machinery using a pneumatically controlled clutch and brake mechanism must use a press control double valve with a monitoring device. A double valve without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All double valve installations involving hazardous applications should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.

2. Safe Exhaust (dump) valves without a self-contained monitoring device should be used only in conjunction with a control system which assures monitoring of the valve. All Safe Exhaust valve installations should incorporate a monitoring system which inhibits further operation of the valve and machine in the event of a failure within the valve mechanism.

3. Per specifications and regulations, lockout valves are defined as energy isolation devices, NOT AS EMERGENCY STOP DEVICES.

WARNINGS: ***Failure to follow these instructions can result in personal injury and/or property damage.***

STANDARD WARRANTY

All products sold by the ROSS Global Family are warranted for a one-year period [with the exception of Valves for the Transport Industry which are warranted for two-year, and the Air Preparation products which are warranted for a period of seven (7) years] from the date of purchase. All products are, during their respective warranty periods, warranted to be free of defects in material and workmanship. The ROSS Global Family's obligation under this warranty is limited to repair, replacement or refund of the purchase price paid for products which the ROSS Global Family has determined, in its sole discretion, are defective. All warranties become void if a product has been subject to misuse, misapplication, improper maintenance, modification, or tampering. Products for which warranty protection is sought must be returned to the ROSS Global Family freight prepaid.

THE WARRANTY EXPRESSED ABOVE IS IN LIEU OF AND EXCLUSIVE OF ALL OTHER WARRANTIES AND THE ROSS GLOBAL FAMILY EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES EITHER EXPRESSED OR IMPLIED WITH RESPECT TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. THE ROSS GLOBAL FAMILY MAKES NO WARRANTY WITH RESPECT TO ITS PRODUCTS MEETING THE PROVISIONS OF ANY GOVERNMENTAL OCCUPATIONAL SAFETY AND/OR HEALTH LAWS OR REGULATIONS. IN NO EVENT IS THE ROSS GLOBAL FAMILY LIABLE TO PURCHASER, USER, THEIR EMPLOYEES OR OTHERS FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES WHICH MAY RESULT FROM A BREACH OF THE WARRANTY DESCRIBED ABOVE OR THE USE OR MISUSE OF THE PRODUCTS. NO STATEMENT OF ANY REPRESENTATIVE OR EMPLOYEE OF THE ROSS GLOBAL FAMILY MAY EXTEND THE LIABILITY OF THE ROSS GLOBAL FAMILY AS SET FORTH HEREIN.

ROSS a global family

950 Woodward Heights, Ferndale, Michigan 48220 US

Global Locations

Americas	USA	**ROSS** CONTROLS	+1-248-764-1800	www.rosscontrols.com
	Canada	**ROSS** CANADA	+1-416-251-7677	www.rosscanada.com
	Mexico	**ROSS** MEXICO	+52-81-2130-2570	www.rossmexico.com
	Brazil	**ROSS** BRASIL	+55-11-4335-2200	www.rosscontrols.com.br
Europe	Germany	**ROSS** EUROPA	+49 (0)6103-7597-100	www.rosseuropa.com
	France	**ROSS** FRANCE	+33-(0)1-49-45-65-65	www.rossfrance.com
	United Kingdom	**ROSS** UK	+44 (0)1254 872277	www.rossuk.co.uk
Asia & Pacific	China	**ROSS** CONTROLS CHINA	+86-21-6915-7961	www.rosscontrolschina.com
	India	**ROSS** CONTROLS INDIA	+91-44-2624-9040	www.rosscontrolsindia.com
	Japan	**ROSS** ASIA	+81-42-778-7251	www.rossasia.co.jp

Automatic Valve www.automaticvalve.com | Decco www.rossdecco.com | manufactIS www.manufactis.net | mp www.masterpneumatic.com | pneumatrol www.pneumatrol.com | UBSafe www.ubsafe.com

 © 2026, ROSS®, All Rights Reserved.