

CVMN SERİSİ MADEN ÇEKVALF NİPEL



CVMN Serisi Hidrolik Maden Çek Valfleri, hidrolik akışkanın hat boyunca sadece tek yönde akmasına izin veren iki yollu valf çeşididir. Kısma noktalarının by-pass işleminde, akışkanın bir yönde engellenmesinde, tanka tahliye valfi olarak ve devrelerde belirli bir karşı basınç üretilmesi için ön gerilim (tutma) valfi olarak kullanılmaktadır. CVMN Serisi Hidrolik Maden Çek Valfleri Madencilik sektörü uygulamalarında kullanılırlar.


Gövde Malzemesi	Otomat Çeliği
Bağlantı Şekli	BSP - Rd
Sızdırmazlık	Nitril O-ring (NBR)
Çalışma Sıcaklığı	-30 °C ile +110 °C
Kaplama	Galvaniz (Chrome III Pasivasyon)
Kullanım Alanı	Madencilik sektörü uygulamalarında

CVMN SERIES MINING CHECK VALVE NIPPEL



CVMN Series Hydraulic Mining Check Valves are two-way valves that allow hydraulic fluid to flow only one way along the line. It is used in the by-pass operation of the throttle points, in preventing the fluid while traveling, as a relief valve to the tank and as a pre-tension (holding) valve to generate a certain counter pressure in the circuits.
CVMN Series Hydraulic Mining Check Valves are used in mining industry applications.

Body Material	Carbon Steel
Connection Type	BSP - Rd
Sealing	Nitrile O-ring (NBR)
Working Temperature	-30 °C and +110 °C
Plating	Zinc Plating (Cr III Passivation)
Applications	General Mining Sector Applications

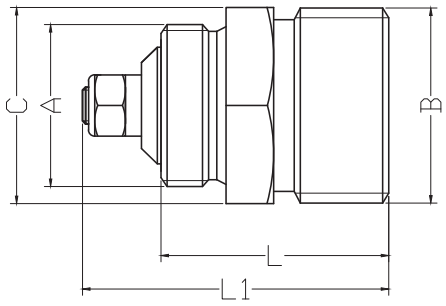

Teknik Özellikler
Technical Specifications

Kod (Code)	Çalışma Basıncı (Working Pressure) Bar	Ölçüler - mm (Dimensions - mm)				
		A	B	C	L	L1
CVMNG34RD32N	40	3/4" BSP	Rd 32x1/8"	AA 32	45.50	59
CVMNG1RD32N	40	1" BSP	Rd 32x1/8"	AA 32	-	-
CVMNG1RD38N	40	1" BSP	Rd 38x1/8"	AA 38	55	70