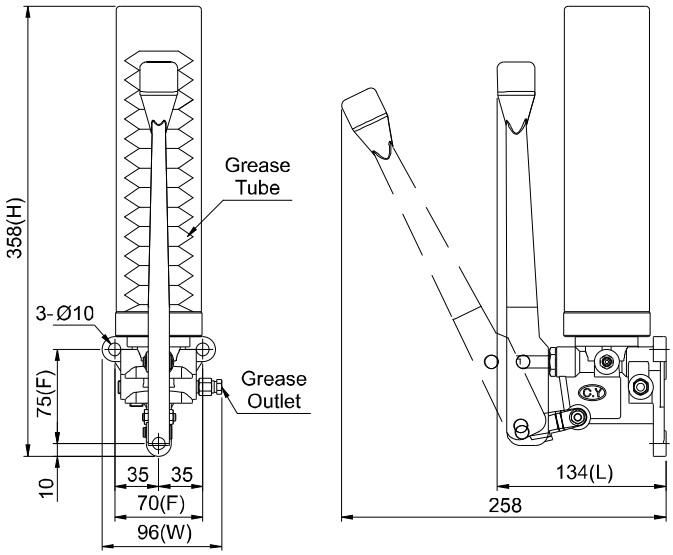
CLHA-25 Resistance Type Grease Tube Manual Lubricator

CHEN YING



CLHA-25-R-D-1-A with Grease Tube



Dimensional Drawing of CLHA-25-R-D-1-A with Grease Tube

◆Features

1. CLHA-25 discharges grease whenever its handle is pulled and pushed back.
2. The outlet of CLHA-25 can be on either the right side or the left side of the handle. A dual-outlet model is also available for selection.
3. CLHA-25 works with a 400cc disposable grease tube. When the grease is empty, replace CLHA-25 with a new grease tube. Standard CLHA-25 does not include a grease tube but is available upon request.
4. CLHA-25 has a protective cover that prevents the grease tube from being damaged.
5. CLHA-25 is suitable for machines that do not require continuous lubrication, such as press machines and woodworking machines.

◆Technical Data & Dimensional Data

Model	Effective Capacity	Length (mm)	Width (mm)	Height (mm)	Fixed Hole Distance (mm)	Max. Discharge Volume	Max. Operating Pressure	Discharge Bore	Suitable Viscosity	N.W. (kg)
CLHA-25	400cc Grease Tube	134	96	358	70x75	2cc/stroke	100 kgf/cm²	Ø4 Ø6 Ø8 PT1/8	Grease NLGI 0, 1	1.06

◆Order Code

CLHA-25 — R — D — 1 — A — ※

Outlet Side	
L	Left Outlet
R	Right Outlet
D	Dual Outlets

Outlet Adapter	
D	Straight Adapter
H	Elbow Adapter

Discharge Bore	
0	Ø4
1	Ø6
2	Ø4 W/Pressure Gauge
3	Ø6 W/Pressure Gauge
4	Ø8
5	Ø8 W/Pressure Gauge
6	PT1/8
7	PT1/8 W/Pressure Gauge

Grease Tube Thread	
A	M15xP2.5
B	M15xP2.0


Special Request	
T0	Add a 400cc Grease Tube, NLGI 0
T1	Add a 400cc Grease Tube, NLGI 1

※ The 400cc grease cartridges we supply are for the CLHA-25 models, and the grease tube thread is M15xP2.5.

◆Related Products


P. 85


P. 81


P. 82



P. 83


P. 111


P. 113


P. 131


P. 126


P. 125