

SCHEDA - *CARD*	PRODOTTO - *PRODUCT*	SCHEMA - *SCHEMA*	VUC
G20/0			**VALVOLA UNIDIREZIONALE A CARTUCCIA** *CHECK VALVE CARTRIDGE TYPE*

APPLICAZIONE
Sono utilizzate come valvole unidirezionali per montaggio in apposite cavità ricavate direttamente sull'attuatore o sui blocchi.
MONTAGGIO
Inserire e avvitare nell'apposita cavità.
FUNZIONAMENTO
Il fluido passa libero da B verso A ed è bloccato in senso opposto garantendo un trafilamento nullo.
A RICHIESTA
Molle speciali con differenti pressioni di apertura - Tenuta in Viton.
NOTE COSTRUTTIVE
- VUC 20 Tenuta a sfera
- VUC 40 Tenuta a otturatore
- Corpo in acciaio zincato
- Componenti interni trattati termicamente
- Non ammette trafilamenti.

APPLICATION
They are used as unidirectional valves to be fitted into suitable cavities on the acturator or manifolds.
INSTALLATION
Fit the valve into a suitable cavity.
OPERATION
This valve allows flow from port B to port A and blocks the flow in the opposite direction. No leakage occurs during the operation.
OPTIONAL
Special springs (for different cracking pressures) - Viton seals.
FEATURES
- *VUC 20 Ball type*
- *VUC 40 Poppet type*
- *Zinc plated steel body*
- *Hardened internal components*
- *No leakage.*

CARATTERISTICHE - *HYDRAULIC FEATURES*		
Pressione max *Max pressure (bar)*	350	300
Portata max *Max Flow (l/min)*	20	40
Pressione d'apertura *Cracking Pressure (bar)*	4	0.5

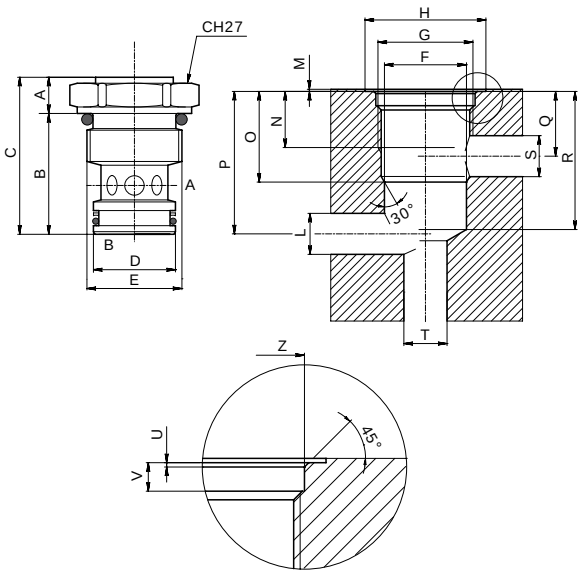

DIMENSIONI E PESI - *EXTERNAL DIMENSIONS AND WEIGHTS*

Dimensione *Dimension*	B	C	D H7	E	H	L	M	N	O	P	Q	S max	T max	R	U	V	Z	CH	Peso *Weight (kg)*
20	27.5	39.5	12.7	3/4-16 UNF	28	9	0.5	15	20.6	32	13	9	11	31	-	2.7	20.5	22	0.053
40	28	34.5	19	M22x1.5	28	9.5	0.5	13	21	33	15	9	18	32	0.5	3.3	23	27	0.075

CODICE ORDINAZIONE - *ORDERING CODE*

VUC		
	Portata nominale *Nominal flow (l/min)*	
	20	
	40	

ESEMPIO ORDINAZIONE - *ORDERING CODE EXAMPLE*

VUC 40	VUC - Portata Nominale l/min 40 / *VUC - Nominal flow 40 l/min*