
DOUBLE ACTION
PILOT OPERATION CHECK VALVE



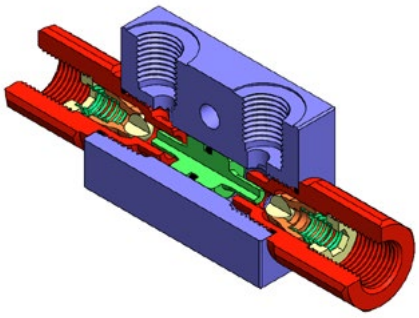

CLICK HERE
FOR 3D SECTION

TECHNICAL FEATURES AND OPTIONS

Working Temperature	-20 °C / +100 °C
Flow Rate	Up to 50 l / min
Material	Carbon Steel
Operating Pressure	Up to 350 Bar
Available Threads	BSP
Available Sizes	From 1/4" to 1/2"
Sealing Description	NBR

MAIN APPLICATIONS

OIL & GAS | AGRICULTURE | HYDRAULIC INDUSTRY | EARTH MOVING | HYDRAULIC EQUIPMENT | CONCRETE VEHICLES | VEHICLES | CHEMICAL INDUSTRY


INFORMATION


· OLEOCON Double Acting Pilot Operated Check Valves allows free-flow in one direction and blocks the flow in the other direction unless pilot pressure is applied.
· The internal components undergo heat treatment, in order to provide excellent sealing.
· Easy-to-use.

WARNING

· Please do not expose to abnormal operating conditions. (E.g. oscillations, impulse pressures, water hammering, cavitation, and proportions of solid materials and abrasives)
· Please do not touch the valve, when the working temperature is lower than -20°C or higher than +50°C.
· Make sure the system pressure is below the maximum working pressure.
· Please ensure the cleanliness of all connection surfaces to avoid dirt or dust accumulation in the circuit.
· Please ensure the alignment and full connection of the assembly parts.
· Please ensure that the OLEOCON product you have chosen is compatible with the temperature , material and pressure requirements of your system.
· Please contact OLEOCON technical support for any further questions.

TECHNICAL DRAWING

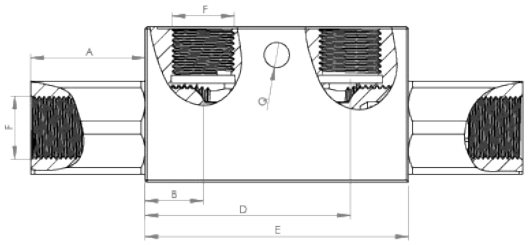

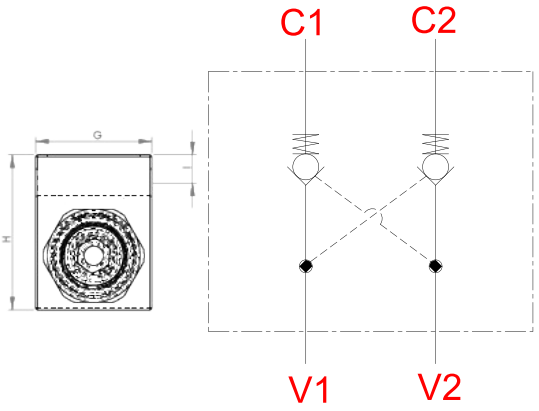

TECHNICAL CHARACTERISTICS										mm (inch)
CODE	F	A	B	D	E	C	L	Q	H	WEIGHT (Kg/lbs)
TLV-06-G14	1/4 BSPP	27	11,75	46,75	58,5	25	40	11,25	6,5	0,6 (1,32)
TLV-10-G38	3/8 BSPP	29,5	15	53	68	30	40	7,25	6,5	0,66 (1,45)
TLV-12-G12	1/2 BSPP	36	16,5	53,5	70	30	50	10	7	0,85 (1,87)
STEEL BODY										

ISO 1179-1 BSPPP