

RELIEF VALVE
(Ventable)

Ordering Code:	**RV-17A-X-Y-Z**

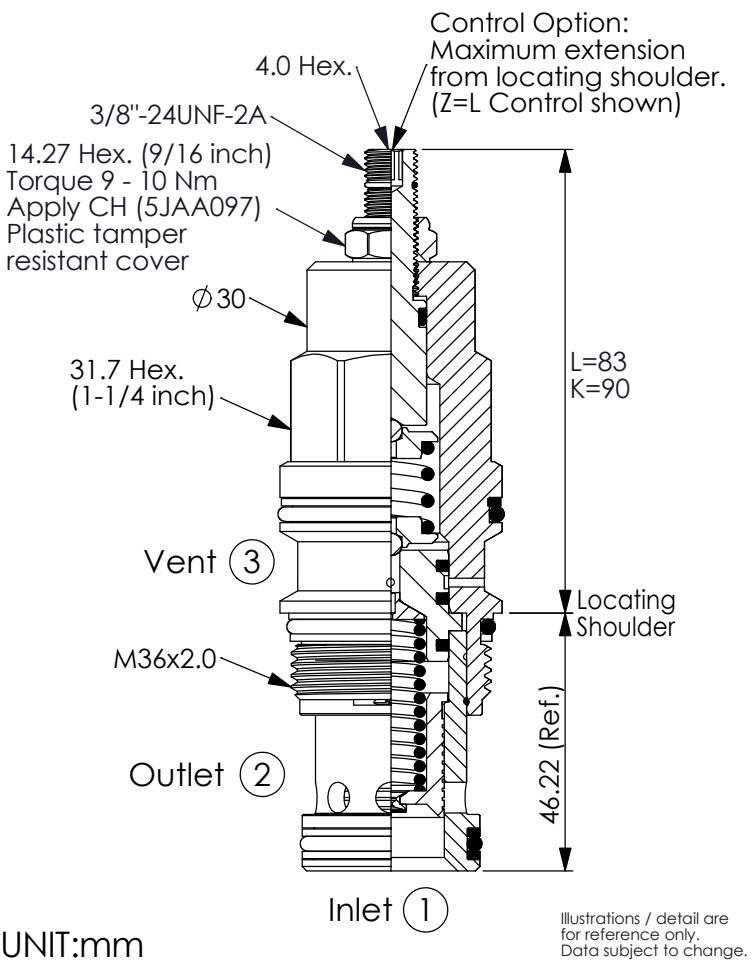

UNIT:mm

Illustrations / detail are for reference only. Data subject to change.




TECHNICAL DATA

Max. Operating pressure:	350	bar
Rated flow:	240	l/min
Cavity-Tooling:	17A-3	
Installation torque:	200 - 215	Nm
Weight:	0.61 (**Z**=L)	kg

Will accept maximum pressure at port ②; suitable for use in cross port relief circuits. If used in cross port relief circuits, consider spool leakage.




Typical Pressure Rise

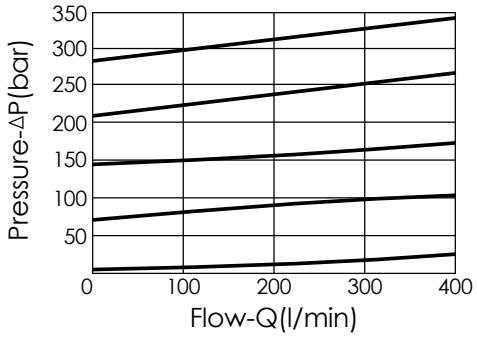

X	**OPERATION**	
30	Standard Type	

- Response Time-Typical (10 ms)
- Maximum Leakage Approximately (66 cc/min./70 bar)

Y	**SPRINGS**	
	ADJUSTMENT RANGES	
A	7 - 210 bar (70 bar Standard Setting)	
B	3.5 - 105 bar (70 bar Standard Setting)	
C	10.5 - 420 bar (70 bar Standard Setting)	
D	1.7 - 55 bar (28 bar Standard Setting)	
E	1.7 - 28 bar (14 bar Standard Setting)	
H	2 - 210 bar (70 bar Standard Setting)	
W	10.5 - 315 bar (70 bar Standard Setting)	

Z	**OPTIONS**		
L	Leakproof hex. socket screw.		
LP	Leakproof hex. socket screw. With stainless steel external metal components		
K	Handknob with Lock Knob. (Order Code: 6ZAK001)		
C	Stainless Steel Tamper Resistant Cover.	