


NG6 (CETOP 3) SANDWICH PRESSURE REDUCING VALVE



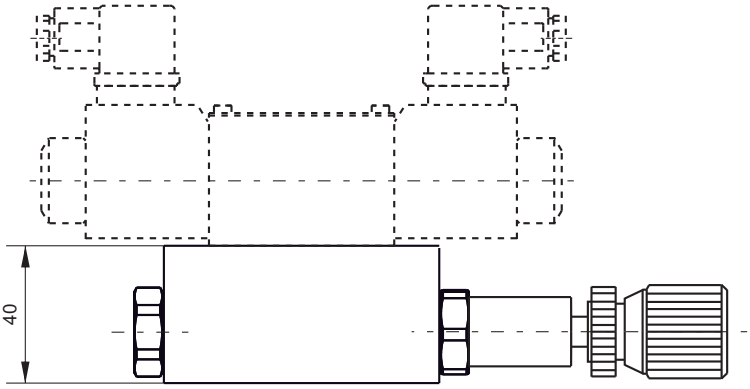

Mounting example



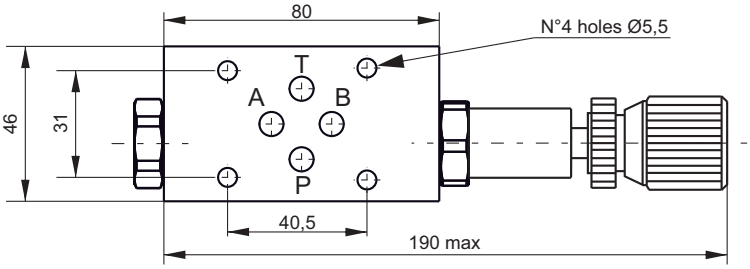

Main features

Max pressure	210 bar
Max flow	35 l/min
Weight	1,3 kg
Fixing bolts	4 M5x** bolts. 5Nm torque 10,9 class steel or above
Fluid temperature	-20 ÷ +80°C
Filtration	25 ÷ 50 µ


Spare part code

E6048300* — **NG6 (Cetop 3) pressure reducing valve**


1 — **Hydraulic scheme (see below):**
1: reducing on P
2: reducing on A
3: reducing on B

B — Spring range:
B: 7-70 bar
D: 70-210 bar


1 2 3

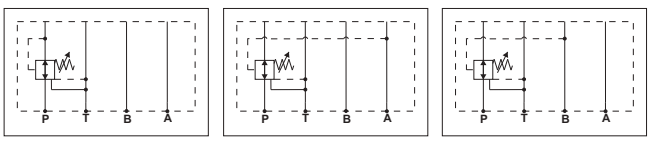

Pressure drop

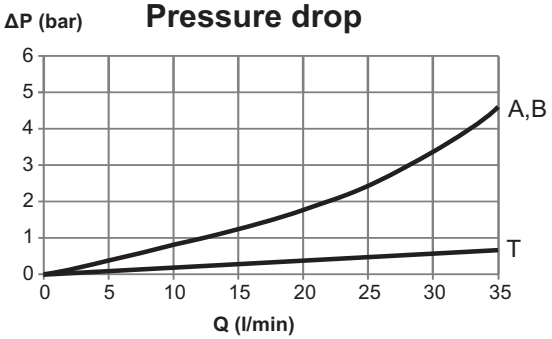

Pressure drop

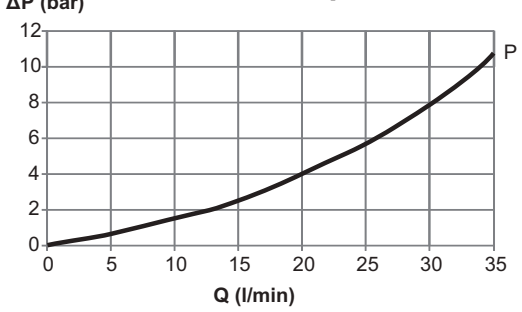

Minimum adjustable P

